



**PEERLESS®**

# Below-the-Hook & Material Handling Equipment

Visit Us Online:  
[kitocrosby.com/peerless](http://kitocrosby.com/peerless)

800-334-5643

[CustomLifting.PCC@kitocrosby.com](mailto:CustomLifting.PCC@kitocrosby.com)



**Kito Crosby** is the leading designer and manufacturer of Below-the-Hook Lifting and Material Handling Equipment. Lifting and material handling devices are used in almost every type of manufacturing environment and are used in conjunction with hoists, cranes, and fork trucks along with standalone applications.

Our ISO 9001 certified factory located in **South Holland, Illinois**, has been manufacturing high-quality overhead lifting and material handling devices for over 50 years. The facility is equipped with the most up to date manufacturing processes and equipment in areas such as:



**machining,  
metalworking,  
and welding.**

Select equipment from our comprehensive standardized product catalog which features our **"QUICK SHIP"** and **"IN STOCK"** programs. We also can design and manufacture a **"CUSTOM LIFTING DEVICE"** to fit your specific application using materials from carbon, alloy, or stainless steel.



- All designs are engineered in accordance with **ASME B30.20 / BTH-1** and incorporate application conditions along with a detailed analysis of allowable stresses to determine fatigue life
- Standard products are designed to **ASME BTH-1 Design Category B Service Class 2**
- Greater Design Categories and Service Classes are available
- All welding is performed by certified welders in accordance with **AWS D14.1/D14.1M/D1.6** and **ASME BTH-1**
- All Peerless Below-the-Hook lifting devices are tagged in accordance with **ASME B30.20**
- All Peerless Below-the-Hook Lifting devices are **Proof-Tested to 125% capacity** and certificates are supplied at **"NO ADDITIONAL CHARGE"**

Our qualified staff has the expertise to design and manufacture exceptional quality products, quickly and competitively, to satisfy the individual requirements of customers within many different industries.

- **Renewable Energy**
- **Construction**
- **Automotive**
- **Military**
- **Chemical**
- **Steel Service**
- **Aerospace**
- **Industrial**
- **Agricultural**
- **Marine**
- **Machinery**
- **Petroleum**
- **Food Industry**
- **Paper Mills**
- **Heavy Truck**
- **Transportation**

Whether you choose from our extensive selection of standardized lifting solutions that include:

- **Lifting Beams**
- **Spreader Beams**
- **Roll Lifters**
- **Coil Lifters**
- **Tongs**
- **Sheet Lifters**
- **Pallet Lifters**
- **Fork Truck Accessories**

Or from our line of Material Handling Equipment:

- **Material Stands**
- **Material Baskets**



**SELECT A LIFTING SOLUTION THAT IS DESIGNED AND MANUFACTURED TO MEET YOUR SPECIFIC NEED.**



**OVER 100 YEARS OF EXPERIENCE.** Our combined Qualified Sales, Engineering, and Manufacturing staff are available to solve all your Below-the-Hook Lifting and Material Handling Equipment requirements.

Contact your nearby Peerless Distributor or visit our website at [kitocrosby.com/peerless](http://kitocrosby.com/peerless)



Select products from our standard offering or we can design and manufacture a custom lifting device to fit your specific application from carbon, alloy, stainless, aluminum, or other specialty metals. Our experienced sales, engineering, and manufacturing staff are available to solve all of your below-the-hook lifting requirements.

- 100% of ALL Peerless lifting products are proof-tested.
- Horizontal proof test capabilities up to 1,200,000 lbs.
- Vertical proof test capabilities up to 450,000 lbs & 40 feet in length.
- Certified to OSHA & ASME Standards.
- Capable of manufacturing to government & military specifications.
- Capable of bending up to 5" diameter round bar.
- We offer safety training & inspection services both in-house & on-site, including repairs & modifications.

## LIFTING EQUIPMENT

Lifting Beams	04 - 30
Spreader Beams	31 - 42
Roll Lifters	43 - 48
Coil Lifters	49 - 57
Tongs	59 - 61
Sheet Lifters	62 - 65
Pallet Lifters	67 - 75
Fork Truck Accessories	77 - 82
Material Handling	83 - 87
Safety Guidelines	88 - 90
Glossary & Index	91 - 92

visit us online at:  
**[kitocrosby.com/peerless](http://kitocrosby.com/peerless)**

**Our Website Contains a Full Line of Chain and Accessory Products Ready to View**

Browse our website to learn more about our company and products; download current literature and much more!

LIFTING BEAMS

SPREADER BEAMS

ROLL LIFTERS

COIL LIFTERS

TONGS

SHEET LIFTERS

PALLET LIFTERS

FORK TRUCK ACC.

MAT. HANDLING

SAFETY GUIDE

INDEX

# LIFTING EQUIPMENT

## SSLB

SHORT SPAN LIFTING BEAM

PLATE STYLE .....Page 5



## ABLB

ADJUSTABLE BAIL LIFTING BEAM .....Page 19-21



## SDLB

STANDARD DUTY LIFTING BEAM

CHANNEL DESIGN .....Page 6-8



## LLB

LOAD LEVELING BEAM .....Page 22-23



## SDLB

STANDARD DUTY LIFTING BEAM

I-BEAM DESIGN w/FLAME CUT BAIL .....Page 9-10



## TPLB

THREE POINT LIFTING BEAM .....Page 24



## SDLB

STANDARD DUTY LIFTING BEAM

I-BEAM DESIGN w/PIN BAIL .....Page 11



## FPLB

FOUR POINT LIFTING BEAM .....Page 25



## BSLB

BASKET SLING LIFTING BEAM .....Page 12-14



## FPSL

FOUR POINT SACK LIFTER BEAM .....Page 26



## DCLB

DUAL CRANE LIFTING BEAM .....Page 15-16



## FPAB

FOUR POINT ADJUSTABLE BEAM .....Page 27



## UNVB

UNIVERSAL LIFTING/SPREADER BEAM .....Page 17



## DCRB

DUAL CRANE ROTATING BEAM .....Page 28



## ALB

ADJUSTABLE LIFTING BEAM .....Page 18




## CGCLB

CHLORINE GAS CYLINDER LIFTING BEAM... Page 29



## SSLB SHORT SPAN LIFTING BEAM PLATE STYLE



 Products eligible for Quick Ship display a QS icon.

### FEATURES


- This style of lifting beam is ideal for short span applications and can be utilized where headroom is limited.
- Supplied with a pair of shackles and one standard spread.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.









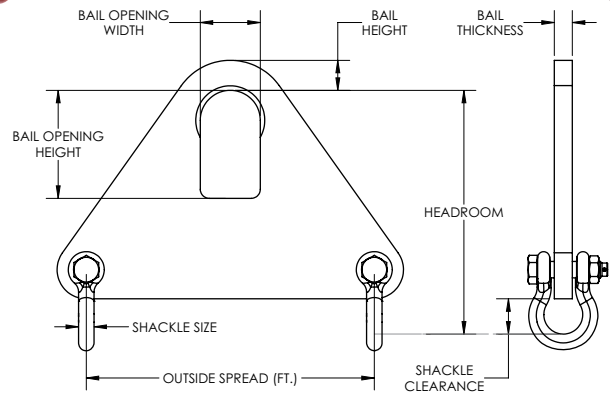




### OPTIONS

- Additional lift points
- Higher capacities (supplied w/upper shackle)
- Additional lengths
- Upper shackle
- Upper shackle w/oblong link
- Hooks



Shackle Option



Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)							Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Shackle Size	Shackle Clearance	
 SSLB-25-1	1/4	1	7	0.63	2	4	0.50	3/8	0.9	8
 SSLB-25-2	1/4	2	8	0.63	2	4	0.50	3/8	0.9	17
 SSLB-25-3	1/4	3	11-3/4	0.63	2	4	0.50	3/8	0.9	36
 SSLB-1-1	1	1	9	0.88	3	5	0.75	5/8	1.6	18
 SSLB-1-2	1	2	10-1/4	0.88	3	5	0.75	5/8	1.6	36
 SSLB-1-3	1	3	12-3/4	0.88	3	5	0.75	5/8	1.6	63
 SSLB-3-1	3	1	9-3/4	1.25	3	5	1	3/4	1.8	30
 SSLB-3-2	3	2	11-3/4	1.25	3	5	1	3/4	1.8	58
 SSLB-3-3	3	3	14-1/2	1.25	3	5	1	3/4	1.8	100
 SSLB-10-2	10	2	16	2.00	4	7	1.25	7/8	2.1	103
 SSLB-10-3	10	3	20-1/4	2.00	4	7	1.25	7/8	2.1	178
 SSLB-20-2	20	2	20-1/4	2.50	5	9	1.50	1-1/4	3.1	170
 SSLB-20-3	20	3	25	2.50	5	9	1.50	1-1/4	3.1	278
SSLB-40-2	40	2	28	3.50	7	16	2.50	1-3/4	4.5	427
SSLB-40-3	40	3	30-3/4	3.50	7	16	2.50	1-3/4	4.5	619
SSLB-50-2	50	2	28	3.63	7	16	2.50	1-3/4	4.5	432
SSLB-50-3	50	3	32	3.63	7	16	2.50	1-3/4	4.5	648
SSLB-70-2	70	2	31-1/2	4.00	7	18	3.00	2	4.8	632
SSLB-70-3	70	3	34-1/2	4.00	7	18	3.00	2	4.8	894
SSLB-110-2	110	2	37-1/4	5.25	8	20	3.50	2-1/2	7	974
SSLB-110-3	110	3	39-1/2	5.25	8	20	3.50	2-1/2	7	1289
SSLB-149-2	149	2	43	6.00	9	22	4	3	8.8	1369
SSLB-149-3	149	3	44-1/2	6.00	9	22	4	3	8.8	1735
SSLB-170-2	170	2	45	6.50	10	24	4	3	8.2	1438
SSLB-170-3	170	3	47-1/2	6.50	10	24	4	3	8.2	1854
SSLB-195-2	195	2	48	6.50	10	24	5	3-1/2	9.7	2157
SSLB-195-3	195	3	48	6.50	10	24	5	3-1/2	9.7	2595

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT



## STANDARD DUTY LIFTING BEAM CHANNEL DESIGN




Products eligible for Quick Ship display a QS icon.

### FEATURES

- This style of lifting beam can be utilized where headroom is limited and comes with a pair of swivel hooks and three standard spreads (3' and 4' beams have two standard spreads).
- Three standard lift points for load adjustment: outside lift point, middle lift point (outside less 1'), inside lift point (middle less 1').
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS


- Additional lift points
- Higher capacities
- Additional lengths
- Lower headroom bail
- Additional hooks
- Shackle lugs
- Additional load pins
- Integrated beam stands

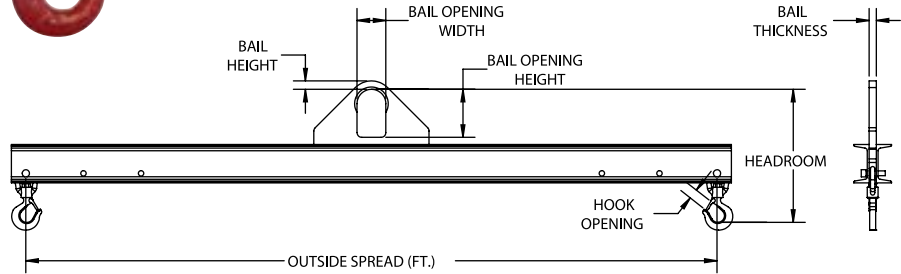

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
QS SDLB-1/2-3	1/2	3	13	0.88	3	5	0.75	0.91	40
QS SDLB-1/2-4	1/2	4	13	0.88	3	5	0.75	0.91	50
QS SDLB-1/2-6	1/2	6	13	0.88	3	5	0.75	0.91	65
QS SDLB-1/2-8	1/2	8	13	0.88	3	5	0.75	0.91	80
QS SDLB-1/2-10	1/2	10	14	0.88	3	5	0.75	0.91	125
QS SDLB-1/2-12	1/2	12	14	0.88	3	5	0.75	0.91	145
QS SDLB-1/2-14	1/2	14	15	0.88	3	5	0.75	0.91	210
QS SDLB-1/2-16	1/2	16	16	0.88	3	5	0.75	0.91	360
QS SDLB-1/2-18	1/2	18	17	0.88	3	5	0.75	0.91	465
QS SDLB-1/2-20	1/2	20	18	0.88	3	5	0.75	0.91	490
QS SDLB-1/2-24	1/2	24	20	0.88	3	5	0.75	0.91	765
QS SDLB-1/2-30	1/2	30	22	0.88	3	5	0.75	0.91	1280
QS SDLB-1-3	1	3	13	0.88	3	5	0.75	0.91	40
QS SDLB-1-4	1	4	13	0.88	3	5	0.75	0.91	50
QS SDLB-1-6	1	6	14	0.88	3	5	0.75	0.91	80
QS SDLB-1-8	1	8	14	0.88	3	5	0.75	0.91	105
QS SDLB-1-10	1	10	15	0.88	3	5	0.75	0.91	150
QS SDLB-1-12	1	12	16	0.88	3	5	0.75	0.91	275
QS SDLB-1-14	1	14	17	0.88	3	5	0.75	0.91	365
QS SDLB-1-16	1	16	18	0.88	3	5	0.75	0.91	390
QS SDLB-1-18	1	18	19	0.88	3	5	0.75	0.91	505
QS SDLB-1-20	1	20	20	0.88	3	5	0.75	0.91	640
QS SDLB-1-24	1	24	22	0.88	3	5	0.75	0.91	1025

\* 1 US Ton = 2,000 Lbs


cont.



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.




















































# LIFTING BEAMS



 Products eligible for Quick Ship display a QS icon.

## STANDARD DUTY LIFTING BEAM CHANNEL DESIGN cont.

LIFTING BEAMS

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
 SDLB-2-3	2	3	13	0.88	3	5	0.75	0.91	40
 SDLB-2-4	2	4	14	0.88	3	5	0.75	0.91	60
 SDLB-2-6	2	6	15	0.88	3	5	0.75	0.91	95
 SDLB-2-8	2	8	16	0.88	3	5	0.75	0.91	150
 SDLB-2-10	2	10	17	0.88	3	5	0.75	0.91	265
 SDLB-2-12	2	12	18	0.88	3	5	0.75	0.91	295
 SDLB-2-14	2	14	19	0.88	3	5	0.75	0.91	400
 SDLB-2-16	2	16	22	0.88	3	5	0.75	1.00	690
 SDLB-2-18	2	18	22	0.88	3	5	0.75	1.00	775
 SDLB-2-20	2	20	22	0.88	3	5	0.75	1.00	860
 SDLB-2-24	2	24	25	0.88	3	5	0.75	1.00	1665
 SDLB-3-3	3	3	14	1.25	3	5	1	1	55
 SDLB-3-4	3	4	15	1.25	3	5	1	1	80
 SDLB-3-6	3	6	16	1.25	3	5	1	1	155
 SDLB-3-8	3	8	17	1.25	3	5	1	1	225
 SDLB-3-10	3	10	18	1.25	3	5	1	1	260
 SDLB-3-12	3	12	20	1.25	3	5	1	1	400
 SDLB-3-14	3	14	22	1.25	3	5	1	1	620
 SDLB-3-16	3	16	22	1.25	3	5	1	1	705
 SDLB-3-18	3	18	26	1.25	3	5	1	1.36	1280
 SDLB-3-20	3	20	26	1.25	3	5	1	1.36	1420
 SDLB-3-24	3	24	26	1.25	3	5	1	1.36	1690
 SDLB-5-3	5	3	18	2	4	7	1.25	1.36	100
 SDLB-5-4	5	4	19	2	4	7	1.25	1.36	145
 SDLB-5-6	5	6	20	2	4	7	1.25	1.36	210
 SDLB-5-8	5	8	22	2	4	7	1.25	1.36	280
 SDLB-5-10	5	10	24	2	4	7	1.25	1.36	380
 SDLB-5-12	5	12	25	2	4	7	1.25	1.36	570
 SDLB-5-14	5	14	30	2	4	7	1.25	1.61	1045
 SDLB-5-16	5	16	30	2	4	7	1.25	1.61	1185
 SDLB-5-18	5	18	30	2	4	7	1.25	1.61	1325
 SDLB-5-20	5	20	30	2	4	7	1.25	1.61	1470
 SDLB-5-24	5	24	33	2	4	7	1.25	1.61	2320
 SDLB-7.5-3	7.5	3	21	2	4	7	1.25	1.61	130
 SDLB-7.5-4	7.5	4	22	2	4	7	1.25	1.61	170
 SDLB-7.5-6	7.5	6	24	2	4	7	1.25	1.61	235
 SDLB-7.5-8	7.5	8	25	2	4	7	1.25	1.61	320
 SDLB-7.5-10	7.5	10	27	2	4	7	1.25	1.61	495
 SDLB-7.5-12	7.5	12	30	2	4	7	1.25	1.61	900
 SDLB-7.5-14	7.5	14	30	2	4	7	1.25	1.61	1050
 SDLB-7.5-16	7.5	16	30	2	4	7	1.25	1.61	1190
 SDLB-7.5-18	7.5	18	33	2	4	7	1.25	1.61	1640
 SDLB-10-3	10	3	22	2	4	7	1.25	1.61	145
 SDLB-10-4	10	4	23	2	4	7	1.25	1.61	165
 SDLB-10-6	10	6	25	2	4	7	1.25	1.61	260
 SDLB-10-8	10	8	27	2	4	7	1.25	1.61	410
 SDLB-10-10	10	10	30	2	4	7	1.25	1.61	770
 SDLB-10-12	10	12	30	2	4	7	1.25	1.61	910
 SDLB-10-14	10	14	30	2	4	7	1.25	1.61	1055
 SDLB-10-16	10	16	33	2	4	7	1.25	1.61	1475
 SDLB-10-18	10	18	33	2	4	7	1.25	1.61	1985

\*1 US Ton = 2,000 Lbs

cont.



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

LIFTING BEAMS



## STANDARD DUTY LIFTING BEAM cont. CHANNEL DESIGN

### FEATURES

- This style of lifting beam can be utilized where headroom is limited and comes with a pair of swivel hooks and three standard spreads (3' and 4' beams have two standard spreads).
- Three standard lift points for load adjustment: outside lift point, middle lift point (outside less 1'), inside lift point (middle less 1').
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**


### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Lower headroom bail
- Additional hooks
- Shackle lugs
- Additional load pins
- Integrated beam stands



**PEERLESS  
QUICKSHIP**

**QS** Products eligible for Quick Ship display a QS icon.

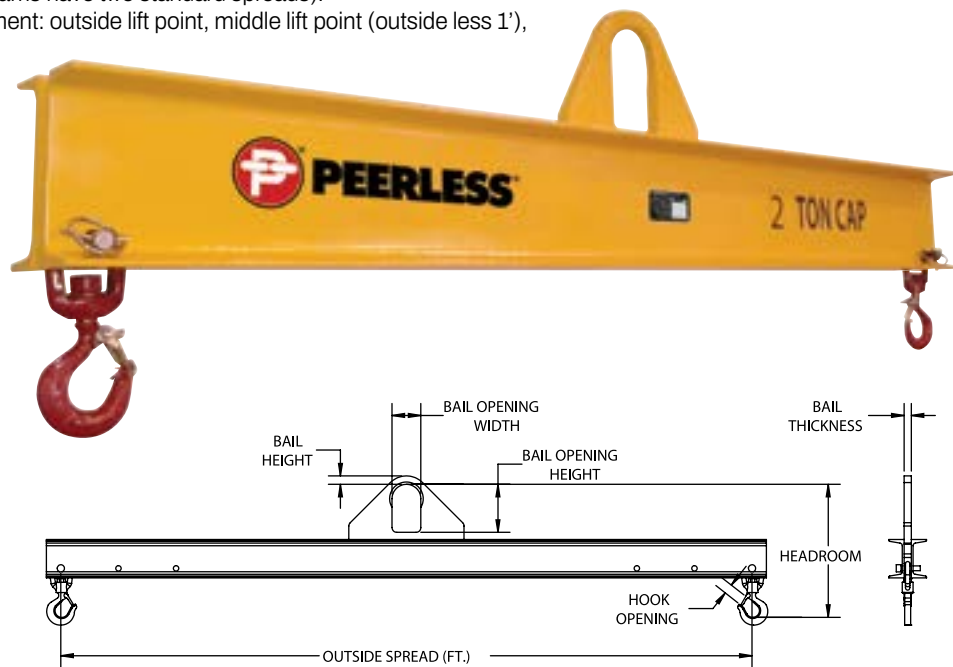

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
<b>QS</b> SDLB-15-3	15	3	26	2.5	5	9	1.5	2.08	190
<b>QS</b> SDLB-15-4	15	4	28	2.5	5	9	1.5	2.08	255
<b>QS</b> SDLB-15-6	15	6	30	2.5	5	9	1.5	2.08	385
<b>QS</b> SDLB-15-8	15	8	33	2.5	5	9	1.5	2.08	700
<b>QS</b> SDLB-15-10	15	10	33	2.5	5	9	1.5	2.08	835
<b>QS</b> SDLB-15-12	15	12	37	2.5	5	9	1.5	2.08	1195
<b>QS</b> SDLB-15-14	15	14	37	2.5	5	9	1.5	2.08	1460
<b>QS</b> SDLB-20-3	20	3	29	2.5	5	9	1.5	2.27	235
<b>QS</b> SDLB-20-4	20	4	31	2.5	5	9	1.5	2.27	320
<b>QS</b> SDLB-20-6	20	6	34	2.5	5	9	1.5	2.27	575
<b>QS</b> SDLB-20-8	20	8	34	2.5	5	9	1.5	2.27	710
<b>QS</b> SDLB-20-10	20	10	35	2.5	5	9	1.5	2.27	840
<b>QS</b> SDLB-20-12	20	12	38	2.5	5	9	1.5	2.27	1585
<b>QS</b> SDLB-25-4	25	4	38	3	6	12	1.75	3.02	415
<b>QS</b> SDLB-25-6	25	6	41	3	6	12	1.75	3.02	680
<b>QS</b> SDLB-25-8	25	8	41	3	6	12	1.75	3.02	815
<b>QS</b> SDLB-25-10	25	10	44	3	6	12	1.75	3.02	1462
<b>QS</b> SDLB-25-12	25	12	44	3	6	12	1.75	3.02	1700
<b>QS</b> SDLB-30-4	30	4	45	3.5	7	16	2	3.02	655
<b>QS</b> SDLB-30-6	30	6	45	3.5	7	16	2	3.02	790
<b>QS</b> SDLB-30-8	30	8	48	3.5	7	16	2	3.02	1330
<b>QS</b> SDLB-40-4	40	4	45	3.5	7	16	2.5	3.02	745
<b>QS</b> SDLB-40-6	40	6	48	3.5	7	16	2.5	3.02	1185

\*1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.



# LIFTING BEAMS

LIFTING BEAMS

## SDLB STANDARD DUTY LIFTING BEAM

I-BEAM DESIGN w/FLAME CUT BAIL

### FEATURES


- This style of lifting beam can be utilized where headroom is limited and comes with a pair of shackles & swivel hooks with three standard spreads.
- Standard I-Beam construction with special keyed-in bail design and integrated beam stands.
- Three standard lift points for load adjustment: outside lift point, middle lift point (outside less 1'), inside lift point (middle less 1').
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Lower headroom bail
- Additional hooks & shackles



Product shown with custom spreads

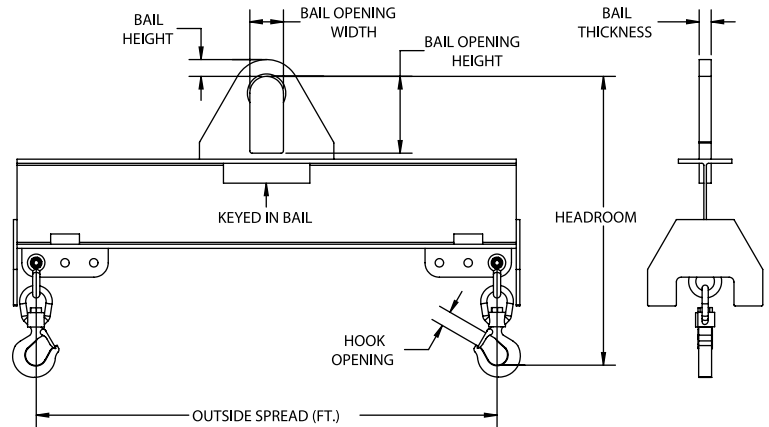

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
SDLB-1-30	1	30	26	0.88	3	5	0.75	0.89	1575
SDLB-1-34	1	34	24	0.88	3	5	0.75	0.89	1685
SDLB-1-38	1	38	24	0.88	3	5	0.75	0.89	2225
SDLB-1-42	1	42	26	0.88	3	5	0.75	0.89	2950
SDLB-2-30	2	30	26	0.88	3	5	0.75	0.89	1680
SDLB-2-34	2	34	24	1.50	3	5	1	0.89	2240
SDLB-2-38	2	38	25	1.50	3	5	1	0.89	2820
SDLB-2-42	2	42	27	1.50	3	5	1	0.89	3580
SDLB-3-30	3	30	28	1.25	3	5	1	1	1995
SDLB-3-34	3	34	27	1.5	3	5	1	1	2175
SDLB-3-38	3	38	28	1.5	3	5	1	1	3270
SDLB-3-42	3	42	29	1.5	3	5	1	1	4085
SDLB-5-30	5	30	30	2	4	7	1.25	1.36	2430
SDLB-5-34	5	34	32	2	4	7	1.25	1.36	3290
SDLB-5-38	5	38	34	2	4	7	1.25	1.36	4150
SDLB-5-42	5	42	34	2	4	7	1.25	1.36	5000
SDLB-7.5-20	7.5	20	33	2	4	7	1.25	1.61	1390
SDLB-7.5-24	7.5	24	33	2	4	7	1.25	1.61	1985
SDLB-7.5-30	7.5	30	33	2	4	7	1.25	1.61	2900
SDLB-7.5-34	7.5	34	37	2	4	7	1.25	1.61	3740
SDLB-7.5-38	7.5	38	37	2	4	7	1.25	1.61	5000
SDLB-7.5-42	7.5	42	37	2	4	7	1.25	1.61	6020

\* 1 US Ton = 2,000 Lbs

cont.



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT



## STANDARD DUTY LIFTING BEAM

I-BEAM DESIGN w/FLAME CUT BAIL cont.



Product shown with custom spread

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
SDLB-10-20	10	20	34	2	4	7	1.25	1.61	1540
SDLB-10-24	10	24	34	2	4	7	1.25	1.61	2180
SDLB-10-30	10	30	36	2	4	7	1.25	1.61	3310
SDLB-10-34	10	34	38	2	4	7	1.25	1.61	4515
SDLB-10-38	10	38	38	2	4	7	1.25	1.61	5495
SDLB-10-42	10	42	39	2	4	7	1.25	1.61	7260
SDLB-15-16	15	16	39	2.5	5	9	1.5	2.08	1430
SDLB-15-18	15	18	40	2.5	5	9	1.5	2.08	1690
SDLB-15-20	15	20	40	2.5	5	9	1.5	2.08	2015
SDLB-15-24	15	24	41	2.5	5	9	1.5	2.08	2825
SDLB-15-30	15	30	40	2.5	5	9	1.5	2.08	4470
SDLB-15-34	15	34	42	2.5	5	9	1.5	2.08	5400
SDLB-15-38	15	38	43	2.5	5	9	1.5	2.08	6655
SDLB-15-42	15	42	43	2.5	5	9	1.5	2.08	8840
SDLB-20-14	20	14	43	2.5	5	9	1.5	2.27	1270
SDLB-20-16	20	16	44	2.5	5	9	1.5	2.27	1590
SDLB-20-18	20	18	44	2.5	5	9	1.5	2.27	1980
SDLB-20-20	20	20	46	2.5	5	9	1.5	2.27	2340
SDLB-20-24	20	24	46	2.5	5	9	1.5	2.27	3315
SDLB-20-30	20	30	47	2.5	5	9	1.5	2.27	5295
SDLB-20-34	20	34	49	2.75	5	9	1.5	2.27	6565
SDLB-20-38	20	38	55	2.75	5	9	1.5	2.27	8580
SDLB-20-42	20	42	56	2.75	5	9	1.5	2.27	10430
SDLB-25-14	25	14	52	3	6	12	1.75	2.27	1620
SDLB-25-16	25	16	52	3	6	12	1.75	2.27	1995
SDLB-25-18	25	18	54	3	6	12	1.75	2.27	2345
SDLB-25-20	25	20	57	3	6	12	1.75	2.27	2865
SDLB-25-24	25	24	57	3	6	12	1.75	2.27	3870
SDLB-25-30	25	30	58	3	6	12	1.75	2.27	5810
SDLB-25-34	25	34	64	3	6	12	1.75	2.27	7800
SDLB-25-38	25	38	65	3	6	12	1.75	2.27	9555
SDLB-25-42	25	42	67	3	6	12	1.75	2.27	11800
SDLB-30-10	30	10	52	3.5	7	16	2	2.27	1210
SDLB-30-12	30	12	54	3.5	7	16	2	2.27	1465
SDLB-30-14	30	14	54	3.5	7	16	2	2.27	1780
SDLB-30-16	30	16	54	3.5	7	16	2	2.27	2155
SDLB-30-18	30	18	59	3.5	7	16	2	2.27	2500
SDLB-30-20	30	20	59	3.5	7	16	2	2.27	2995
SDLB-30-24	30	24	60	3.5	7	16	2	2.27	4240
SDLB-30-30	30	30	65	3.5	7	16	2	2.27	6015
SDLB-30-34	30	34	72	3.5	7	16	2	2.27	8330
SDLB-30-38	30	38	70	3.5	7	16	2	2.27	10605
SDLB-30-42	30	42	70	3.5	7	16	2	2.27	12915
SDLB-40-8	40	8	62	3.5	7	16	2.5	3.02	1260
SDLB-40-10	40	10	63	3.5	7	16	2.5	3.02	1630
SDLB-40-12	40	12	63	3.5	7	16	2.5	3.02	1935
SDLB-40-14	40	14	63	3.5	7	16	2.5	3.02	2335
SDLB-40-16	40	16	65	3.5	7	16	2.5	3.02	2520
SDLB-40-18	40	18	66	3.5	7	16	2.5	3.02	3255
SDLB-40-20	40	20	68	3.5	7	16	2.5	3.02	3865
SDLB-40-24	40	24	71	3.5	7	16	2.5	3.02	5170
SDLB-40-30	40	30	75	3.5	7	16	2.5	3.02	7155
SDLB-40-34	40	34	77	3.5	7	16	2.5	3.02	9780
SDLB-40-38	40	38	80	3.5	7	16	2.5	3.02	12075
SDLB-40-42	40	42	83	3.5	7	16	2.5	3.02	15240

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.



## STANDARD DUTY LIFTING BEAM

I-BEAM DESIGN w/PIN BAIL

### FEATURES


- This style of lifting beam can be utilized where headroom is limited & comes with a pair of shackles and three standard spreads.
- Standard I-Beam construction with pin bail & integrated beam stands.
- Three standard lift points for load adjustment: outside lift point, middle lift point (outside less 1'), inside lift point (middle less 1').
- Engineered & manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Swivel hooks
- Additional shackles



Product shown with custom spread

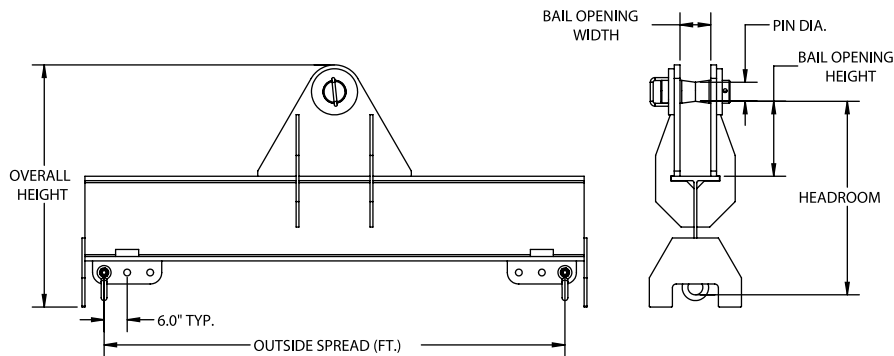

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)					Overall Width	Overall Height	Weight (Lbs.)
			Headroom	Pin Diameter	Bail Opening Width	Bail Opening Height				
SDLB-50-10	50	10	57	5	8	19.5	138	70	3313	
SDLB-50-15	50	15	58	5	8	19.5	198	71	4417	
SDLB-50-20	50	20	58	5	8	19.5	258	71	5935	
SDLB-65-10	65	10	58	5	8	19.5	138	71	3518	
SDLB-65-15	65	15	61	5	8	19.5	198	74	4735	
SDLB-65-20	65	20	64	5	8	19.5	258	77	6671	
SDLB-80-10	80	10	64	5.5	8	21.25	138	77	4212	
SDLB-80-15	80	15	67	5.5	8	21.25	198	80	5529	
SDLB-80-20	80	20	70	5.5	8	21.25	258	83	7675	

\* 1 US Ton = 2,000 Lbs



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

## BSLB BASKET SLING LIFTING BEAM


### FEATURES

- This style of lifting beam can be utilized where headroom is limited with slings in a basket hitch.
- Includes two sets of fixed hooks (3' and 4' beams have one set of hooks).
- Two standard lift points for load adjustment; outside lift point and inside lift point (1/2 the outside spread).
- Engineered & manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**



### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Lower headroom bail
- Additional hooks
- Sling spacers
- Horn hooks

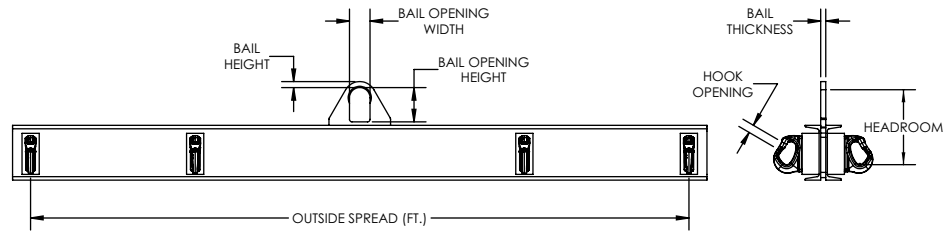

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
BSLB-1/2-3	1/2	3	9	0.88	3	5	0.75	1.06	53
BSLB-1/2-4	1/2	4	9	0.88	3	5	0.75	1.06	68
BSLB-1/2-6	1/2	6	9	0.88	3	5	0.75	1.06	116
BSLB-1/2-8	1/2	8	9	0.88	3	5	0.75	1.06	158
BSLB-1/2-10	1/2	10	10	0.88	3	5	0.75	1.06	210
BSLB-1/2-12	1/2	12	10	0.88	3	5	0.75	1.06	231
BSLB-1/2-14	1/2	14	11	0.88	3	5	0.75	1.06	313
BSLB-1/2-16	1/2	16	11	0.88	3	5	0.75	1.06	348
BSLB-1/2-18	1/2	18	12	0.88	3	5	0.75	1.06	445
BSLB-1/2-20	1/2	20	12	0.88	3	5	0.75	1.06	486
BSLB-1/2-24	1/2	24	13	0.88	3	5	0.75	1.06	658
BSLB-1/2-30	1/2	30	14	0.88	3	5	0.75	1.06	898
BSLB-1-3	1	3	9	0.88	3	5	0.75	1.13	53
BSLB-1-4	1	4	9	0.88	3	5	0.75	1.13	68
BSLB-1-6	1	6	10	0.88	3	5	0.75	1.13	152
BSLB-1-8	1	8	11	0.88	3	5	0.75	1.13	221
BSLB-1-10	1	10	11	0.88	3	5	0.75	1.13	242
BSLB-1-12	1	12	12	0.88	3	5	0.75	1.13	305
BSLB-1-14	1	14	12	0.88	3	5	0.75	1.13	355
BSLB-1-16	1	16	13	0.88	3	5	0.75	1.13	410
BSLB-1-18	1	18	14	0.88	3	5	0.75	1.13	566
BSLB-1-20	1	20	14	0.88	3	5	0.75	1.13	617
BSLB-1-24	1	24	16	0.88	3	5	0.75	1.13	952
BSLB-1-30	1	30	16	0.88	3	5	0.75	1.13	1208

\* 1 US Ton = 2,000 Lbs

cont.



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING BEAMS

## BASKET SLING LIFTING BEAM cont.

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
BSLB-2-3	2	3	10	0.88	3	5	0.75	1.13	74
BSLB-2-4	2	4	11	0.88	3	5	0.75	1.13	95
BSLB-2-6	2	6	11	0.88	3	5	0.75	1.13	168
BSLB-2-8	2	8	12	0.88	3	5	0.75	1.13	236
BSLB-2-10	2	10	13	0.88	3	5	0.75	1.13	315
BSLB-2-12	2	12	14	0.88	3	5	0.75	1.13	394
BSLB-2-14	2	14	14	0.88	3	5	0.75	1.13	469
BSLB-2-16	2	16	15	0.88	3	5	0.75	1.13	541
BSLB-2-18	2	18	16	0.88	3	5	0.75	1.13	761
BSLB-2-20	2	20	16	0.88	3	5	0.75	1.13	856
BSLB-2-24	2	24	18	0.88	3	5	0.75	1.13	1282
BSLB-2-30	2	30	21	0.88	3	5	0.75	1.13	2386
BSLB-5-3	5	3	14	2	4	7	1	1.13	95
BSLB-5-4	5	4	15	2	4	7	1	1.13	168
BSLB-5-6	5	6	16	2	4	7	1	1.13	289
BSLB-5-8	5	8	17	2	4	7	1	1.13	368
BSLB-5-10	5	10	23	2	4	7	1	1.13	473
BSLB-5-12	5	12	23	2	4	7	1	1.13	525
BSLB-5-14	5	14	19	2	4	7	1.25	1.13	897
BSLB-5-16	5	16	20	2	4	7	1.25	1.13	987
BSLB-5-18	5	18	23	2	4	7	1.25	1.13	1468
BSLB-5-20	5	20	23	2	4	7	1.25	1.13	1733
BSLB-5-24	5	24	23	2	4	7	1.25	1.13	2251
BSLB-5-30	5	30	26	2	4	7	1.25	1.13	2447
BSLB-7.5-3	7.5	3	15	2	4	7	1.25	1.75	158
BSLB-7.5-4	7.5	4	16	2	4	7	1.25	1.75	189
BSLB-7.5-6	7.5	6	17	2	4	7	1.25	1.75	336
BSLB-7.5-8	7.5	8	18	2	4	7	1.25	1.75	431
BSLB-7.5-10	7.5	10	18	2	4	7	1.25	1.75	525
BSLB-7.5-12	7.5	12	20	2	4	7	1.25	1.75	735
BSLB-7.5-14	7.5	14	23	2	4	7	1.25	1.75	1204
BSLB-7.5-16	7.5	16	23	2	4	7	1.25	1.75	1364
BSLB-7.5-18	7.5	18	23	2	4	7	1.25	1.75	1541
BSLB-7.5-20	7.5	20	23	2	4	7	1.25	1.75	1686
BSLB-7.5-24	7.5	24	26	2	4	7	1.25	1.75	2452
BSLB-7.5-30	7.5	30	26	2	4	7	1.25	1.75	3021
BSLB-10-3	10	3	16	2	4	7	1.25	1.75	163
BSLB-10-4	10	4	17	2	4	7	1.25	1.75	210
BSLB-10-6	10	6	18	2	4	7	1.25	1.75	347
BSLB-10-8	10	8	20	2	4	7	1.25	1.75	525
BSLB-10-10	10	10	23	2	4	7	1.25	1.75	893
BSLB-10-12	10	12	23	2	4	7	1.25	1.75	1050
BSLB-10-14	10	14	23	2	4	7	1.25	1.75	1220
BSLB-10-16	10	16	23	2	4	7	1.25	1.75	1365
BSLB-10-18	10	18	26	2	4	7	1.25	1.75	1827
BSLB-10-20	10	20	26	2	4	7	1.25	1.75	2040
BSLB-10-24	10	24	26	2	4	7	1.25	1.75	2472
BSLB-10-30	10	30	26	2	4	7	1.25	1.75	3110

\* 1 US Ton = 2,000 Lbs

cont.



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

## BSLB

### BASKET SLING LIFTING BEAM cont.


#### FEATURES

- This style of lifting beam can be utilized where headroom is limited with slings in a basket hitch.
- Includes two sets of fixed hooks (3' and 4' beams have one set of hooks).
- Two standard lift points for load adjustment; outside lift point and inside lift point (1/2 the outside spread).
- Engineered & manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**



#### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Lower headroom bail
- Additional hooks
- Sling spacers

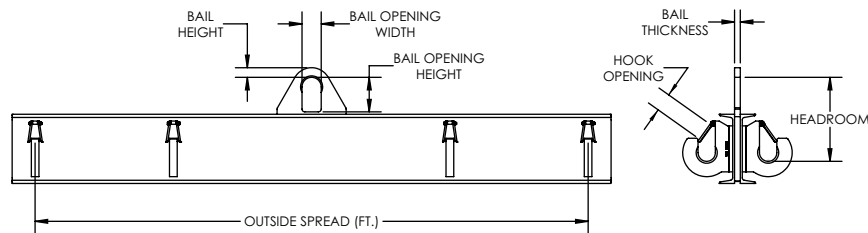

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
BSLB-15-3	15	3	19	2.5	5	9	1.5	4	266
BSLB-15-4	15	4	20	2.5	5	9	1.5	4	344
BSLB-15-6	15	6	22	2.5	5	9	1.5	4	956
BSLB-15-8	15	8	22	2.5	5	9	1.5	4	1050
BSLB-15-10	15	10	25	2.5	5	9	1.5	4	1208
BSLB-15-12	15	12	28	2.5	5	9	1.5	4	1827
BSLB-15-14	15	14	28	2.5	5	9	1.5	4	2032
BSLB-15-16	15	16	28	2.5	5	9	1.5	4	2205
BSLB-15-18	15	18	28	2.5	5	9	1.5	4	2511
BSLB-15-20	15	20	28	2.5	5	9	1.5	4	2713
BSLB-15-24	15	24	28	2.5	5	9	1.5	4	3675
BSLB-15-30	15	30	30	2.5	5	9	1.5	4	4305
BSLB-20-3	20	3	20	2.5	5	9	1.5	4	417
BSLB-20-4	20	4	22	2.5	5	9	1.5	4	495
BSLB-20-6	20	6	22	2.5	5	9	1.5	4	1019
BSLB-20-8	20	8	25	2.5	5	9	1.5	4	1302
BSLB-20-10	20	10	25	2.5	5	9	1.5	4	1319
BSLB-20-12	20	12	25	2.5	5	9	1.5	4	2079
BSLB-20-14	20	14	28	2.5	5	9	1.5	4	2168
BSLB-20-16	20	16	28	2.5	5	9	1.5	4	2321
BSLB-20-18	20	18	28	2.5	5	9	1.5	4	2604
BSLB-20-20	20	20	28	2.5	5	9	1.5	4	2893
BSLB-20-24	20	24	31	2.5	5	9	1.5	4	4247
BSLB-20-30	20	30	31	2.5	5	9	1.5	4	4725

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING BEAMS



## DCLB DUAL CRANE LIFTING BEAM

### FEATURES

- This style of lifting beam is utilized with two cranes, where headroom is limited, and comes with a swivel hook.
- Roller bearing, which rotates under load, is standard on capacities 30 tons and over.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Center bail
- Additional hooks
- Integrated beam stands

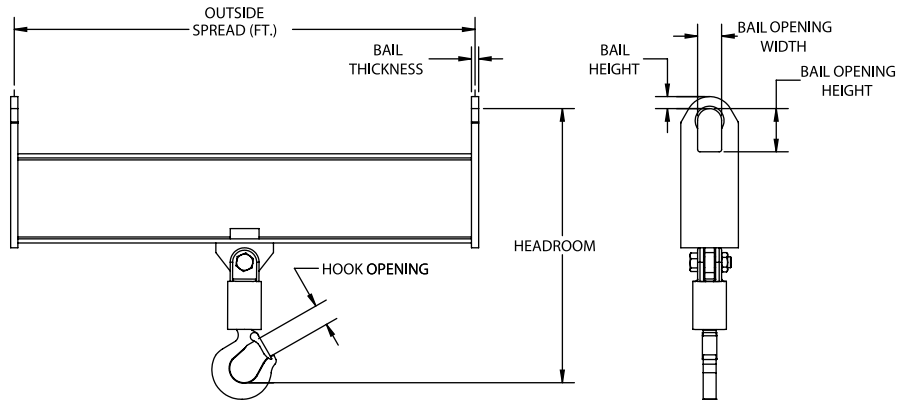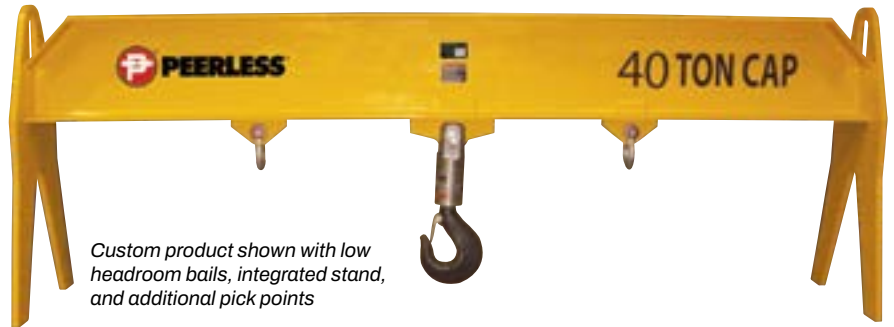

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
DCLB-2-6	2	6	17	1.5	3	5	0.63	1.09	125
DCLB-2-8	2	8	17	1.5	3	5	0.63	1.09	160
DCLB-2-10	2	10	18	1.5	3	5	0.63	1.09	240
DCLB-2-12	2	12	18	1.5	3	5	0.63	1.09	280
DCLB-2-14	2	14	19	1.5	3	5	0.63	1.09	360
DCLB-2-16	2	16	19	1.5	3	5	0.63	1.09	400
DCLB-2-18	2	18	19	1.5	3	5	0.63	1.09	530
DCLB-2-20	2	20	19	1.5	3	5	0.63	1.09	660
DCLB-2-24	2	24	20	1.5	3	5	0.63	1.09	790
DCLB-4-6	4	6	20	1.5	3	5	0.63	1.61	160
DCLB-4-8	4	8	21	1.5	3	5	0.63	1.61	240
DCLB-4-10	4	10	22	1.5	3	5	0.63	1.61	310
DCLB-4-12	4	12	23	1.5	3	5	0.63	1.61	410
DCLB-4-14	4	14	23	1.5	3	5	0.63	1.61	500
DCLB-4-16	4	16	25	1.5	3	5	0.63	1.61	725
DCLB-4-18	4	18	25	1.5	3	5	0.63	1.61	805
DCLB-4-20	4	20	25	1.5	3	5	0.63	1.61	890
DCLB-4-24	4	24	26	1.5	3	5	0.63	1.61	1695
DCLB-6-6	6	6	28	1.5	3	5	0.75	2.08	220
DCLB-6-8	6	8	29	1.5	3	5	0.75	2.08	300
DCLB-6-10	6	10	29	1.5	3	5	0.75	2.08	380
DCLB-6-12	6	12	31	1.5	3	5	0.75	2.08	550
DCLB-6-14	6	14	31	1.5	3	5	0.75	2.08	640
DCLB-6-16	6	16	31	1.5	3	5	0.75	2.08	780
DCLB-6-18	6	18	31	1.5	3	5	0.75	2.08	1310
DCLB-6-20	6	20	31	1.5	3	5	0.75	2.08	1450
DCLB-6-24	6	24	32	1.5	3	5	0.75	2.08	1735

\* 1 US Ton = 2,000 Lbs

cont.



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT




## DUAL CRANE LIFTING BEAM cont.

### FEATURES


- This style of lifting beam is utilized with two cranes, where headroom is limited, and comes with a swivel hook.
- Roller bearing, which rotates under load, is standard on capacities 30 tons and over.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Center bail
- Additional hooks
- Integrated beam stands

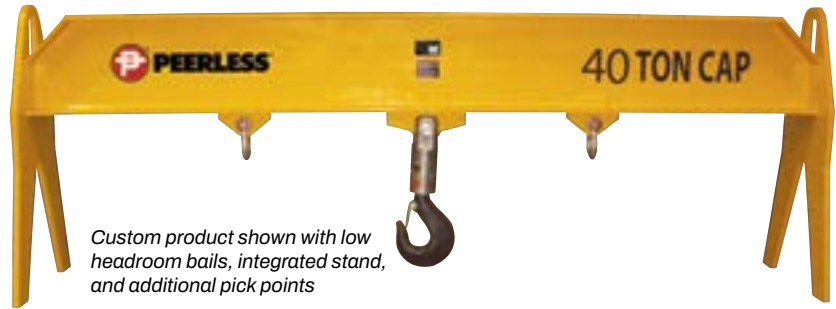

Custom product shown with low headroom bails, integrated stand, and additional pick points

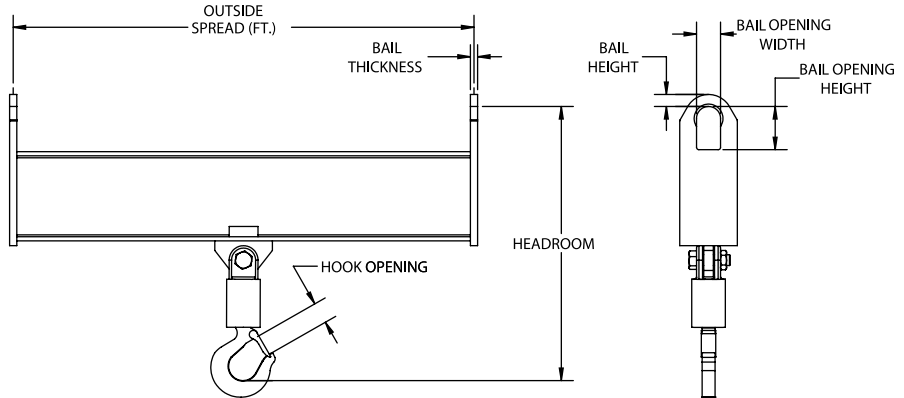

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)						Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
DCLB-10-6	10	6	29	2	4	7	1	2.27	340
DCLB-10-8	10	8	29	2	4	7	1	2.27	420
DCLB-10-10	10	10	32	2	4	7	1	2.27	800
DCLB-10-12	10	12	32	2	4	7	1	2.27	920
DCLB-10-14	10	14	32	2	4	7	1	2.27	1100
DCLB-10-16	10	16	32	2	4	7	1	2.27	1220
DCLB-10-18	10	18	32	2	4	7	1	2.27	1705
DCLB-10-20	10	20	32	2	4	7	1	2.27	1840
DCLB-10-24	10	24	33	2	4	7	1	2.27	2230
DCLB-15-8	15	8	38	2	4	7	1.25	3.02	814
DCLB-15-10	15	10	38	2	4	7	1.25	3.02	952
DCLB-15-12	15	12	38	2	4	7	1.25	3.02	1155
DCLB-15-14	15	14	41	2	4	7	1.25	3.02	2123
DCLB-15-16	15	16	41	2	4	7	1.25	3.02	2374
DCLB-15-18	15	18	42	2	4	7	1.25	3.02	2519
DCLB-15-20	15	20	42	2	4	7	1.25	3.02	2750
DCLB-15-24	15	24	42	2	4	7	1.25	3.02	2860
DCLB-20-8	20	8	36	2	4	7	1.25	3.02	913
DCLB-20-10	20	10	39	2	4	7	1.25	3.02	1243
DCLB-20-12	20	12	39	2	4	7	1.25	3.02	1393
DCLB-20-14	20	14	39	2	4	7	1.25	3.02	2119
DCLB-20-16	20	16	39	2	4	7	1.25	3.02	2416
DCLB-20-18	20	18	39	2	4	7	1.25	3.02	2673
DCLB-20-20	20	20	39	2	4	7	1.25	3.02	2783
DCLB-30-8	30	8	54	2.5	5	9	1.5	3.75	1232
DCLB-30-10	30	10	54	2.5	5	9	1.5	3.75	1458
DCLB-30-12	30	12	54	2.5	5	9	1.5	3.75	1771
DCLB-40-8	40	8	59	2.5	5	9	1.5	4.25	1282
DCLB-40-10	40	10	59	2.5	5	9	1.5	4.25	1617
DCLB-40-12	40	12	59	2.5	5	9	1.5	4.25	1870

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.





**PEERLESS  
QUICKSHIP**


Products eligible for Quick Ship display a QS icon.

# UNVB

## UNIVERSAL LIFTING/SPREADER BEAM

### FEATURES

- This style of universal beam can be utilized as a lifting beam where headroom is limited or a spreader beam where extra stability is required.
- As a lifting beam, the upper lift point can be easily adjusted to lift an off center load.
- Can be configured as an optional three or four point lifting system.
- Can be supplied with optional chain top rigging.
- Supplied with one upper shackle for adjustable bail positions and two lower shackles for adjustable spreads.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

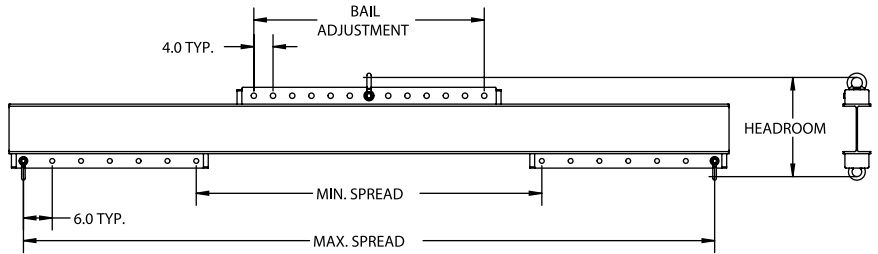

### OPTIONS

- Chain top rigging
- Three point lifting system
- Four point lifting system
- Additional lift points and spreads
- Higher capacities
- Additional lengths
- Swivel hooks



Two Point Lifting Beam



Three Point Lifting System



Four Point Lifting System

Model #	Capacity (US Tons)*	Max. Spread (Ft.)	Min. Spread (Ft.)	Dimensions (Inches)				Weight (Lbs.)
				Bail Adjustment	Headroom	Top Shackle (Tons)	Bottom Shackle (Tons)	
UNVB-1/4-4	1/4	4	1	16	8	1.5	1.5	45
UNVB-1/2-4	1/2	4	1	16	8	1.5	1.5	45
UNVB-1/2-6	1/2	6	3	24	10	1.5	1.5	80
UNVB-1/2-8	1/2	8	4	32	11	1.5	1.5	135
UNVB-1/2-10	1/2	10	5	40	11	1.5	1.5	145
UNVB-1-6	1	6	3	24	11	1.5	1.5	100
UNVB-1-8	1	8	4	32	12	1.5	1.5	140
UNVB-1-10	1	10	5	40	12	1.5	1.5	175
UNVB-2-6	2	6	3	24	14	3.25	2	130
UNVB-2-8	2	8	4	32	15	3.25	2	200
UNVB-2-10	2	10	5	40	16	3.25	2	280
UNVB-4-8	4	8	4	32	18	4.75	4.75	290
UNVB-4-10	4	10	5	40	20	4.75	4.75	420
UNVB-4-12	4	12	6	48	20	4.75	4.75	500
UNVB-5-8	5	8	4	32	20	6.5	4.75	320
UNVB-5-10	5	10	5	40	21	6.5	4.75	465
UNVB-5-12	5	12	6	48	21	6.5	4.75	550
UNVB-7-12	7	12	6	48	25	6.5	6.5	790

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

LIFTING BEAMS




**QS** Products eligible for Quick Ship display a QS icon.



## ADJUSTABLE LIFTING BEAM



### FEATURES

- This style of lifting beam can lift off center loads easily by adjusting the bail prior to the lift.
- This lifter can be used where headroom is limited, & comes with multiple spreads that are adjustable to accommodate various load sizes at 6" adjustable increments.
- Supplied with two lower shackles.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied a No Additional Charge.**

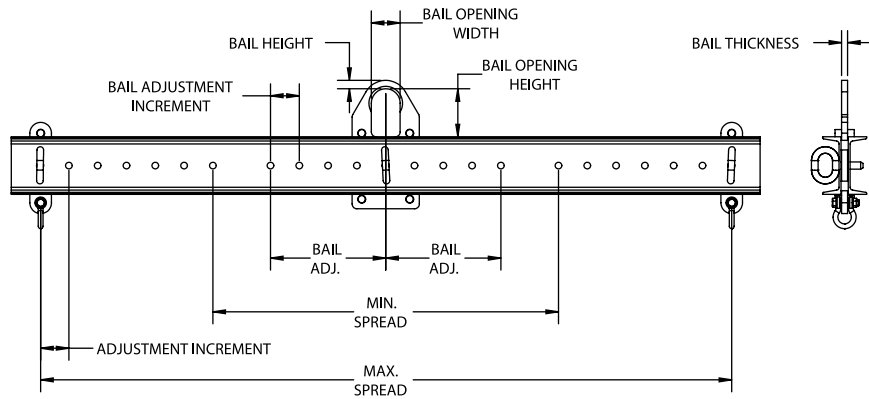

### OPTIONS

- Swivel hooks

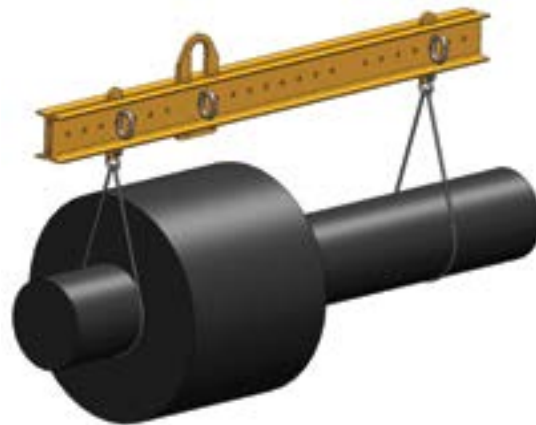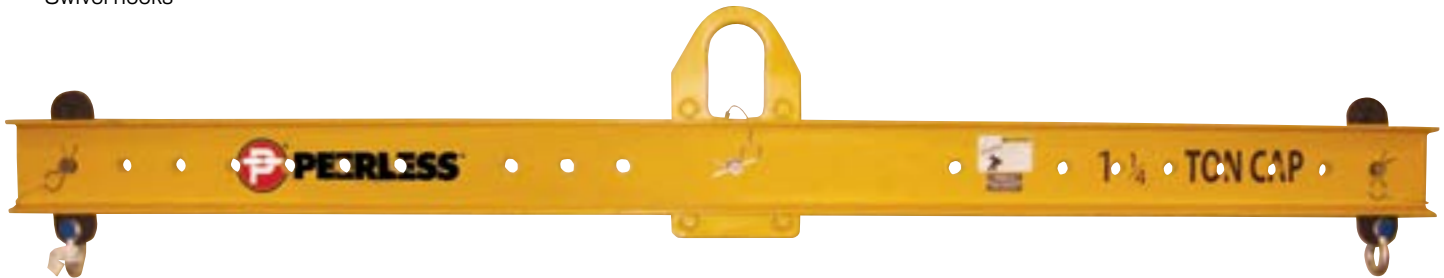

Model #	Capacity (US Tons)*	Max. Spread (Ft.)	Min. Spread (Ft.)	Dimensions (Inches)								Weight (Lbs.)
				Head-room	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Bail Adjustment Increments	Bail Travel (Half of Center)	Shackle Size (Tons)	
<b>QS</b> ALB-1.25-6	1.25	6	3	13.5	1	3	5	0.63	3	12	2	120
<b>QS</b> ALB-2-6	2	6	3	14.5	1	3	5	0.63	3	12	2	140
<b>QS</b> ALB-4-8	4	8	4.5	20	1.5	4	7	0.75	6	18	3.25	315
<b>QS</b> ALB-5-10	5	10	5	22	1.5	4	7	1	6	18	4.75	440

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.





## ADJUSTABLE BAIL LIFTING BEAM

### FEATURES

- This style of lifting beam can lift off center loads easily by adjusting the bail prior to the lift.
- This lifter can be used where headroom is limited, and comes standard with one outside lift point and two swivel hooks (additional spreads and swivel hooks are available).
- Engineered & manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Lower headroom bail
- Additional hooks
- Additional load pins
- Integrated beam stands

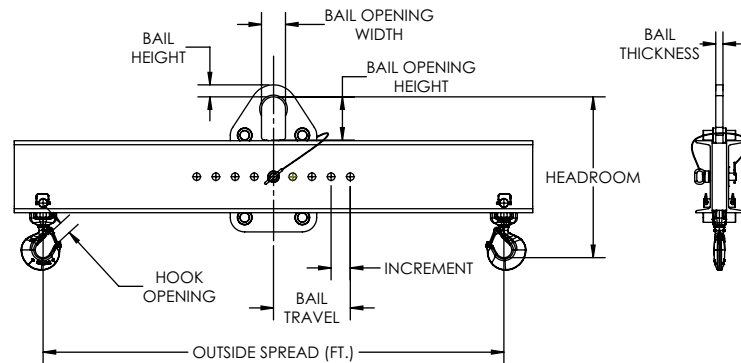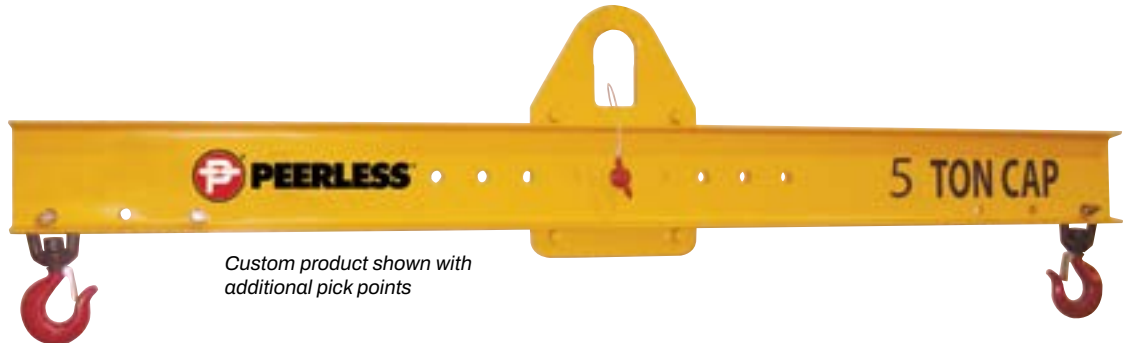

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)								Weight (Lbs.)
			Head-room	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	Bail Adjustment Increments	Bail Travel (Half of Center)	
ABLB-1/2-3	1/2	3	14	1.5	3	5	0.63	1	3	6	52
ABLB-1/2-4	1/2	4	14	1.5	3	5	0.63	1	3	9	62
ABLB-1/2-6	1/2	6	14	1.5	3	5	0.63	1	3	12	83
ABLB-1/2-8	1/2	8	14	1.5	3	5	0.63	1	4	16	90
ABLB-1/2-10	1/2	10	14	1.5	3	5	0.63	1	4	20	105
ABLB-1/2-12	1/2	12	14	1.5	3	5	0.63	1	4	24	162
ABLB-1/2-14	1/2	14	14	1.5	3	5	0.63	1	6	30	185
ABLB-1/2-16	1/2	16	15	1.5	3	5	0.63	1	6	36	281
ABLB-1/2-18	1/2	18	15	1.5	3	5	0.63	1	6	42	306
ABLB-1/2-20	1/2	20	15	1.5	3	5	0.63	1	6	48	334
ABLB-1-3	1	3	14	1.5	3	5	0.63	1	3	6	52
ABLB-1-4	1	4	14	1.5	3	5	0.63	1	3	9	62
ABLB-1-6	1	6	14	1.5	3	5	0.63	1	3	12	91
ABLB-1-8	1	8	15	1.5	3	5	0.63	1	4	16	139
ABLB-1-10	1	10	15	1.5	3	5	0.63	1	4	20	187
ABLB-1-12	1	12	15	1.5	3	5	0.63	1	4	24	218
ABLB-1-14	1	14	16	1.5	3	5	0.63	1	6	30	295

\* 1 US Ton = 2,000 Lbs

cont.



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT




## ADJUSTABLE BAIL LIFTING BEAM cont.

### FEATURES


- This style of lifting beam can lift off center loads easily by adjusting the bail prior to the lift.
- This lifter can be used where headroom is limited, and comes standard with one outside lift point and two swivel hooks (additional spreads and swivel hooks are available).
- Engineered & manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Lower headroom bail
- Additional hooks
- Additional load pins
- Integrated beam stands

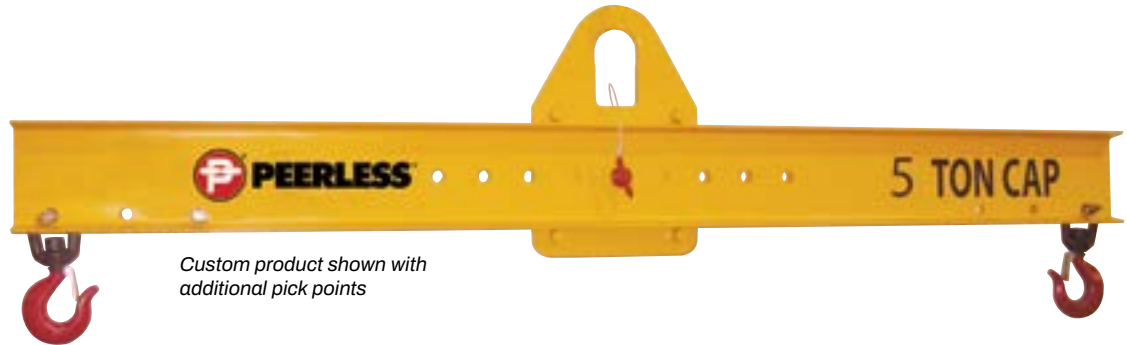


Custom product shown with additional pick points

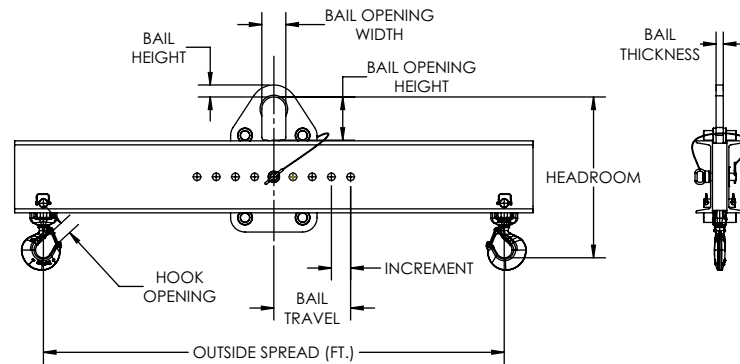

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)								Weight (Lbs.)
			Head-room	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	Bail Adjustment Increments	Bail Travel (Half of Center)	
ABLB-1-16	1	16	16	1.5	3	5	0.63	1	6	36	328
ABLB-1-18	1	18	17	1.5	3	5	0.63	1	6	42	450
ABLB-1-20	1	20	17	1.5	3	5	0.63	1	6	48	494
ABLB-2-3	2	3	14	1.5	3	5	0.75	1	3	6	53
ABLB-2-4	2	4	15	1.5	3	5	0.75	1	3	9	98
ABLB-2-6	2	6	15	1.5	3	5	0.75	1	3	12	129
ABLB-2-8	2	8	16	1.5	3	5	0.75	1	4	16	187
ABLB-2-10	2	10	19	1.5	3	5	0.75	1	4	20	264
ABLB-2-12	2	12	17	1.5	3	5	0.75	1	4	24	306
ABLB-2-14	2	14	18	1.5	3	5	0.75	1	6	30	406
ABLB-2-16	2	16	18	1.5	3	5	0.75	1	6	36	458
ABLB-2-18	2	18	20	1.5	3	5	0.75	1	6	42	602
ABLB-2-20	2	20	20	1.5	3	5	0.75	1	6	48	666
ABLB-5-3	5	3	22	2	4	7	1	1.36	3	6	154
ABLB-5-4	5	4	22	2	4	7	1	1.36	3	9	176
ABLB-5-6	5	6	22	2	4	7	1	1.36	3	12	237
ABLB-5-8	5	8	23	2	4	7	1	1.36	4	16	334

\* 1 US Ton = 2,000 Lbs

cont.



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

## ADJUSTABLE BAIL LIFTING BEAM cont.

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)								Weight (Lbs.)
			Head-room	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	Bail Adjustment Increments	Bail Travel (Half of Center)	
ABLB-5-10	5	10	24	2	4	7	1	1.36	4	20	473
ABLB-5-12	5	12	27	2	4	7	1	1.36	4	24	696
ABLB-5-14	5	14	27	2	4	7	1	1.36	6	30	730
ABLB-5-16	5	16	28	2	4	7	1	1.36	6	36	821
ABLB-5-18	5	18	29	2	4	7	1	1.36	6	42	1453
ABLB-5-20	5	20	30	2	4	7	1	1.36	6	48	1678
ABLB-10-3	10	3	26	2	4	7	1.25	2.08	3	6	231
ABLB-10-4	10	4	26	2	4	7	1.25	2.08	3	9	232
ABLB-10-6	10	6	29	2	4	7	1.25	2.08	3	12	475
ABLB-10-8	10	8	29	2	4	7	1.25	2.08	4	16	574
ABLB-10-10	10	10	32	2	4	7	1.25	2.08	4	20	835
ABLB-10-12	10	12	32	2	4	7	1.25	2.08	4	24	1092
ABLB-10-14	10	14	32	2	4	7	1.25	2.08	6	30	1241
ABLB-10-16	10	16	32	2	4	7	1.25	2.08	6	36	1383
ABLB-10-18	10	18	35	2	4	7	1.25	2.08	6	42	1679
ABLB-10-20	10	20	35	2	4	7	1.25	2.08	6	48	1744
ABLB-15-3	15	3	28	2.5	5	9	1.5	2.27	3	6	277
ABLB-15-4	15	4	31	2.5	5	9	1.5	2.27	3	9	363
ABLB-15-6	15	6	34	2.5	5	9	1.5	2.27	3	12	552
ABLB-15-8	15	8	34	2.5	5	9	1.5	2.27	4	16	596
ABLB-15-10	15	10	34	2.5	5	9	1.5	2.27	4	20	970
ABLB-15-12	15	12	37	2.5	5	9	1.5	2.27	4	24	1486
ABLB-15-14	15	14	37	2.5	5	9	1.5	2.27	6	30	1540
ABLB-15-16	15	16	37	2.5	5	9	1.5	2.27	6	36	1623
ABLB-15-18	15	18	37	2.5	5	9	1.5	2.27	6	42	1912
ABLB-15-20	15	20	37	2.5	5	9	1.5	2.27	6	48	2099
ABLB-20-3	20	3	31	2.5	5	9	1.5	2.27	3	6	347
ABLB-20-4	20	4	34	2.5	5	9	1.5	2.27	3	9	439
ABLB-20-6	20	6	37	2.5	5	9	1.5	2.27	3	12	809
ABLB-20-8	20	8	37	2.5	5	9	1.5	2.27	4	16	792
ABLB-20-10	20	10	37	2.5	5	9	1.5	2.27	4	20	1404
ABLB-20-12	20	12	37	2.5	5	9	1.5	2.27	4	24	1601
ABLB-20-14	20	14	37	2.5	5	9	1.5	2.27	6	30	1793
ABLB-20-16	20	16	37	2.5	5	9	1.5	2.27	6	36	1980
ABLB-20-18	20	18	37	2.5	5	9	1.5	2.27	6	42	2063
ABLB-20-20	20	20	37	2.5	5	9	1.5	2.27	6	48	2129

\* 1 US Ton = 2,000 Lbs

## PEERLESS PRODUCT ADVANTAGES

EVERY STANDARD PRODUCT HAS THE MOST UP-TO-DATE  
INDUSTRY LEADING FEATURES



Machined Bails



Parent Metal Design



Heavy Duty Drives





**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT




## LOAD LEVELING BEAM

### FEATURES

- This style of lifting beam can lift off center loads easily by adjusting the bail with the standard chain wheel prior to the lift and has unlimited adjustment within the span of the bail.
- This lifter can be used where headroom is limited, and comes standard with one outside spread and two swivel hooks (additional spreads and swivel hooks are available).
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional lift points
- Higher capacities
- Additional lengths
- Lower headroom bail
- Additional hooks
- Additional load pins

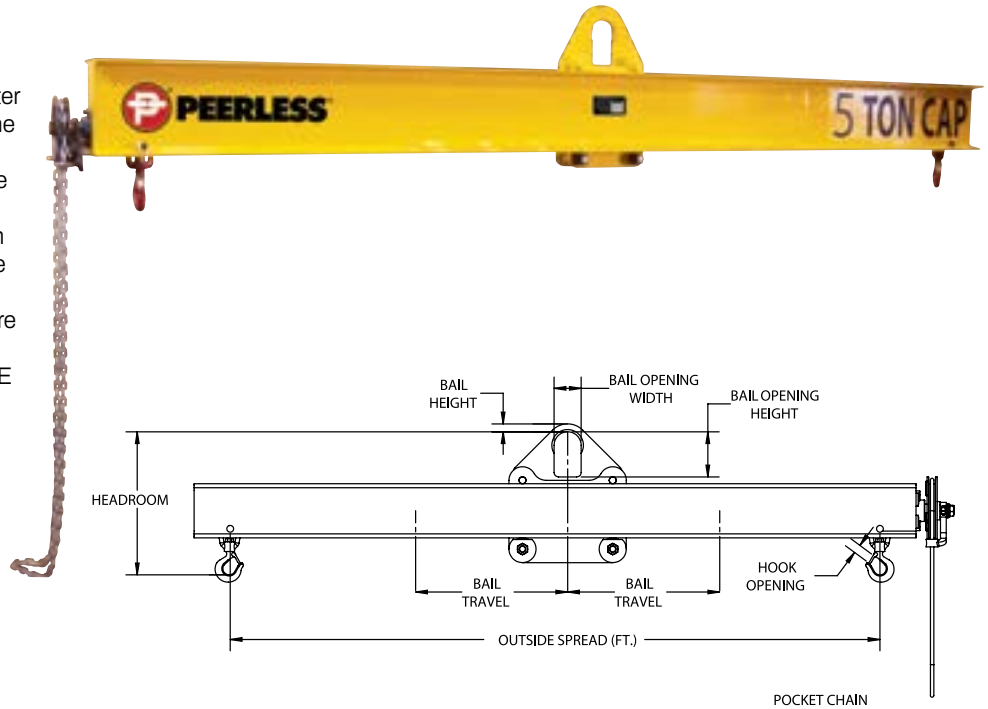

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)							Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	Bail Travel (Half of Center)	
LLB-2-4	2	4	16	1.5	3	5	0.63	1	8	169
LLB-2-6	2	6	16	1.5	3	5	0.63	1	12	231
LLB-2-8	2	8	17	1.5	3	5	0.63	1	16	325
LLB-2-10	2	10	18	1.5	3	5	0.63	1	20	411
LLB-2-12	2	12	18	1.5	3	5	0.63	1	24	471
LLB-2-14	2	14	19	1.5	3	5	0.63	1	28	601
LLB-2-16	2	16	19	1.5	3	5	0.63	1	32	673
LLB-2-18	2	18	20	1.5	3	5	0.63	1	36	850
LLB-2-20	2	20	20	1.5	3	5	0.63	1	40	938
LLB-2-24	2	24	21	1.5	3	5	0.63	1	48	1581
LLB-5-4	5	4	23	2	4	7	1	1.36	8	213
LLB-5-6	5	6	23	2	4	7	1	1.36	12	338
LLB-5-8	5	8	25	2	4	7	1	1.36	16	478
LLB-5-10	5	10	25	2	4	7	1	1.36	20	594
LLB-5-12	5	12	27	2	4	7	1	1.36	24	851
LLB-5-14	5	14	27	2	4	7	1	1.36	28	971
LLB-5-16	5	16	27	2	4	7	1	1.36	32	1188
LLB-5-18	5	18	30	2	4	7	1	1.36	36	1819
LLB-5-20	5	20	30	2	4	7	1	1.36	40	2004
LLB-5-24	5	24	30	2	4	7	1	1.36	48	2931
LLB-10-4	10	4	27	2	4	7	1.25	2.08	8	321
LLB-10-6	10	6	30	2	4	7	1.25	2.08	12	550
LLB-10-8	10	8	30	2	4	7	1.25	2.08	16	625
LLB-10-10	10	10	33	2	4	7	1.25	2.08	20	1175
LLB-10-12	10	12	33	2	4	7	1.25	2.08	24	1368

\* 1 US Ton = 2,000 Lbs

cont.



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING BEAMS

## LOAD LEVELING BEAM cont.

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)							Weight (Lbs.)
			Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	Bail Travel (Half of Center)	
LLB-10-14	10	14	33	2	4	7	1.25	2.08	28	1554
LLB-10-16	10	16	33	2	4	7	1.25	2.08	32	1735
LLB-10-18	10	18	36	2	4	7	1.25	2.08	36	2344
LLB-10-20	10	20	36	2	4	7	1.25	2.08	40	2406
LLB-10-24	10	24	36	2	4	7	1.25	2.08	48	3063
LLB-15-4	15	4	32	2.5	5	9	1.5	2.27	8	470
LLB-15-6	15	6	35	2.5	5	9	1.5	2.27	12	706
LLB-15-8	15	8	35	2.5	5	9	1.5	2.27	16	778
LLB-15-10	15	10	35	2.5	5	9	1.5	2.27	20	1215
LLB-15-12	15	12	38	2.5	5	9	1.5	2.27	24	1649
LLB-15-14	15	14	38	2.5	5	9	1.5	2.27	28	1773
LLB-15-16	15	16	38	2.5	5	9	1.5	2.27	32	1891
LLB-15-18	15	18	38	2.5	5	9	1.5	2.27	36	2375
LLB-15-20	15	20	38	2.5	5	9	1.5	2.27	40	2570
LLB-15-24	15	24	38	2.5	5	9	1.5	2.27	48	3200
LLB-20-4	20	4	35	2.5	5	9	1.5	2.27	8	556
LLB-20-6	20	6	38	2.5	5	9	1.5	2.27	12	998
LLB-20-8	20	8	38	2.5	5	9	1.5	2.27	16	1125
LLB-20-10	20	10	38	2.5	5	9	1.5	2.27	20	1313
LLB-20-12	20	12	38	2.5	5	9	1.5	2.27	24	2813
LLB-20-14	20	14	38	2.5	5	9	1.5	2.27	28	2938
LLB-20-16	20	16	38	2.5	5	9	1.5	2.27	32	3063
LLB-20-18	20	18	38	2.5	5	9	1.5	2.27	36	3688
LLB-20-20	20	20	38	2.5	5	9	1.5	2.27	40	3938
LLB-20-24	20	24	38	2.5	5	9	1.5	2.27	48	4188

\* 1 US Ton = 2,000 Lbs



**WARNING**

DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

## TPLB


### THREE POINT LIFTING BEAM

#### FEATURES

- This style of lifting beam can be utilized where headroom is limited and when lifting objects that require multiple lift points.
- Designed to meet your specific lifting requirements.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**


#### OPTIONS

- Multiple lift points
- Dual bails
- Lower headroom bail
- Adjustable spread
- Adjustable bail
- Swivel hooks
- Shackle lugs
- Additional load pins
- Beam stand

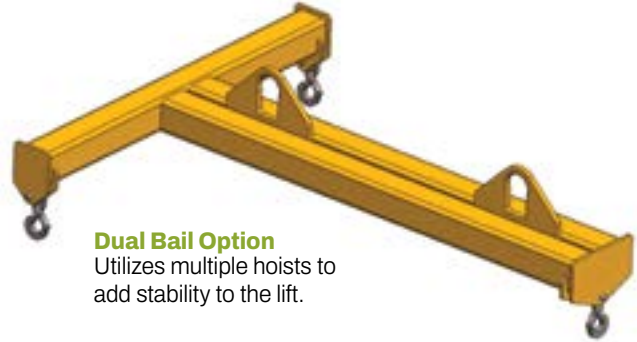


#### Dual Bail Option

Utilizes multiple hoists to add stability to the lift.

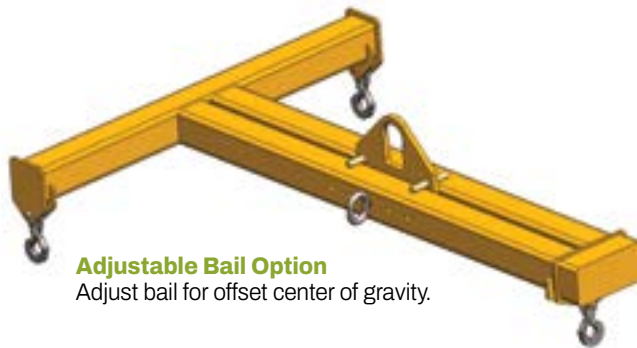

#### Adjustable Bail Option

Adjust bail for offset center of gravity.

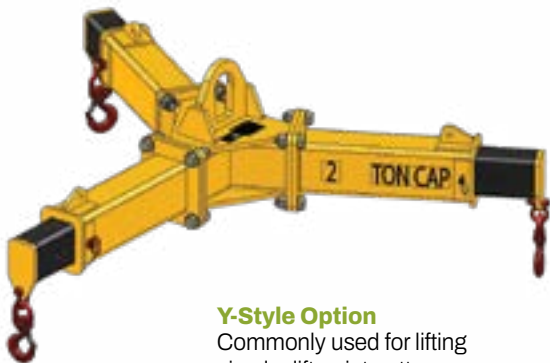

#### Y-Style Option

Commonly used for lifting circular lift point patterns.



#### Adjustable Lift Points Option

Adjust lower lift points for different load lengths/widths.





## FOUR POINT LIFTING BEAM

### FEATURES

- This style of lifting beam can be utilized where headroom is limited and when lifting objects that require multiple lift points.
- Designed to meet your specific lifting requirements.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Multiple lift points
- Dual bails
- Lower headroom bail
- Adjustable spread
- Adjustable bail
- Swivel hooks
- Drop chains
- Shackle lugs
- Beam stand



#### Adjustable Bail Option

Adjust bail for offset center of gravity.



#### Dual Bail Option

Utilizes multiple hoists to add stability to the lift.



#### Adjustable Lift Points Option

Adjust lower lift points for different load lengths/widths.



#### X-Style Option

Typically used for circular pick point patterns.



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

LIFTING BEAMS



## FOUR POINT SACK LIFTER BEAM



**PEERLESS  
QUICK SHIP**



**QS** Products eligible for Quick Ship display a QS icon.

### FEATURES

- This style of lifting beam is designed to lift bulk container sacks.
- Standard Sling Keeper design provides improved sling containment during the lift.
- Low headroom design that meets metric rating requirements.
- Smooth edge design to minimize wear on lifting straps.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Sling spacers
- Low to negative headroom designs
- Additional sizes and styles are available

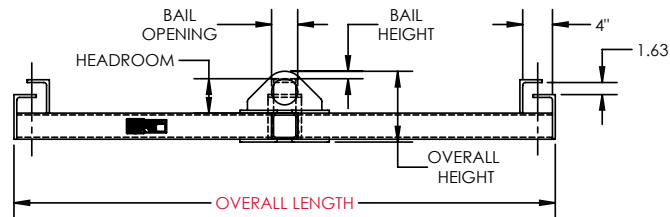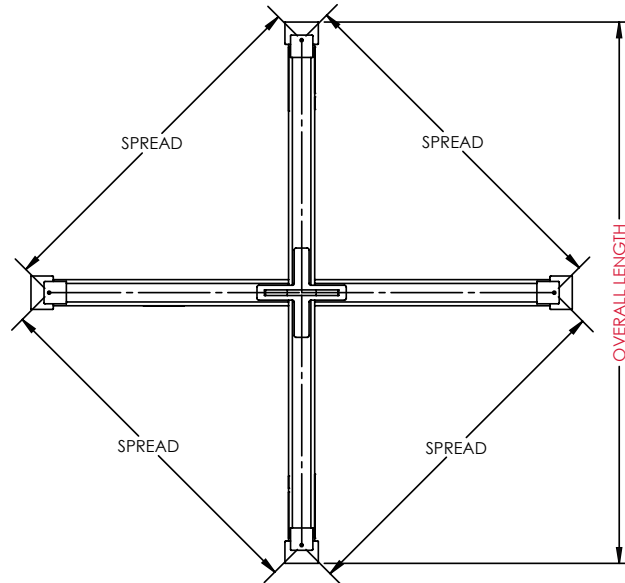

Model #	Capacity (Metric Tons)	Dimensions (Inches)					Overall Length	Weight (Lbs.)
		Outside Spread	Headroom	Bail Height	Bail Opening	Overall Height		
<b>QS</b> FPSL-1-36SK	1	36	4.63	1	3.5	9	55.75	120
<b>QS</b> FPSL-1-48SK	1	48	4.63	1	3.5	9	72.75	145
<b>QS</b> FPSL-2-36SK	2	36	4.63	1	3.5	9.5	55.75	140
<b>QS</b> FPSL-2-48SK	2	48	4.63	1	3.5	9.5	72.75	170



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.




## FOUR POINT ADJUSTABLE BEAM

### FEATURES

- This standard four point adjustable bail and spread style of lifting beam can be utilized where headroom is limited and when lifting objects that require multiple lift points.
- Supplied with four swivel hooks.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Beam stand
- Additional sizes and options are available

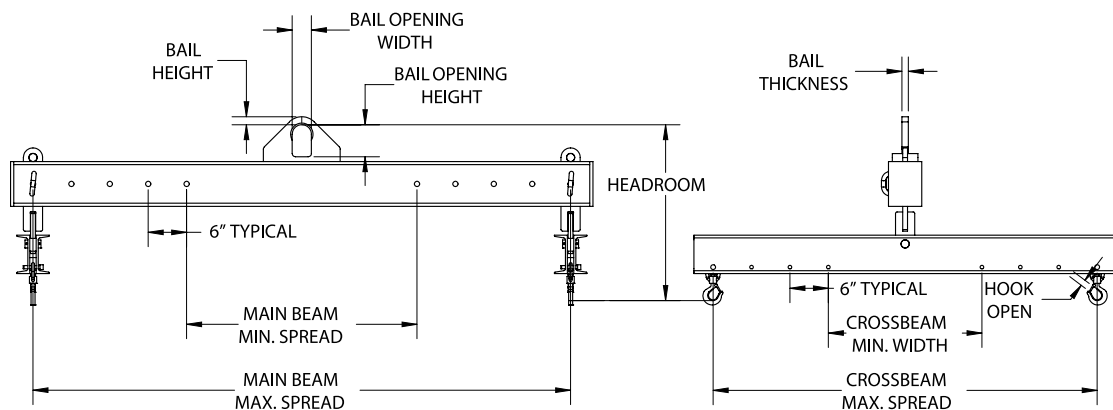

Model #	Capacity (US Tons)*	Main Beam Min/Max Spread	Cross Beam Min/Max Spread	Dimensions (Inches)						Weight (Lbs.)
				Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Hook Opening	
FPAB-3-84/60	3	36/84	24/60	28	1.25	3	5	1	0.91	473
FPAB-5-120/96	5	48/120	36/96	33	2	4	7	1.25	1	958
FPAB-10-144/96	10	72/144	36/96	42	2	4	7	1.25	1.36	1928

\* 1 US Ton = 2,000 Lbs



**WARNING**

DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

## DCRB

### DUAL CRANE ROTATING BEAM

#### FEATURES

- This style of lifting beam is designed to be utilized with dual hoists and can rotate the load parallel.
- Designed to meet your specific lifting requirements.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**


#### OPTIONS

- Dual hooks
- Low headroom bail
- Swivel hooks
- Shackle lugs
- Load pins
- Beam stand



#### Dual Hooks Option

Utilizes dual hooks for lifting slings in a basket hitch configuration.

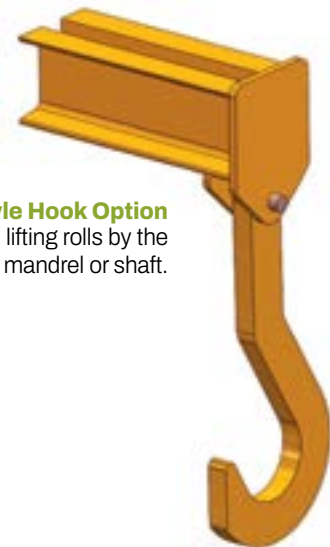

#### Plate Style Hook Option

Utilized when lifting rolls by the mandrel or shaft.



**PEERLESS**  
QUICK SHIP

**QS** Products eligible for Quick Ship display a QS icon.

## CGCLB


### CHLORINE GAS CYLINDER LIFTING BEAM

#### FEATURES


- This style of lifting beam is designed to lift chlorine gas cylinders.
- Low headroom design.
- Smooth edge design to minimize wear on lifting straps.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

#### OPTIONS

- Fork lift pockets available

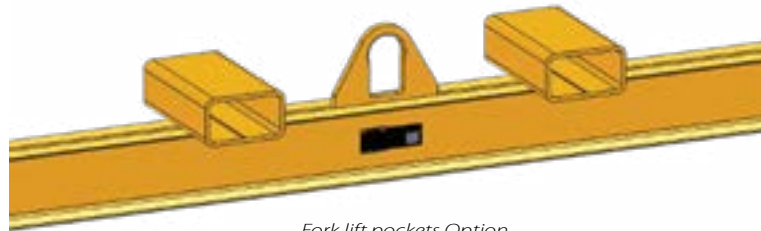

Fork lift pockets Option

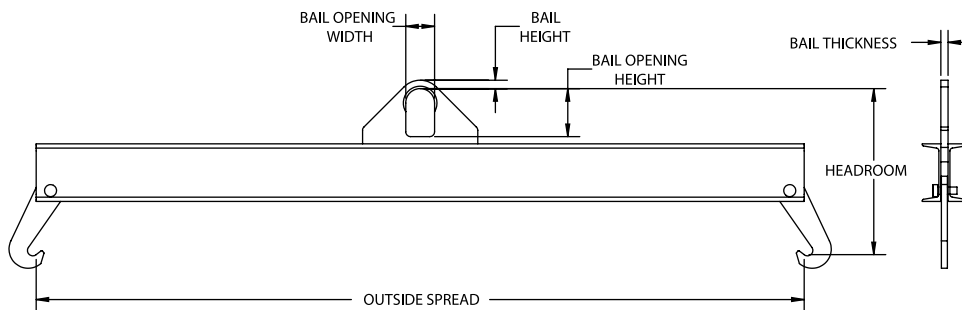

Model #	Capacity (US Tons)*	Dimensions (Inches)						Weight (Lbs.)
		Outside Spread	Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
<b>QS</b> CGCLB-2-80/82	2	80.75 - 82.25	18.5 - 17.5	0.88	3	5	0.75	125

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING BEAMS

Custom Application Form



For pricing information: Fax completed form & contact info to (800)-356-1149

## LOAD INFORMATION:

Describe the material you are planning to lift: \_\_\_\_\_

Lifting Beam Stand Required:  Yes  No

Total Number of Lifting Points: \_\_\_\_\_ Spacing Between Points \_\_\_\_\_

Is The CG (center of gravity) Of The Load Between Outer Lifting Points:  
 Yes  No If No, Describe CG Location \_\_\_\_\_

Type Of Rigging Used To Attach To Load: Swivel Hooks  Shackles   
 Slings (specific type) \_\_\_\_\_ Other (specific type) \_\_\_\_\_

Load Dimensions:

	Min (in)	Max (in)
Height		
Width		
Length		
Weight		

## CRANE SPECIFICATIONS:

Crane Configuration: Single  Double

Distance Between Top Of The Load To The Crane Hook High Position(s): \_\_\_\_\_

Capacity Of The Crane(s): \_\_\_\_\_ Distance Between Cranes (if applicable): \_\_\_\_\_

Required Duty Cycle Of The Lifting Beam: Lifts Per Hour \_\_\_\_\_ Lifts Per Day \_\_\_\_\_

Crane Classification(s):  A  B  C  D  E  F


## DUAL CRANE ROTATING BEAM APPLICATION:

Operation:  Manual  Motorized:  AC  DC Voltage \_\_\_\_\_ Phase \_\_\_\_\_ Cycle \_\_\_\_\_

Controls Required:  Yes  No If Yes: Specify Type \_\_\_\_\_  Furnish Loose  Mounted On Lifter

## CRANE HOOK SPECIFICATIONS (Inches) :

A: \_\_\_ B: \_\_\_ C: \_\_\_ D: \_\_\_ E: \_\_\_ F: \_\_\_ G: \_\_\_ H: \_\_\_

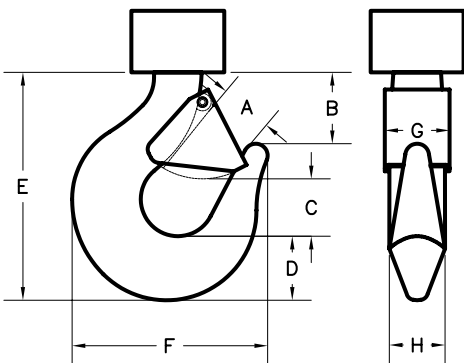

Please provide pertinent application information not supplied above (*extreme product or operating temperature, extreme environmental conditions such as temperature or moisture, space or headroom restrictions, additional specifications*):

---



---



---



---



---

# LIFTING EQUIPMENT SPREADER BEAMS



**SDSB**  
STANDARD DUTY SPREADER BEAM ..... Page 32-33

**ATSB**  
ADJUSTABLE TELESCOPIC SPREADER BEAM .....Page 34



**BXSB**  
BOX SPREADER BEAM ..... Page 35



**ECSB**  
END CAP SPREADER BEAM .....Page 36-41

# LIFTING EQUIPMENT



**PEERLESS  
QUICKSHIP**

Products eligible for Quick Ship display a QS icon.

## SDSB STANDARD DUTY SPREADER BEAM

SPREADER BEAMS

### FEATURES

- This style of lifter is utilized with upper rigging spread between two lift points that lowers the center of gravity and adds extra stability to the lift.
- This spreader beam should be utilized where headroom is not limited and comes standard with a pair of swivel hooks.
- Can be supplied with optional chain or wire rope top rigging.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Higher capacities
- Additional lengths
- Upper and lower shackle design
- Chain top rigging
- Wire rope top rigging



**Upper and Lower Shackle Option**  
Utilizes dual upper and lower shackles for connecting the rigging.

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)					Weight (Lbs.)	Chain Rigging Weight (Lbs.)
			Headroom at 45°	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height	Hook Opening		
SDSB-2-4	2	4	36	0.63	3	6	0.91	45	12
SDSB-2-6	2	6	48	0.63	3	6	0.91	60	15
SDSB-2-8	2	8	61	0.63	3	6	0.91	82	20
SDSB-2-10	2	10	74	0.63	3	6	0.91	95	25
SDSB-2-12	2	12	86	0.63	3	6	0.91	115	30
SDSB-2-16	2	16	111	0.63	3	6	0.91	225	40
SDSB-2-20	2	20	139	0.63	3	6	0.91	408	50
SDSB-2-24	2	24	164	0.63	3	6	0.91	445	60
SDSB-5-4	5	4	39	1	3.5	7	1.36	62	25
SDSB-5-6	5	6	51	1	3.5	7	1.36	78	32
SDSB-5-8	5	8	64	1	3.5	7	1.36	100	39
SDSB-5-10	5	10	77	1	3.5	7	1.36	117	46
SDSB-5-12	5	12	87	1	3.5	7	1.36	168	53
SDSB-5-16	5	16	116	1	3.5	7	1.36	305	67
SDSB-5-20	5	20	141	1	3.5	7	1.36	435	81
SDSB-5-24	5	24	166	1	3.5	7	1.36	661	95
SDSB-10-4	10	4	43	1.25	4.38	8.75	1.61	100	40
SDSB-10-6	10	6	56	1.25	4.38	8.75	1.61	122	52
SDSB-10-8	10	8	67	1.25	4.38	8.75	1.61	156	64
SDSB-10-10	10	10	81	1.25	4.38	8.75	1.61	180	76
SDSB-10-12	10	12	90	1.25	4.38	8.75	1.61	240	88
SDSB-10-16	10	16	119	1.25	4.38	8.75	1.61	380	112
SDSB-10-20	10	20	145	1.25	4.38	8.75	1.61	532	136
SDSB-10-24	10	24	171	1.25	4.38	8.75	1.61	915	160
SDSB-15-4	15	4	45	1.5	5.25	10.5	2.08	126	58
SDSB-15-6	15	6	58	1.5	5.25	10.5	2.08	155	75

\* 1 US Ton = 2,000 Lbs

cont.



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.




# SPREADER BEAMS



**PEERLESS  
QUICKSHIP**

**QS** Products eligible for Quick Ship display a QS icon.

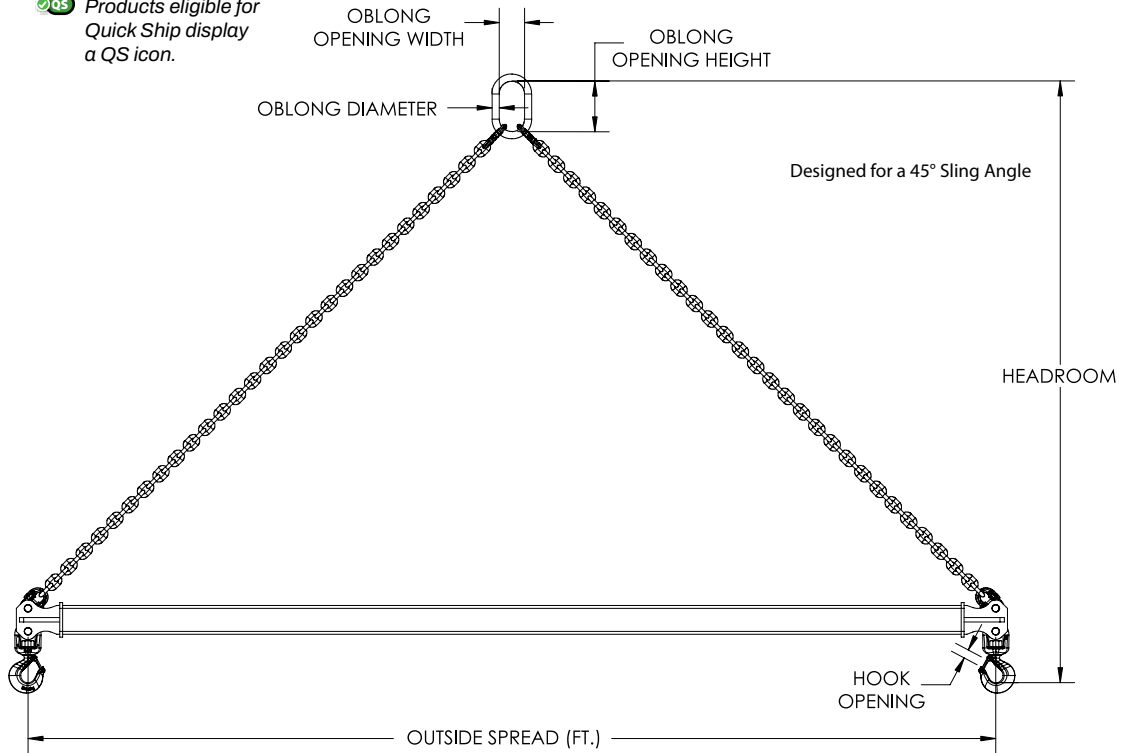

SPREADER BEAMS

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	Dimensions (Inches)					Weight (Lbs.)	Chain Rigging Weight (Lbs.)
			Headroom at 45°	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height	Hook Opening		
QS SDSB-15-8	15	8	68	1.5	5.25	10.5	2.08	185	92
QS SDSB-15-10	15	10	84	1.5	5.25	10.5	2.08	242	109
QS SDSB-15-12	15	12	97	1.5	5.25	10.5	2.08	270	126
QS SDSB-15-16	15	16	122	1.5	5.25	10.5	2.08	420	160
QS SDSB-15-20	15	20	147	1.5	5.25	10.5	2.08	665	194
QS SDSB-15-24	15	24	175	1.5	5.25	10.5	2.08	953	228
QS SDSB-20-4	20	4	48	1.75	6	12	2.27	170	55
QS SDSB-20-6	20	6	61	1.75	6	12	2.27	200	76
QS SDSB-20-8	20	8	72	1.75	6	12	2.27	233	99
QS SDSB-20-10	20	10	86	1.75	6	12	2.27	315	120
QS SDSB-20-12	20	12	99	1.75	6	12	2.27	350	142
QS SDSB-20-16	20	16	124	1.75	6	12	2.27	540	185
QS SDSB-20-20	20	20	147	1.75	6	12	2.27	775	228
QS SDSB-20-24	20	24	179	1.75	6	12	2.27	1341	272
QS SDSB-30-6	30	6	63	1.75	6	12	2.27	285	140
QS SDSB-30-8	30	8	74	1.75	6	12	2.27	402	171
QS SDSB-30-10	30	10	87	1.75	6	12	2.27	440	202
QS SDSB-30-12	30	12	100	1.75	6	12	2.27	530	234
QS SDSB-30-16	30	16	126	1.75	6	12	2.27	888	296
QS SDSB-30-20	30	20	152	1.75	6	12	2.27	1390	359
QS SDSB-40-6	40	6	68	2	7	14	3.02	563	217
QS SDSB-40-8	40	8	81	2	7	14	3.02	695	264
QS SDSB-40-10	40	10	93	2	7	14	3.02	781	312
QS SDSB-40-12	40	12	107	2	7	14	3.02	1058	358
QS SDSB-40-16	40	16	133	2	7	14	3.02	1364	454

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT


**ATSB** 

## ADJUSTABLE TELESCOPIC SPREADER BEAM

SPREADER BEAMS

### FEATURES

- This style of spreader beam is telescopic to accommodate various load sizes – 2 through 15 ton capacities, adjustable increments at 1" and 20 through 40 ton capacities, adjustable increments at 12".
- This style of lifter is utilized with upper rigging spread between two lift points that lowers the center of gravity and adds extra stability to the lift.
- This spreader beam should be utilized where headroom is not limited and comes with a pair of swivel hooks.
- Can be supplied with optional chain or wire rope top rigging.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

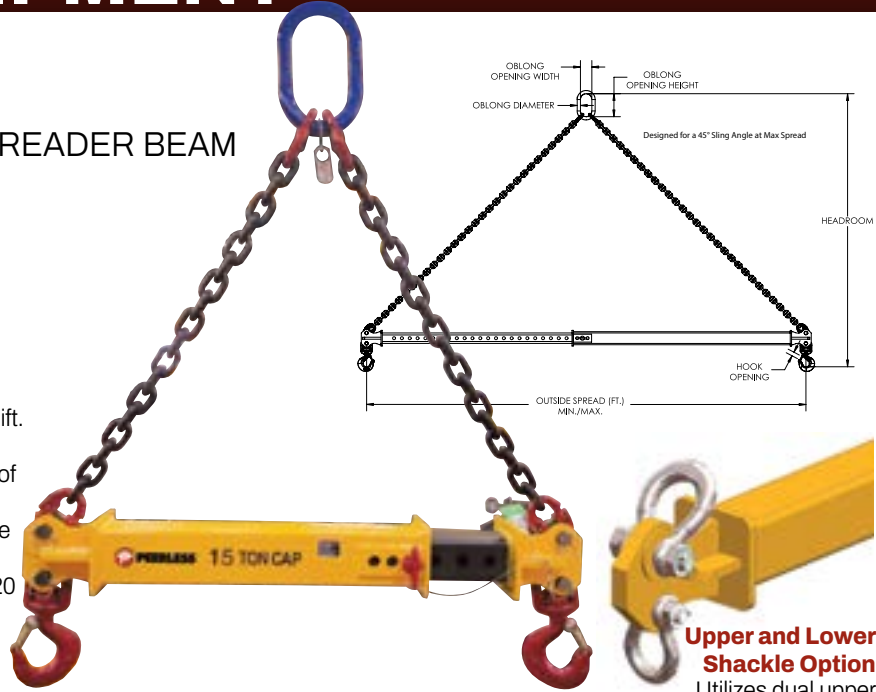

**Upper and Lower Shackle Option**  
Utilizes dual upper and lower shackles for connecting the rigging.

### OPTIONS

- Higher capacities
- Additional lengths
- Upper and lower shackle design
- Chain top rigging
- Wire rope top rigging

Model #	Capacity (US Tons)*	Outside Spread Min/Max (Ft.)	Dimensions (Inches)				Hook Opening	Beam & Hook Weight (Lbs.)	Chain Rigging Weight (Lbs.)
			Headroom Min/Max (Max at 45°)	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height			
ATSB-2-4/6	2	4/6	50/60	0.63	3	6	0.91	70	15
ATSB-2-6/10	2	6/10	76/92	0.63	3	6	0.91	85	25
ATSB-2-8/14	2	8/14	101/119	0.63	3	6	0.91	175	35
ATSB-2-12/20	2	12/20	139/174	0.63	3	6	0.91	245	50
ATSB-5-4/6	5	4/6	58/67	1	3.5	7	1.36	105	32
ATSB-5-6/10	5	6/10	83/100	1	3.5	7	1.36	160	46
ATSB-5-8/14	5	8/14	107/132	1	3.5	7	1.36	205	60
ATSB-5-12/20	5	12/20	145/181	1	3.5	7	1.36	670	81
ATSB-10-4/6	10	4/6	63/72	1.25	4.38	8.75	1.61	95	52
ATSB-10-6/10	10	6/10	78/117	1.25	4.38	8.75	1.61	175	76
ATSB-10-8/14	10	8/14	113/139	1.25	4.38	8.75	1.61	460	100
ATSB-10-12/20	10	12/20	151/171	1.25	4.38	8.75	1.61	680	136
ATSB-15-4/6	15	4/6	67/76	1.5	5.25	10.5	2.08	165	75
ATSB-15-6/10	15	6/10	91/109	1.5	5.25	10.5	2.08	365	109
ATSB-15-8/14	15	8/14	117/142	1.5	5.25	10.5	2.08	478	143
ATSB-15-12/20	15	12/20	154/189	1.5	5.25	10.5	2.08	700	194
ATSB-20-7/11	20	7/11	98/112	1.75	6	12	2.27	430	175
ATSB-20-9/15	20	9/15	129/151	1.75	6	12	2.27	540	225
ATSB-20-12/20	20	12/20	159/189	1.75	6	12	2.27	822	275
ATSB-30-7/11	30	7/11	107/121	2	7	14	3.02	615	240
ATSB-30-9/15	30	9/15	130/152	2	7	14	3.02	750	295
ATSB-30-12/20	30	12/20	162/192	2	7	14	3.02	1065	365
ATSB-40-7/11	40	7/11	110/124	2.25	8	16	3.02	620	375
ATSB-40-9/15	40	9/15	133/155	2.25	8	16	3.02	840	470
ATSB-40-12/20	40	12/20	162/193	2.25	8	16	3.02	1500	565

\* 1 US Ton = 2,000 Lbs



# SPREADER BEAMS



## BOX SPREADER BEAM

### FEATURES

- This style of spreader beam is designed to lift large uneven loads and can be rigged to handle objects with an offset center of gravity.
- Designed to meet your specific lifting requirements and can be manufactured in a welded or bolt together design.
- If adjustability is required, this style of box spreader beam can be designed with telescopic lengths and/or widths to accommodate various load sizes.
- This spreader beam should be utilized where headroom is not limited.
- This style of lifter is utilized with upper rigging spread between four lift points that lowers the center of gravity and adds extra stability to the lift.
- Can be supplied with chain or wire rope top rigging.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Higher capacities
- Additional lengths
- Upper and lower shackle design
- Chain top rigging
- Wire rope top rigging



*Shown with optional bolt up design.*



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT



## END CAP SPREADER BEAM


SPREADER BEAMS

### FEATURES

- This style of lifter is utilized with upper rigging spread between two lift points that lowers the center of gravity and adds extra stability to the lift.
- This spreader beam should be utilized where headroom is not limited and comes standard with upper and lower shackles.
- Standard pivoting lifting lugs provide the flexibility of a 75° to 90° lower rigging angle.
- Can be supplied with optional chain or wire rope top rigging.
- Engineered and manufactured in accordance to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Higher capacities
- Additional lengths
- Chain top rigging
- Wire rope top rigging

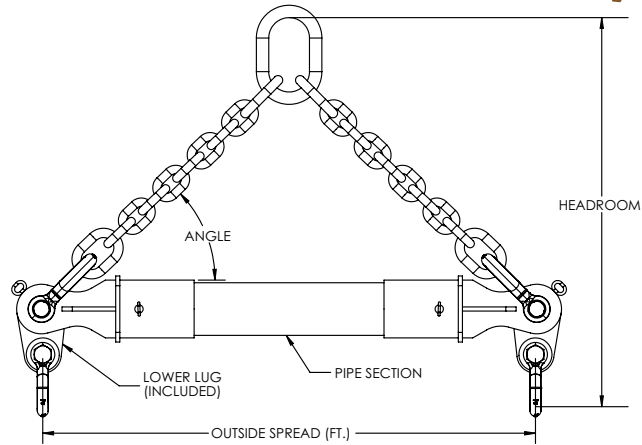

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	End Cap Model #	Pipe Size	Dimensions (Inches)					Top Shackle (Tons)	Bottom Shackle (Tons)	Weight (Lbs)
					Headroom at 45°	Headroom at 60°	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height			
ECSB-5-6	5	6	EC-5-25	5" SCH 80	60	86	1	3.5	7	17	13.5	384
ECSB-5-8	5	8	EC-5-25	5" SCH 80	72	106	1	3.5	7	17	13.5	426
ECSB-5-10	5	10	EC-5-25	5" SCH 80	84	128	1	3.5	7	17	13.5	467
ECSB-5-12	5	12	EC-5-25	5" SCH 80	96	148	1	3.5	7	17	13.5	509
ECSB-5-16	5	16	EC-5-25	5" SCH 80	120	192	1	3.5	7	17	13.5	592
ECSB-5-20	5	20	EC-5-25	5" SCH 80	144	232	1	3.5	7	17	13.5	675
ECSB-5-24	5	24	EC-5-25	5" SCH 80	168	274	1	3.5	7	17	13.5	758
ECSB-5-28	5	28	EC-5-25	5" SCH 80	192	316	1	3.5	7	17	13.5	841
ECSB-5-32	5	32	EC-8-50	8" SCH 80	224	364	1	3.5	7	35	25	1753
ECSB-5-36	5	36	EC-8-50	8" SCH 80	248	406	1	3.5	7	35	25	1927
ECSB-5-40	5	40	EC-8-50	8" SCH 80	272	446	1	3.5	7	35	25	2100
ECSB-10-6	10	6	EC-5-25	5" SCH 80	60	86	1.25	4.38	8.75	17	13.5	384
ECSB-10-8	10	8	EC-5-25	5" SCH 80	72	106	1.25	4.38	8.75	17	13.5	426
ECSB-10-10	10	10	EC-5-25	5" SCH 80	84	128	1.25	4.38	8.75	17	13.5	467
ECSB-10-12	10	12	EC-5-25	5" SCH 80	96	148	1.25	4.38	8.75	17	13.5	509
ECSB-10-16	10	16	EC-5-25	5" SCH 80	120	192	1.25	4.38	8.75	17	13.5	592
ECSB-10-20	10	20	EC-5-25	5" SCH 80	144	232	1.25	4.38	8.75	17	13.5	675
ECSB-10-24	10	24	EC-5-25	5" SCH 80	168	274	1.25	4.38	8.75	17	13.5	758
ECSB-10-28	10	28	EC-5-25	5" SCH 80	--	316	1.25	4.38	8.75	17	13.5	841
ECSB-10-32	10	32	EC-8-50	8" SCH 80	224	364	1.25	4.38	8.75	35	25	1753
ECSB-10-36	10	36	EC-8-50	8" SCH 80	248	406	1.25	4.38	8.75	35	25	1927
ECSB-10-40	10	40	EC-8-50	8" SCH 80	272	446	1.25	4.38	8.75	35	25	2100

\* 1 US Ton = 2,000 Lbs

cont.



# SPREADER BEAMS

## END CAP SPREADER BEAM cont.

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	End Cap Model #	Pipe Size	Dimensions (Inches)					Top Shackle (Tons)	Bottom Shackle (Tons)	Weight (Lbs)
					Head-room at 45°	Head-room at 60°	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height			
ECSB-15-6	15	6	EC-5-25	5" SCH 80	60	86	1.5	5.25	10.5	17	13.5	384
ECSB-15-8	15	8	EC-5-25	5" SCH 80	72	106	1.5	5.25	10.5	17	13.5	426
ECSB-15-10	15	10	EC-5-25	5" SCH 80	84	128	1.5	5.25	10.5	17	13.5	467
ECSB-15-12	15	12	EC-5-25	5" SCH 80	96	148	1.5	5.25	10.5	17	13.5	509
ECSB-15-16	15	16	EC-5-25	5" SCH 80	120	192	1.5	5.25	10.5	17	13.5	592
ECSB-15-20	15	20	EC-5-25	5" SCH 80	--	232	1.5	5.25	10.5	17	13.5	675
ECSB-15-24	15	24	EC-5-25	5" SCH 80	--	274	1.5	5.25	10.5	17	13.5	758
ECSB-15-28	15	28	EC-8-50	8" SCH 80	200	324	1.5	5.25	10.5	35	25	1580
ECSB-15-32	15	32	EC-8-50	8" SCH 80	224	364	1.5	5.25	10.5	35	25	1753
ECSB-15-36	15	36	EC-8-50	8" SCH 80	248	406	1.5	5.25	10.5	35	25	1927
ECSB-15-40	15	40	EC-8-50	8" SCH 80	272	446	1.5	5.25	10.5	35	25	2100
ECSB-20-6	20	6	EC-5-25	5" SCH 80	60	86	1.75	6	12	17	13.5	384
ECSB-20-8	20	8	EC-5-25	5" SCH 80	72	106	1.75	6	12	17	13.5	426
ECSB-20-10	20	10	EC-5-25	5" SCH 80	84	128	1.75	6	12	17	13.5	467
ECSB-20-12	20	12	EC-5-25	5" SCH 80	96	148	1.75	6	12	17	13.5	509
ECSB-20-16	20	16	EC-5-25	5" SCH 80	--	192	1.75	6	12	17	13.5	592
ECSB-20-20	20	20	EC-5-25	5" SCH 80	--	232	1.75	6	12	17	13.5	675
ECSB-20-24	20	24	EC-8-50	8" SCH 80	176	282	1.75	6	12	35	25	1406
ECSB-20-28	20	28	EC-8-50	8" SCH 80	200	324	1.75	6	12	35	25	1580
ECSB-20-32	20	32	EC-8-50	8" SCH 80	224	364	1.75	6	12	35	25	1753
ECSB-20-36	20	36	EC-8-50	8" SCH 80	--	406	1.75	6	12	35	25	1927
ECSB-20-40	20	40	EC-8-50	8" SCH 80	--	446	1.75	6	12	35	25	2100
ECSB-25-6	25	6	EC-5-25	5" SCH 80	60	86	1.75	6	12	17	13.5	384
ECSB-25-8	25	8	EC-5-25	5" SCH 80	72	106	1.75	6	12	17	13.5	426
ECSB-25-10	25	10	EC-5-25	5" SCH 80	84	128	1.75	6	12	17	13.5	467
ECSB-25-12	25	12	EC-5-25	5" SCH 80	96	148	1.75	6	12	17	13.5	509
ECSB-25-16	25	16	EC-5-25	5" SCH 80	--	192	1.75	6	12	17	13.5	592
ECSB-25-20	25	20	EC-8-50	8" SCH 80	--	232	1.75	6	12	35	25	1232
ECSB-25-24	25	24	EC-8-50	8" SCH 80	176	282	1.75	6	12	35	25	1406
ECSB-25-28	25	28	EC-8-50	8" SCH 80	200	324	1.75	6	12	35	25	1580
ECSB-25-32	25	32	EC-8-50	8" SCH 80	224	364	1.75	6	12	35	25	1753
ECSB-25-36	25	36	EC-8-50	8" SCH 80	--	406	1.75	6	12	35	25	1927
ECSB-25-40	25	40	EC-8-50	8" SCH 80	--	446	1.75	6	12	35	25	2100
ECSB-30-6	30	6	EC-5-50	5" SCH 80	68	94	1.75	6	12	35	25	450
ECSB-30-8	30	8	EC-5-50	5" SCH 80	--	114	1.75	6	12	35	25	492
ECSB-30-10	30	10	EC-5-50	5" SCH 80	--	136	1.75	6	12	35	25	533
ECSB-30-12	30	12	EC-5-50	5" SCH 80	--	156	1.75	6	12	35	25	575
ECSB-30-16	30	16	EC-8-50	8" SCH 80	128	200	1.75	6	12	35	25	1059
ECSB-30-20	30	20	EC-8-50	8" SCH 80	152	240	1.75	6	12	35	25	1232
ECSB-30-24	30	24	EC-8-50	8" SCH 80	176	282	1.75	6	12	35	25	1406
ECSB-30-28	30	28	EC-8-50	8" SCH 80	200	324	1.75	6	12	35	25	1580
ECSB-30-32	30	32	EC-8-50	8" SCH 80	224	364	1.75	6	12	35	25	1753
ECSB-30-36	30	36	EC-8-50	8" SCH 80	--	406	1.75	6	12	35	25	1927
ECSB-30-40	30	40	EC-12-80	12" SCH 80	278	452	1.75	6	12	55	55	4184
ECSB-40-6	40	6	EC-5-50	5" SCH 80	--	94	2.25	8	16	35	25	450
ECSB-40-8	40	8	EC-5-50	5" SCH 80	--	114	2.25	8	16	35	25	492
ECSB-40-10	40	10	EC-8-50	8" SCH 80	92	136	2.25	8	16	35	25	798
ECSB-40-12	40	12	EC-8-50	8" SCH 80	104	156	2.25	8	16	35	25	885
ECSB-40-16	40	16	EC-8-50	8" SCH 80	128	200	2.25	8	16	35	25	1059
ECSB-40-20	40	20	EC-8-50	8" SCH 80	152	240	2.25	8	16	35	25	1232
ECSB-40-24	40	24	EC-8-50	8" SCH 80	176	282	2.25	8	16	35	25	1406
ECSB-40-28	40	28	EC-8-50	8" SCH 80	--	324	2.25	8	16	35	25	1580
ECSB-40-32	40	32	EC-8-50	8" SCH 80	--	364	2.25	8	16	35	25	1753
ECSB-40-36	40	36	EC-12-80	12" SCH 80	254	412	2.25	8	16	55	55	3830
ECSB-40-40	40	40	EC-12-80	12" SCH 80	278	452	2.25	8	16	55	55	4184

\* 1 US Ton = 2,000 Lbs



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT



## END CAP SPREADER BEAM cont.



Model #	Capacity (US Tons)*	Outside Spread (Ft.)	End Cap Model #	Pipe Size	Dimensions (Inches)					Top Shackle (Tons)	Bottom Shackle (Tons)	Weight (Lbs)
					Head-room at 45°	Head-room at 60°	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height			
ECSB-50-6	50	6	EC-5-50	5" SCH 80	N/A	94	2.25	8	16	35	25	450
ECSB-50-8	50	8	EC-5-50	5" SCH 80	N/A	114	2.25	8	16	35	25	492
ECSB-50-10	50	10	EC-8-50	8" SCH 80	92	136	2.25	8	16	35	25	798
ECSB-50-12	50	12	EC-8-50	8" SCH 80	104	156	2.25	8	16	35	25	885
ECSB-50-16	50	16	EC-8-50	8" SCH 80	128	200	2.25	8	16	35	25	1059
ECSB-50-20	50	20	EC-8-50	8" SCH 80	152	240	2.25	8	16	35	25	1232
ECSB-50-24	50	24	EC-8-50	8" SCH 80	N/A	282	2.25	8	16	35	25	1406
ECSB-50-28	50	28	EC-8-50	8" SCH 80	N/A	324	2.25	8	16	35	25	1580
ECSB-50-32	50	32	EC-8-50	8" SCH 80	N/A	364	2.25	8	16	35	25	1753
ECSB-50-36	50	36	EC-12-80	12" SCH 80	254	412	2.25	8	16	55	55	3830
ECSB-50-40	50	40	EC-12-80	12" SCH 80	278	452	2.25	8	16	55	55	4184
ECSB-60-8	60	8	EC-8-80	8" SCH 80	84	120	2.5	8	16	55	55	896
ECSB-60-10	60	10	EC-8-80	8" SCH 80	96	140	2.5	8	16	55	55	982
ECSB-60-12	60	12	EC-8-80	8" SCH 80	108	162	2.5	8	16	55	55	1069
ECSB-60-16	60	16	EC-8-80	8" SCH 80	132	204	2.5	8	16	55	55	1243
ECSB-60-20	60	20	EC-8-80	8" SCH 80	N/A	246	2.5	8	16	55	55	1416
ECSB-60-24	60	24	EC-8-80	8" SCH 80	N/A	286	2.5	8	16	55	55	1590
ECSB-60-28	60	28	EC-8-80	8" SCH 80	N/A	328	2.5	8	16	55	55	1764
ECSB-60-32	60	32	EC-8-80	8" SCH 80	N/A	370	2.5	8	16	55	55	1937
ECSB-60-36	60	36	EC-12-80	12" SCH 80	254	412	2.5	8	16	55	55	3830
ECSB-60-40	60	40	EC-12-80	12" SCH 80	278	452	2.5	8	16	55	55	4184
ECSB-70-8	70	8	EC-8-80	8" SCH 80	84	120	2.75	9	16	55	55	896
ECSB-70-10	70	10	EC-8-80	8" SCH 80	96	140	2.75	9	16	55	55	982
ECSB-70-12	70	12	EC-8-80	8" SCH 80	N/A	162	2.75	9	16	55	55	1069
ECSB-70-16	70	16	EC-8-80	8" SCH 80	N/A	204	2.75	9	16	55	55	1243
ECSB-70-20	70	20	EC-12-80	12" SCH 80	156	246	2.75	9	16	55	55	2413
ECSB-70-24	70	24	EC-12-80	12" SCH 80	180	286	2.75	9	16	55	55	2769
ECSB-70-28	70	28	EC-12-80	12" SCH 80	204	328	2.75	9	16	55	55	3122
ECSB-70-32	70	32	EC-12-80	12" SCH 80	230	370	2.75	9	16	55	55	3476
ECSB-70-36	70	36	EC-12-80	12" SCH 80	254	412	2.75	9	16	55	55	3830
ECSB-70-40	70	40	EC-12-80	12" SCH 80	278	452	2.75	9	16	55	55	4184
ECSB-80-8	80	8	EC-8-80	8" SCH 80	84	120	3.25	10	20	55	55	896
ECSB-80-10	80	10	EC-8-80	8" SCH 80	N/A	140	3.25	10	20	55	55	982
ECSB-80-12	80	12	EC-8-80	8" SCH 80	N/A	162	3.25	10	20	55	55	1069
ECSB-80-16	80	16	EC-8-80	8" SCH 80	N/A	204	3.25	10	20	55	55	1243
ECSB-80-20	80	20	EC-12-80	12" SCH 80	156	246	3.25	10	20	55	55	2413
ECSB-80-24	80	24	EC-12-80	12" SCH 80	180	286	3.25	10	20	55	55	2768
ECSB-80-28	80	28	EC-12-80	12" SCH 80	204	328	3.25	10	20	55	55	3122
ECSB-80-32	80	32	EC-12-80	12" SCH 80	230	370	3.25	10	20	55	55	3476
ECSB-80-36	80	36	EC-12-80	12" SCH 80	254	412	3.25	10	20	55	55	3830
ECSB-80-40	80	40	EC-12-80	12" SCH 80	278	452	3.25	10	20	55	55	4184

\* 1 US Ton = 2,000 Lbs

cont.



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# SPREADER BEAMS

## END CAP SPREADER BEAM cont.

Model #	Capacity (US Tons)*	Outside Spread (Ft.)	End Cap Model #	Pipe Size	Dimensions (Inches)					Top Shackle (Tons)	Bottom Shackle (Tons)	Weight (Lbs)
					Head-room at 45°	Head-room at 60°	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height			
ECSB-90-8	90	8	EC-12-110	12" SCH 80	84	120	3.25	10	20	85	55	1519
ECSB-90-10	90	10	EC-12-110	12" SCH 80	96	140	3.25	10	20	85	55	1696
ECSB-90-12	90	12	EC-12-110	12" SCH 80	108	162	3.25	10	20	85	55	1873
ECSB-90-16	90	16	EC-12-110	12" SCH 80	132	204	3.25	10	20	85	55	2227
ECSB-90-20	90	20	EC-12-110	12" SCH 80	156	246	3.25	10	20	85	55	2581
ECSB-90-24	90	24	EC-12-110	12" SCH 80	180	286	3.25	10	20	85	55	2936
ECSB-90-28	90	28	EC-12-110	12" SCH 80	204	328	3.25	10	20	85	55	3290
ECSB-90-32	90	32	EC-12-110	12" SCH 80	230	370	3.25	10	20	85	55	3644
ECSB-90-36	90	36	EC-12-110	12" SCH 80	254	412	3.25	10	20	85	55	3998
ECSB-90-40	90	40	EC-12-110	12" SCH 80	N/A	452	3.25	10	20	85	55	4352
ECSB-100-8	100	8	EC-12-110	12" SCH 80	84	120	3.5	10	20	85	55	1519
ECSB-100-10	100	10	EC-12-110	12" SCH 80	96	140	3.5	10	20	85	55	1696
ECSB-100-12	100	12	EC-12-110	12" SCH 80	108	162	3.5	10	20	85	55	1873
ECSB-100-16	100	16	EC-12-110	12" SCH 80	132	204	3.5	10	20	85	55	2227
ECSB-100-20	100	20	EC-12-110	12" SCH 80	156	246	3.5	10	20	85	55	2581
ECSB-100-24	100	24	EC-12-110	12" SCH 80	180	286	3.5	10	20	85	55	2936
ECSB-100-28	100	28	EC-12-110	12" SCH 80	204	328	3.5	10	20	85	55	3290
ECSB-100-32	100	32	EC-12-110	12" SCH 80	230	370	3.5	10	20	85	55	3644
ECSB-100-36	100	36	EC-12-110	12" SCH 80	N/A	412	3.5	10	20	85	55	3998
ECSB-100-40	100	40	EC-12-110	12" SCH 80	N/A	452	3.5	10	20	85	55	4352
ECSB-110-8	110	8	EC-12-110	12" SCH 80	84	120	3.5	10	20	85	55	1519
ECSB-110-10	110	10	EC-12-110	12" SCH 80	96	140	3.5	10	20	85	55	1696
ECSB-110-12	110	12	EC-12-110	12" SCH 80	108	162	3.5	10	20	85	55	1873
ECSB-110-16	110	16	EC-12-110	12" SCH 80	132	204	3.5	10	20	85	55	2227
ECSB-110-20	110	20	EC-12-110	12" SCH 80	156	246	3.5	10	20	85	55	2581
ECSB-110-24	110	24	EC-12-110	12" SCH 80	180	286	3.5	10	20	85	55	2936
ECSB-110-28	110	28	EC-12-110	12" SCH 80	204	328	3.5	10	20	85	55	3290
ECSB-110-32	110	32	EC-12-110	12" SCH 80	N/A	370	3.5	10	20	85	55	3644
ECSB-110-36	110	36	EC-12-110	12" SCH 80	N/A	412	3.5	10	20	85	55	3998
ECSB-110-40	110	40	EC-12-110	12" SCH 80	N/A	452	3.5	10	20	85	55	4352
ECSB-120-8	120	8	EC-12-130	12" SCH 80	96	130	4	10	20	85	85	1539
ECSB-120-10	120	10	EC-12-130	12" SCH 80	108	152	4	10	20	85	85	1716
ECSB-120-12	120	12	EC-12-130	12" SCH 80	120	172	4	10	20	85	85	1893
ECSB-120-16	120	16	EC-12-130	12" SCH 80	144	216	4	10	20	85	85	2247
ECSB-120-20	120	20	EC-12-130	12" SCH 80	168	256	4	10	20	85	85	2601
ECSB-120-24	120	24	EC-12-130	12" SCH 80	192	298	4	10	20	85	85	2956
ECSB-120-28	120	28	EC-12-130	12" SCH 80	N/A	340	4	10	20	85	85	3310
ECSB-120-32	120	32	EC-12-130	12" SCH 80	N/A	380	4	10	20	85	85	3664
ECSB-120-36	120	36	EC-12-130	12" SCH 80	N/A	422	4	10	20	85	85	4018
ECSB-120-40	120	40	EC-12-130	12" SCH 80	N/A	462	4	10	20	85	85	4372
ECSB-130-8	130	8	EC-12-130	12" SCH 80	96	130	4	10	20	85	85	1539
ECSB-130-10	130	10	EC-12-130	12" SCH 80	108	152	4	10	20	85	85	1716
ECSB-130-12	130	12	EC-12-130	12" SCH 80	120	172	4	10	20	85	85	1893
ECSB-130-16	130	16	EC-12-130	12" SCH 80	144	216	4	10	20	85	85	2247
ECSB-130-20	130	20	EC-12-130	12" SCH 80	168	256	4	10	20	85	85	2601
ECSB-130-24	130	24	EC-12-130	12" SCH 80	N/A	298	4	10	20	85	85	2956
ECSB-130-28	130	28	EC-12-130	12" SCH 80	N/A	340	4	10	20	85	85	3310
ECSB-130-32	130	32	EC-12-130	12" SCH 80	N/A	380	4	10	20	85	85	3664
ECSB-130-36	130	36	EC-12-130	12" SCH 80	N/A	422	4	10	20	85	85	4018

\* 1 US Ton = 2,000 Lbs



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

## EC END CAP

### FEATURES

- This style of lifting component supplied in pairs allows the user to assemble their own spreader beam by incorporating A53 Grade B, schedule 80 pipe along with upper and lower rigging.
- This style of spreader beam when assembled adds extra stability to the lift.
- This assembled spreader beam should be utilized where headroom is not limited and comes standard with upper and lower shackles.
- Standard pivoting lifting lugs provide the flexibility of a 75° to 90° lower rigging angle.
- Includes standard assembly pins used to attach the End Cap to the A53 Grade B, schedule 80 pipe.
- Can be supplied with optional upper and lower shackles.
- Can be supplied with optional chain or wire rope top rigging.
- Engineered and manufactured in accordance to ASME B30.20 & BTH-1 Design Category B Service Class 2 and complies when assembled per factory specifications.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**



### OPTIONS

- Higher capacities
- Upper and lower shackles
- Chain top rigging
- Wire rope top rigging


Model #	Dimensions Capacity (US Tons)*			Schedule 80 Pipe Size (In.)	Schedule 80 Wall Thickness (In.)	Weight (Lbs.)
	Max Capacity	Top Shackle	Bottom Shackle			
EC-5-25	25	17	13.5	5	0.375	312
EC-5-50	50	35	25	5	0.375	378
EC-8-50	50	35	25	8	0.500	488
EC-8-80	80	55	55	8	0.500	672
EC-12-80	80	55	55	12	0.687	924
EC-12-110	110	85	55	12	0.687	1092
EC-12-130	130	85	85	12	0.687	1112

\* 1 US Ton = 2,000 Lbs

## ECP END CAP PIPE

### FEATURES

- This style of lifting component, A53 Grade B, schedule 80 pipe, allows the user to assemble their own spreader beam by attaching specified Peerless End Caps along with upper and lower rigging.
- This style of spreader beam when assembled adds extra stability to the lift.
- This assembled spreader beam should be utilized where headroom is not limited and comes standard with upper and lower shackles.
- Can be supplied with optional End Caps.
- Can be supplied with optional upper and lower shackles.
- Can be supplied with optional chain or wire rope top rigging.
- Complies with ASME B30.20 & BTH-1 Design Category B Service Class 2 when assembled per factory specifications.
- 100% of ALL Peerless End Cap Pipe is certified to the material specification supplied by the pipe manufacturer as well as for the working load limit that is listed in the End Cap Pipe chart when used in conjunction with the specified End Caps at the appropriate rigging angles.

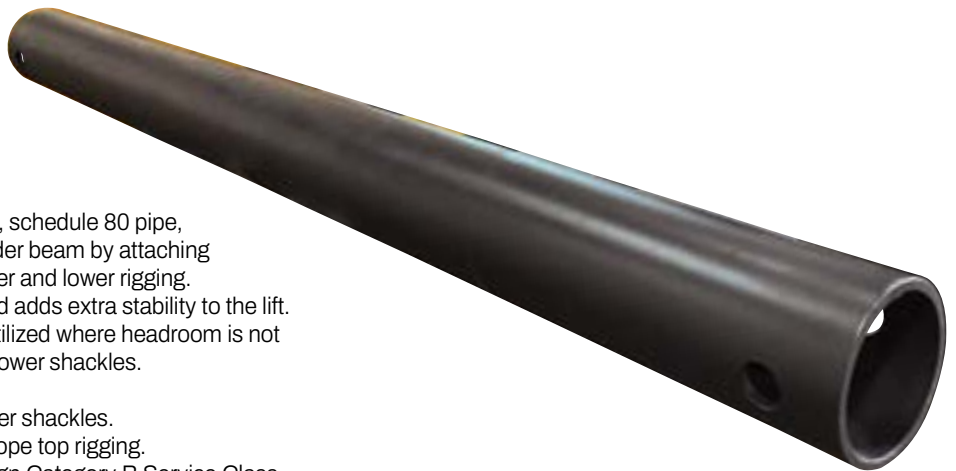

### OPTIONS

- Higher capacities
- Upper and lower shackles
- Chain top rigging
- Wire rope top rigging





# SPREADER BEAMS

## END CAP PIPE cont.

Model #	End Cap Model #	Pipe Size	Outside Spread (Ft.)	Capacity (US Tons)*	Schedule 80 Wall Thickness (In.)	Weight (Lbs)
ECP-5-6	EC-5-25	5" SCH 80	6	25	0.375	72
	EC-5-50	5" SCH 80	6	50	0.375	72
ECP-5-8	EC-5-25	5" SCH 80	8	25	0.375	114
	EC-5-50	5" SCH 80	8	50	0.375	114
ECP-5-10	EC-5-25	5" SCH 80	10	25	0.375	155
	EC-5-50	5" SCH 80	10	30	0.375	155
ECP-5-12	EC-5-25	5" SCH 80	12	25	0.375	197
	EC-5-50	5" SCH 80	12	30	0.375	197
ECP-5-16	EC-5-25	5" SCH 80	16	25	0.375	280
ECP-5-20	EC-5-25	5" SCH 80	20	20	0.375	363
ECP-5-24	EC-5-25	5" SCH 80	24	15	0.375	446
ECP-5-28	EC-5-25	5" SCH 80	28	10	0.375	529
ECP-8-8	EC-8-80	8" SCH 80	8	80	0.500	224
ECP-8-10	EC-8-50	8" SCH 80	10	50	0.500	310
	EC-8-80	8" SCH 80	10	80	0.500	310
ECP-8-12	EC-8-50	8" SCH 80	12	50	0.500	397
	EC-8-80	8" SCH 80	12	80	0.500	397
ECP-8-16	EC-8-50	8" SCH 80	16	50	0.500	571
	EC-8-80	8" SCH 80	16	80	0.500	571
ECP-8-20	EC-8-50	8" SCH 80	20	50	0.500	744
	EC-8-80	8" SCH 80	20	60	0.500	744
ECP-8-24	EC-8-50	8" SCH 80	24	50	0.500	918
	EC-8-80	8" SCH 80	24	60	0.500	918
ECP-8-28	EC-8-50	8" SCH 80	28	50	0.500	1092
	EC-8-80	8" SCH 80	28	60	0.500	1092
ECP-8-32	EC-8-50	8" SCH 80	32	50	0.500	1265
	EC-8-80	8" SCH 80	32	60	0.500	1265
ECP-8-36	EC-8-50	8" SCH 80	36	30	0.500	1439
ECP-8-40	EC-8-50	8" SCH 80	40	25	0.500	1612
ECP-12-8	EC-12-110	12" SCH 80	8	110	0.687	427
	EC-12-130	12" SCH 80	8	130	0.687	427
ECP-12-10	EC-12-110	12" SCH 80	10	110	0.687	604
	EC-12-130	12" SCH 80	10	130	0.687	604
ECP-12-12	EC-12-110	12" SCH 80	12	110	0.687	781
	EC-12-130	12" SCH 80	12	130	0.687	781
ECP-12-16	EC-12-110	12" SCH 80	16	110	0.687	1135
	EC-12-130	12" SCH 80	16	130	0.687	1135
ECP-12-20	EC-12-80	12" SCH 80	20	80	0.687	1489
	EC-12-110	12" SCH 80	20	110	0.687	1489
	EC-12-130	12" SCH 80	20	130	0.687	1489
ECP-12-24	EC-12-80	12" SCH 80	24	80	0.687	1844
	EC-12-110	12" SCH 80	24	110	0.687	1844
	EC-12-130	12" SCH 80	24	130	0.687	1844
ECP-12-28	EC-12-80	12" SCH 80	28	80	0.687	2198
	EC-12-110	12" SCH 80	28	110	0.687	2198
	EC-12-130	12" SCH 80	28	130	0.687	2198
ECP-12-32	EC-12-80	12" SCH 80	32	80	0.687	2552
	EC-12-110	12" SCH 80	32	110	0.687	2552
	EC-12-130	12" SCH 80	32	130	0.687	2552
ECP-12-36	EC-12-80	12" SCH 80	36	80	0.687	2906
	EC-12-110	12" SCH 80	36	110	0.687	2906
	EC-12-130	12" SCH 80	36	130	0.687	2906
ECP-12-40	EC-12-80	12" SCH 80	40	80	0.687	3260
	EC-12-110	12" SCH 80	40	110	0.687	3260
	EC-12-130	12" SCH 80	40	120	0.687	3260

\* 1 US Ton = 2,000 Lbs

SPREADER BEAMS



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# SPREADER BEAMS

Custom Application Form



For pricing information: Fax completed form & contact info to (800)-356-1149

## LOAD INFORMATION:

Describe the material you are planning to lift: \_\_\_\_\_

Spreader Beam Stand Required:  Yes  No

Total Number of Lifting Points: \_\_\_\_\_ Spacing Between Points \_\_\_\_\_

Is The CG (center of gravity) Of The Load Between Outer Lifting Points:  
 Yes  No If No, Describe CG Location \_\_\_\_\_

Rigging Type Used To Attach To Load:  Swivel Hooks  Shackles  
 Slings (specific type) \_\_\_\_\_  Other (specific type) \_\_\_\_\_

Rigging Type Used To Attach To Crane Hook:  Chain  Wire Rope  
 Desired Rigging Angle (45 degree recommended): \_\_\_\_\_

Load Dimensions:

	Min (in)	Max (in)
Height		
Width		
Length		
Weight		

## CRANE SPECIFICATIONS:

Distance Between Top Of The Load To The Crane Hook High Position(s): \_\_\_\_\_


Capacity Of The Crane(s): \_\_\_\_\_

Required Duty Cycle Of The Spreader Beam: Lifts Per Hour \_\_\_\_\_ Lifts Per Day \_\_\_\_\_

Crane Classification(s):  A  B  C  D  E  F

## CRANE HOOK SPECIFICATIONS (Inches):

A: \_\_\_ B: \_\_\_ C: \_\_\_ D: \_\_\_ E: \_\_\_ F: \_\_\_ G: \_\_\_ H: \_\_\_

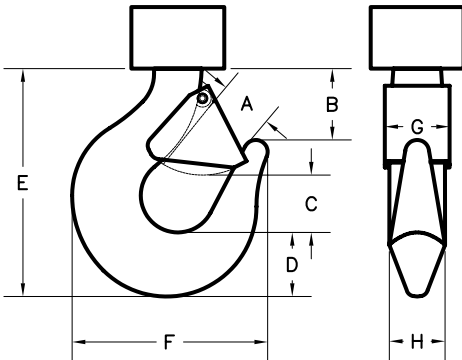

Please provide pertinent application information not supplied above (*extreme product or operating temperature, extreme environmental conditions such as temperature or moisture, space or headroom restrictions, additional specifications*):

---



---



---



---



---



---



---



---



---



---



## RLB

ROLL LIFTING BEAM..... Page 44



## MRL

MOTORIZED ROLL LIFTER..... Page 45

## RGT

ROLL GRIPPING TONGS..... Page 46



## RLCH

ROLL LIFTING C-HOOK..... Page 47

# LIFTING EQUIPMENT

## RLB ROLL LIFTING BEAM

### FEATURES

- This style of lifting beam is designed to easily lift and position rolls by the mandrel/shaft (when it is through the center of the roll) with plate style hooks.
- It can be utilized where headroom is limited and comes with a pair of fixed or pivoting plate style hooks.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Adjustable spread
- Higher capacities
- Additional lengths
- Lower headroom bail
- Twin bail designed for two hoists
- Spreader beam design with top rigging
- Additional hooks
- Urethane or bronze hook linings
- Beam stand



#### Adjustable Spread Option

Allows the lifter to handle rolls of varying widths.

#### Hook Lining Option

Utilizes bronze or urethane linings to provide additional protection to the mandrel or shaft.



#### Dual Bail Option

Utilizes multiple hoists to add stability to the lift.



#### Spreader Beam Design Option

Provides greater stability when headroom is not limited.





## MOTORIZED ROLL LIFTER

### FEATURES

- This style of lifter is designed to easily lift and position rolls by placing the lifting pins securely through the I.D. of the roll.
- Capacities at 5 tons and below.
- Designed to meet your specific roll lifting requirements.
- Can be utilized for a variety of roll widths where aisle clearance is limited.
- Manual chain wheel operation is available.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Parking and/or maintenance stands available
- Additional bail styles available



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

**RGT** 


## ROLL GRIPPING TONGS

### FEATURES

- This style of lifter is designed to easily lift and position rolls by gripping the outer diameter of the roll.
- Designed to meet your specific roll lifting requirements.
- Can be utilized for a variety of roll widths where aisle clearance is limited.
- Auto-latching mechanism supplied for easy one-person operation.
- Protective linings are available to minimize roll damage.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Parking and/or maintenance stands available

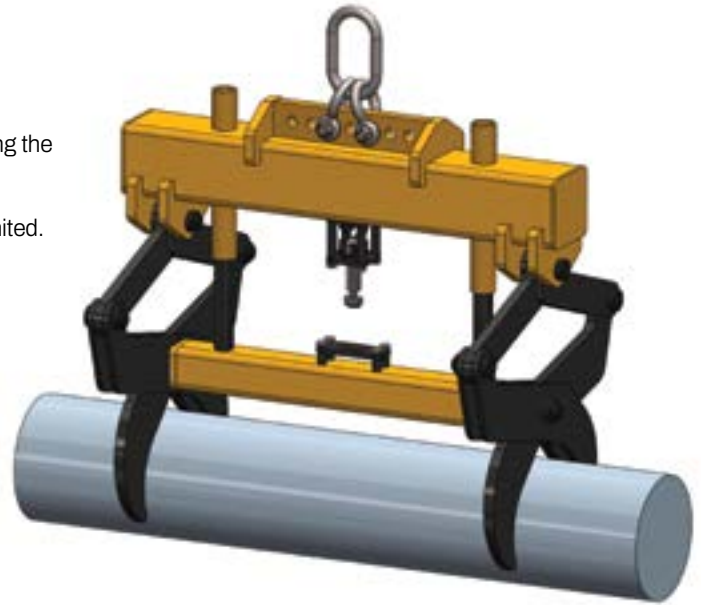



## ROLL LIFTING C-HOOK

### FEATURES

- This style of lifter is designed to easily lift and position rolls by placing the lifting arm securely through the I.D. of the roll.
- Supplied standard with lifter guide handle.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Higher capacities
- Additional lengths
- Larger throat opening
- Protective padding
- Parking stands



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# ROLL LIFTER

Custom Application Form



# PEERLESS®

For pricing information: Fax completed form & contact info to (800)-356-1149

## LOAD INFORMATION:

Describe the material you are planning to lift: \_\_\_\_\_

Roll Lifter Stand Required:  Yes  No

Is The CG (center of gravity) Of The Load Between Outer Lifting Points:  
 Yes  No If No, Describe CG Location \_\_\_\_\_

Will Roll Be Lifted With A Mandrel Or Shaft:  Yes  No  
If Yes: Mandrel/Shaft Dimensions (inches)  
Min Diameter \_\_\_\_\_ Length \_\_\_\_\_ Max Diameter \_\_\_\_\_ Length \_\_\_\_\_

Will Mandrel/Shaft Turn During Lift:  Yes  No

Mandrel/Shaft Hook Type: Plate Bent Bar Pivoting Fixed

Do Hooks Require Protective Lining:  Yes  No  
If Yes:  Urethane  Other (specify) \_\_\_\_\_  
If No, Roll I.D. Dimensions (inches): Min Diameter \_\_\_\_\_ Length \_\_\_\_\_ Max Diameter \_\_\_\_\_ Length \_\_\_\_\_

Bundled Load Dimensions:

	Min (in)	Max (in)
O.D.		
I.D.		
Length		
Weight		

## CRANE SPECIFICATIONS:

Crane Configuration:  Single  Double

Distance Between Top Of The Load To The Crane Hook High Position(s): \_\_\_\_\_

Capacity Of The Crane(s): \_\_\_\_\_ Distance Between Cranes (if applicable): \_\_\_\_\_

Required Duty Cycle Of The Roll Lifter: Lifts Per Hour \_\_\_\_\_ Lifts Per Day \_\_\_\_\_

Crane Classification(s):  A  B  C  D  E  F


## MOTORIZED ROLL LIFTER APPLICATION:

Operation:  Manual  Motorized:  AC  DC Voltage \_\_\_\_\_ Phase \_\_\_\_\_ Cycle \_\_\_\_\_

Controls Required:  Yes  No If Yes: Specify Type \_\_\_\_\_  Furnish Loose  Mounted On Lifter

## CRANE HOOK SPECIFICATIONS (Inches) :

A: \_\_\_ B: \_\_\_ C: \_\_\_ D: \_\_\_ E: \_\_\_ F: \_\_\_ G: \_\_\_ H: \_\_\_

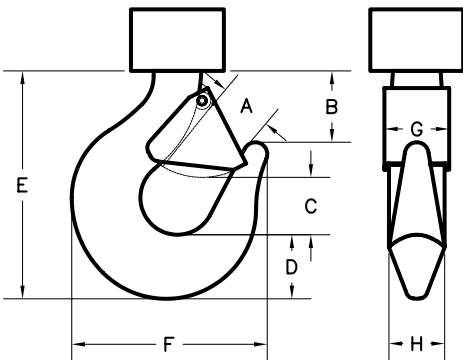

Please provide pertinent application information not supplied above (extreme product or operating temperature, extreme environmental conditions such as temperature or moisture, space or headroom restrictions, additional specifications):

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Application Forms available online at [kitocrosby.com](http://kitocrosby.com)





**CLNC**  
COIL LIFTER NARROW COIL..... Page 50



**CLCS**  
COIL LIFTER CLOSE STACKING..... Page 52



**CGV**  
COIL GRAB VERTICAL..... Page 54



**NACL**  
NARROW ARM COIL LIFTER ..... Page 56



**CL**  
COIL LIFTER..... Page 51



**CLSC**  
COIL LIFTER SLIT COIL..... Page 53



**CLT**  
COIL LIFTER TELESCOPIC TWO-SIDED ..... Page 55

# LIFTING EQUIPMENT



**PEERLESS  
INSTOCK**

**15** Products eligible for InStock display an IS icon.



## CLNC

### COIL LIFTER NARROW COIL


#### FEATURES

- This style of lifter is designed to easily lift and position narrow coils by placing the lifting arm securely through the I.D. of the coil.
- Supplied with standard lifter guide handle and radius on lifting arm to minimize coil damage.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

#### OPTIONS

- Higher capacities
- Additional lengths
- Higher throat sizes
- Protective padding
- Coil retainer cap
- Parking stands

COIL LIFTERS

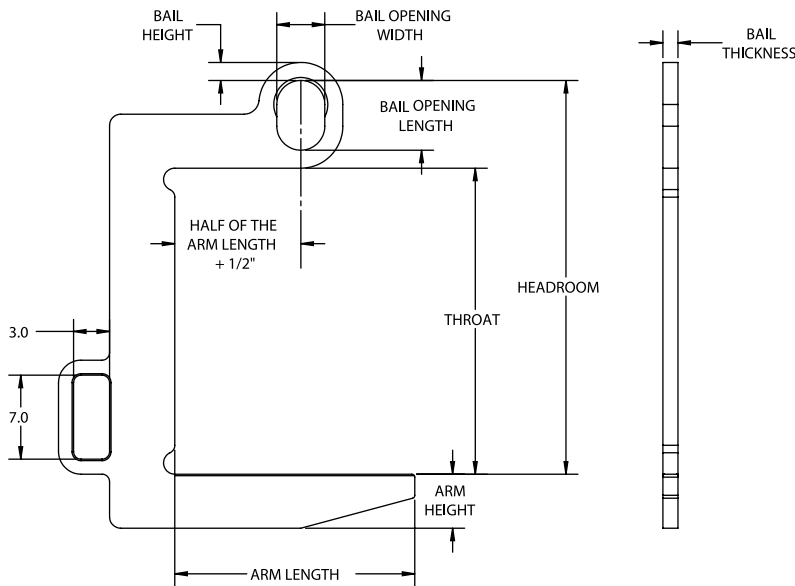

Model #	Capacity (US Tons)*	Dimensions (Inches)									Weight (Lbs.)
		Coil Width Max	Headroom	Lift Arm Length	Lift Arm Height	Throat Opening Height	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
CLNC-1/2-8	1/2	8	18.6	8	2.25	14.5	0.75	2	3.25	0.5	13
CLNC-1/2-12	1/2	12	18.6	12	2.25	14.5	0.75	2	3.25	0.5	14
CLNC-1-8	1	8	21.6	8	2.25	17.5	0.81	2	3.25	0.5	15
CLNC-1-16	1	16	21.6	16	3	17.5	0.81	2	3.25	0.5	22
CLNC-2-8	2	8	24.5	8	2.5	19.5	1	2.63	4	0.75	27
CLNC-2-16	2	16	24.5	16	3.25	19.5	1	2.63	4	0.75	41
CLNC-3.5-12	3.5	12	28.2	12	3.25	21.5	1.19	3.63	5.5	1	57
CLNC-3.5-16	3.5	16	28.2	16	3.75	21.5	1.19	3.63	5.5	1	69
CLNC-5-16	5	16	33	16	4	25.5	1.5	4	6	1.25	105
CLNC-5-20	5	20	33	20	4.5	25.5	1.5	4	6	1.25	121

\*1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# COIL LIFTERS





## FEATURES

- This style of heavy duty lifter is designed to easily lift and position large heavy coils by placing the lifting arm securely through the I.D. of the coil.
- Supplied with standard lifter guide handle and curved saddle on lifting arm to minimize coil damage, optional padding is available for additional coil protection.
- Counterbalanced to hang level when not loaded.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

## OPTIONS

- Higher capacities
- Additional lengths
- Larger throat sizes
- Protective padding
- Parking stands

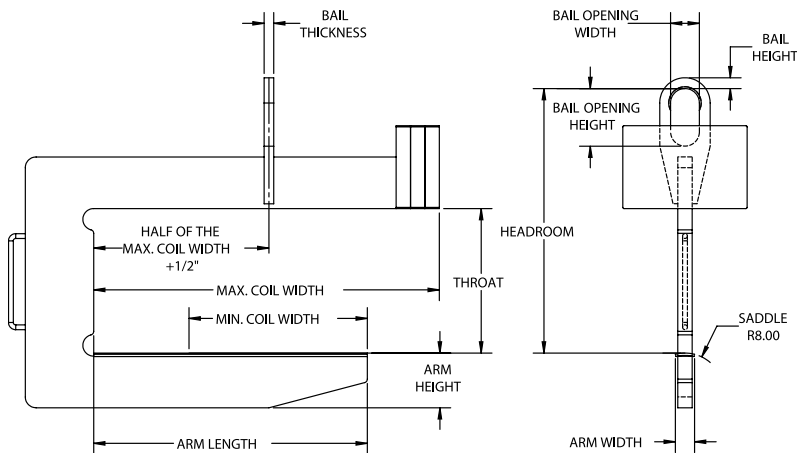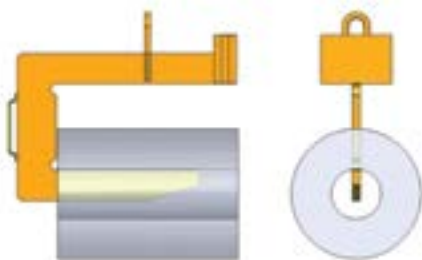

COIL LIFTERS

Model #	Capacity (US Tons)*	Coil Width Max/Min	Dimensions (Inches)									Weight (Lbs.)
			Headroom	Lift Arm Length	Lift Arm Height	Lift Arm Width	Throat Opening Height	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
CL-5-36	5	36/24	38	30	6.25	4	24	1.5	4	7	1.25	500
CL-5-48	5	48/30	38	39	6.25	4	24	1.5	4	7	1.25	730
CL-5-60	5	60/36	38.8	48	7	4	24	1.5	4	7	1.25	885
CL-7.5-36	7.5	36/24	38.3	30	6.5	4	24	1.5	4	7	1.5	725
CL-7.5-48	7.5	48/30	39	39	7.25	4	24	1.5	4	7	1.5	875
CL-7.5-60	7.5	60/36	39.8	48	8	4	24	1.5	4	7	1.5	1060
CL-10-48	10	48/30	42.5	39	8.25	4	24	2	5	9	1.75	1060
CL-10-60	10	60/36	42.5	48	8.25	4	24	2	5	9	1.75	1425
CL-10-72	10	72/42	43.3	57	9	4	24	2	5	9	1.75	1670
CL-15-48	15	48/30	49.3	39	9	4	30	2	5	9	1.75	1615
CL-15-60	15	60/36	50.3	48	10	4	30	2	5	9	1.75	1925
CL-15-72	15	72/42	51	57	10.75	4	30	2	5	9	1.75	2220
CL-20-60	20	60/36	54	48	10.5	4	30	2.25	6	12	2	2520
CL-20-72	20	72/42	55	57	11.5	4	30	2.25	6	12	2	2950
CL-25-60	25	60/36	61.5	48	11.75	4	34	2.5	6	14	2.25	3060
CL-25-72	25	72/42	62.5	57	12.75	4	34	2.5	6	14	2.25	3525
CL-30-60	30	60/36	62.75	48	12.75	4	34	2.75	6	14	2.5	3425
CL-30-72	30	72/42	62	57	12	5	34	2.75	6	14	2.5	4525
CL-40-72	40	72/42	72.3	57	13.75	5	38	3.25	7	18	3	5730
CL-50-84	50	84/48	77.5	66	16.5	5	40	3.75	7	18	3	7550

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.


# LIFTING EQUIPMENT



## COIL LIFTER CLOSE STACKING



### FEATURES

- This style of heavy duty lifter is designed with a recessed counterweight to allow for close coil stacking that maximizes floor space.
- Designed to easily lift and position large heavy coils by placing the lifting arm securely through the I.D. of the coil.
- Supplied with standard lifter guide handle and curved saddle on lifting arm to minimize coil damage, optional padding is available for additional coil protection.
- Counterbalanced to hang level when not loaded.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

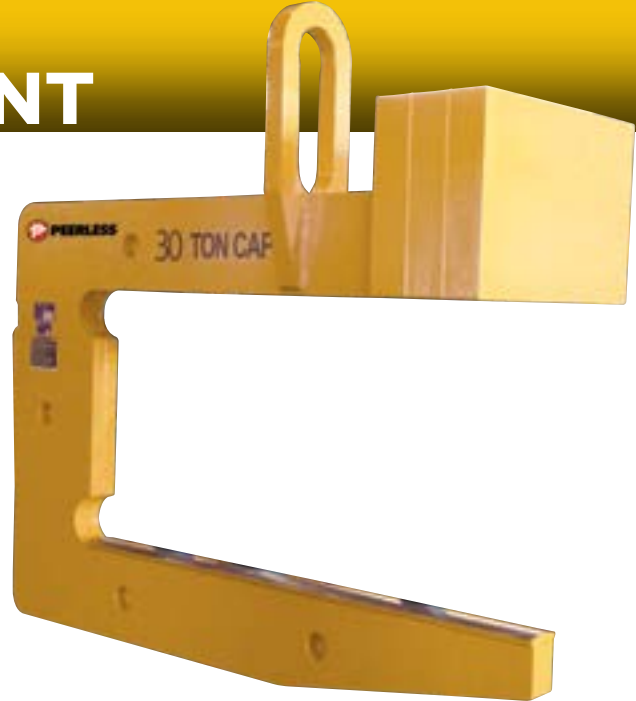

### OPTIONS

- Higher capacities
- Additional lengths
- Larger throat sizes
- Protective padding
- Parking stands

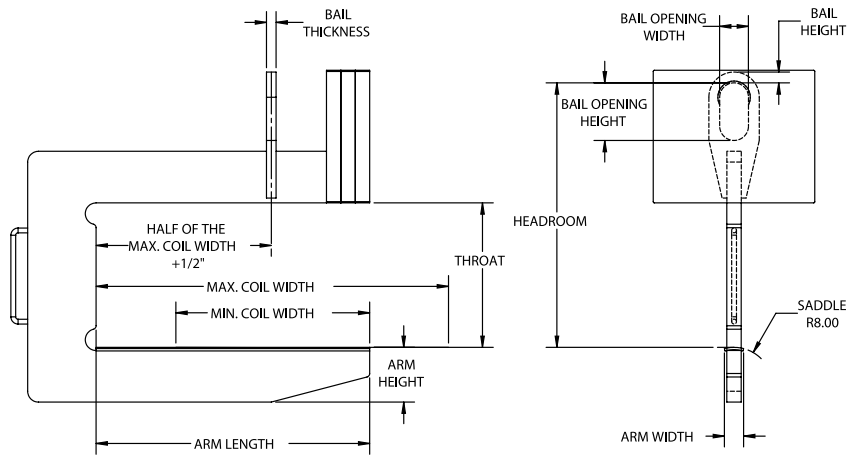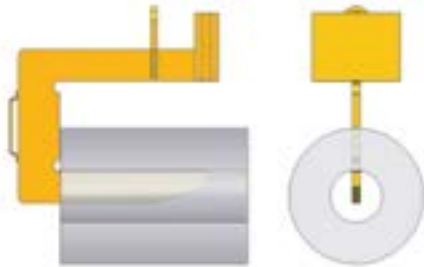

Model #	Capacity (US Tons)**	Dimensions (Inches)										Weight (Lbs.)
		Coil Width Max/Min	Head-room	Lift Arm Length	Lift Arm Height	Lift Arm Width	Throat Opening Height	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
CLCS-5-36	5	36/24	38	30	6.25	4	24	1.5	4	7	1.25	633
CLCS-5-48	5	48/30	38	39	6.25	4	24	1.5	4	7	1.25	950
CLCS-5-60	5	60/36	38.8	48	7	4	24	1.5	4	7	1.25	1150
CLCS-7.5-36	7.5	36/24	38.3	30	6.5	4	24	1.5	4	7	1.5	950
CLCS-7.5-48	7.5	48/30	39	39	7.25	4	24	1.5	4	7	1.5	1150
CLCS-7.5-60	7.5	60/36	39.8	48	8	4	24	1.5	4	7	1.5	1385
CLCS-10-48	10	48/30	42.5	39	8.25	4	24	2	5	9	1.75	1390
CLCS-10-60	10	60/36	42.5	48	8.25	4	24	2	5	9	1.75	1905
CLCS-10-72	10	72/42	43.3	57	9	4	24	2	5	9	1.75	2210
CLCS-15-48	15	48/30	49.3	39	9	4	30	2	5	9	1.75	2210
CLCS-15-60	15	60/36	50.3	48	10	4	30	2	5	9	1.75	2610
CLCS-15-72	15	72/42	51	57	10.75	4	30	2	5	9	1.75	2990
CLCS-20-60	20	60/36	54	48	10.5	4	30	2.25	6	12	2	3490
CLCS-20-72	20	72/42	55	57	11.5	4	30	2.25	6	12	2	4045
*CLCS-25-60	25	60/36	61.5	48	11.75	4	34	2.5	6	14	2.25	3620
*CLCS-25-72	25	72/42	62.5	57	12.75	4	34	2.5	6	14	2.25	4250
*CLCS-30-60	30	60/36	62.75	48	12.75	4	34	2.75	6	14	2.5	4060
*CLCS-30-72	30	72/42	62	57	12	5	34	2.75	6	14	2.5	5360
*CLCS-40-72	40	72/42	72.3	57	13.75	5	38	3.25	7	18	3	6805

\*Counterweight extends beyond the arm by one-half of the counterweight width (thickness). \*\*1 US Ton = 2,000 Lbs

COIL LIFTERS



# COIL LIFTERS



## CLSC COIL LIFTER SLIT COIL

### FEATURES

- This style of heavy duty lifter is designed to handle multiple slit coils maximizing efficiency.
- Designed to easily lift and position large heavy slit coils by placing the lifting arm securely through the I.D. of the coil.
- Supplied with standard lifter guide handle and curved saddle on lifting arm to minimize coil damage, optional padding is available for additional coil protection.
- Counterbalanced to hang level when not loaded.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Higher capacities
- Additional lengths
- Larger throat sizes
- Protective padding
- Parking stands

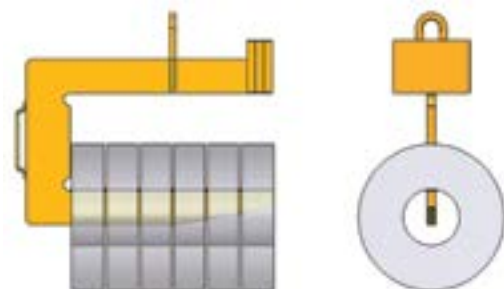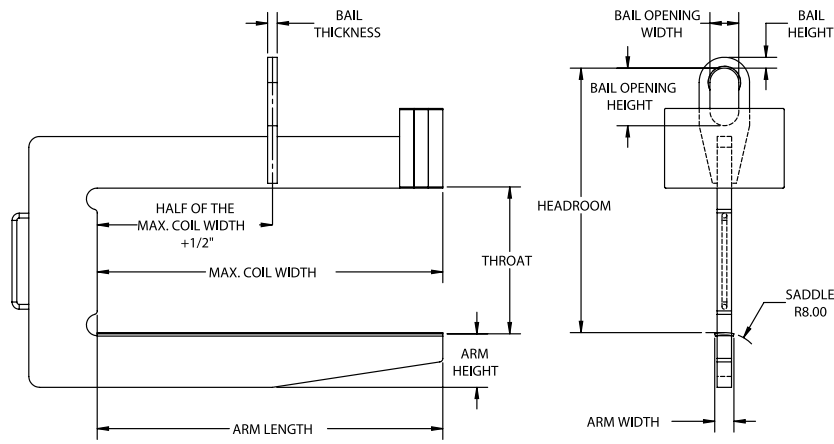

Model #	Capacity (US Tons)*	Dimensions (Inches)										Weight (Lbs.)
		Coil Width Max	Head-room	Lift Arm Length	Lift Arm Height	Lift Arm Width	Throat Opening Height	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
CLSC-5-36	5	36	38	36	6.25	4	24	1.5	4	7	1.25	510
CLSC-5-48	5	48	38	48	6.25	4	24	1.5	4	7	1.25	740
CLSC-5-60	5	60	38.8	60	7	4	24	1.5	4	7	1.25	905
CLSC-7.5-36	7.5	36	38.3	36	6.5	4	24	1.5	4	7	1.5	730
CLSC-7.5-48	7.5	48	39	48	7.25	4	24	1.5	4	7	1.5	890
CLSC-7.5-60	7.5	60	39.8	60	8	4	24	1.5	4	7	1.5	1080
CLSC-10-48	10	48	42.5	48	8.25	4	24	2	5	9	1.75	1070
CLSC-10-60	10	60	42.5	60	8.25	4	24	2	5	9	1.75	1450
CLSC-10-72	10	72	43.3	72	9	4	24	2	5	9	1.75	1700
CLSC-15-48	15	48	49.3	48	9	4	30	2	5	9	1.75	1630
CLSC-15-60	15	60	50.3	60	10	4	30	2	5	9	1.75	1945
CLSC-15-72	15	72	51	72	10.75	4	30	2	5	9	1.75	2255
CLSC-20-60	20	60	54	60	10.5	4	30	2.75	6	12	2	2540
CLSC-20-72	20	72	55	72	11.5	4	30	2.75	6	12	2	2985
CLSC-25-60	25	60	61.5	60	11.75	4	34	3.25	6	14	2.5	3085
CLSC-25-72	25	72	62.5	72	12.75	4	34	3.25	6	14	2.5	3560

\* 1 US Ton = 2,000 Lbs



**WARNING**

DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT



## COIL GRAB VERTICAL

### FEATURES


- This style of lifter is designed to handle coils that are stacked vertically.
- Supplied with manual adjusting legs that adjust to the I.D. of the coil with the standard hand wheel or optional chain wheel.
- Can be supplied with optional motorized leg drive.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Higher & lower capacities
- Additional lengths
- Protective padding
- Parking stands
- Motorized leg drive



COIL LIFTERS

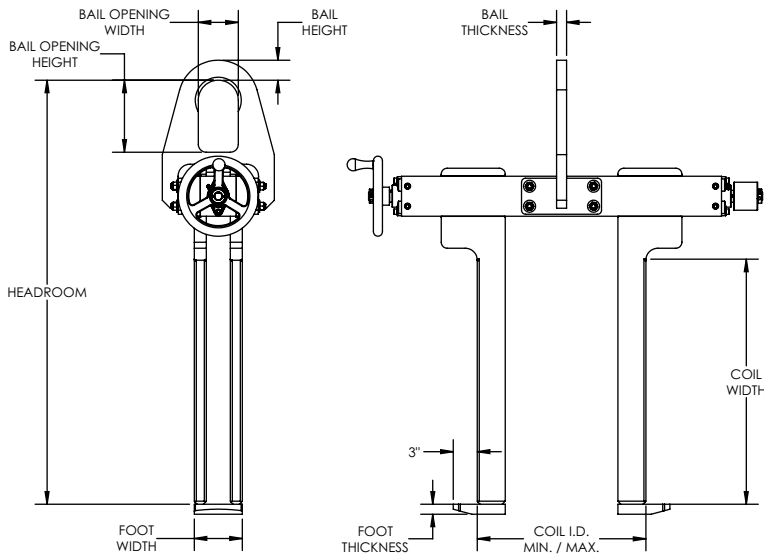

Model #	Capacity (US Tons)*	Coil ID Min/ Max	Dimensions (Inches)										Weight (Lbs.)
			Coil Width Max	Head-room	Foot Width	Foot Thickness	Foot Length	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness		
CGV-2.5-24	2.5	16/24	20	36	5	0.75	15.5	1.5	3	5	0.75	275	
CGV-5-24	5	16/24	24	41	6	1	15.5	2	4	7	1	385	
CGV-7.5-24	7.5	16/24	24	42	6	1	15.5	2	4	7	1	468	
CGV-10-24	10	16/24	30	50	6	1.5	15.5	2.5	5	9	1.25	550	

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# COIL LIFTERS

**CLT** 


## COIL LIFTER TELESCOPIC TWO-SIDED

### FEATURES

- This style of lifter is designed to efficiently handle coils with the inside diameter.
- The manual adjusting legs adjust to the I.D. of the coil with the standard chain wheel or an optional motorized leg drive and require less aisle space for operation.
- The self-locking gear drive prevents the inadvertent opening of the legs and curved foot pad minimizes coil damage.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**



### OPTIONS

- Higher capacities
- Additional lengths
- Protective padding
- Parking stands
- Motorized leg drive

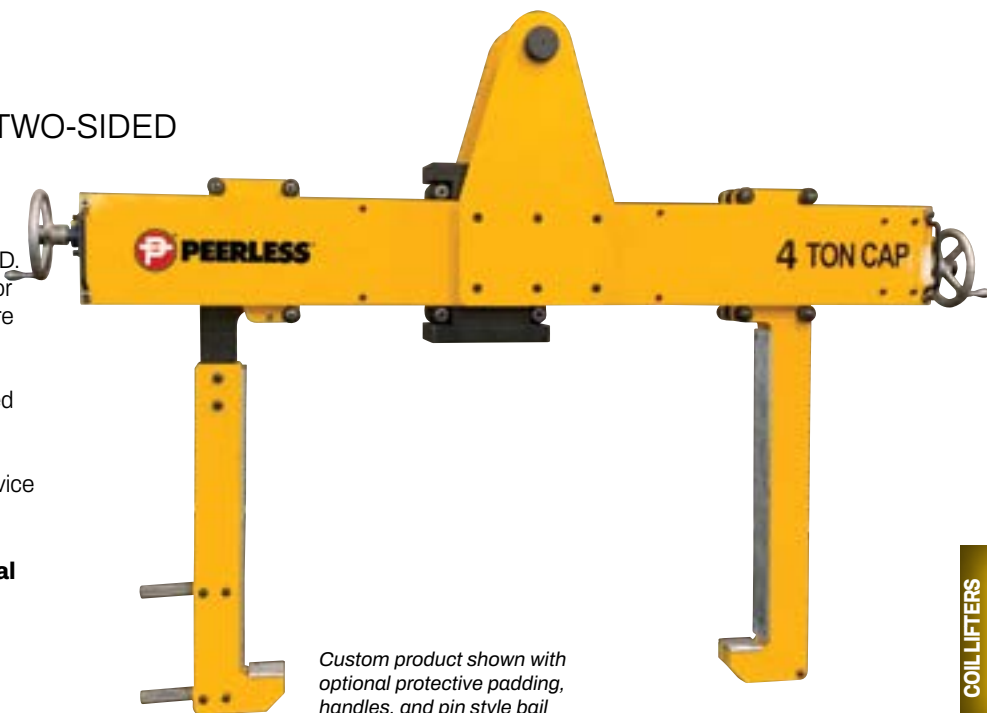

Custom product shown with optional protective padding, handles, and pin style bail

COIL LIFTERS

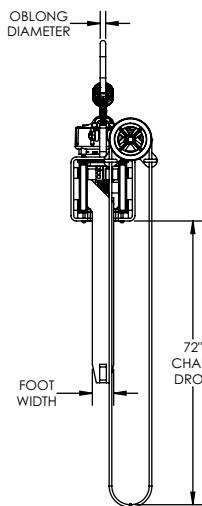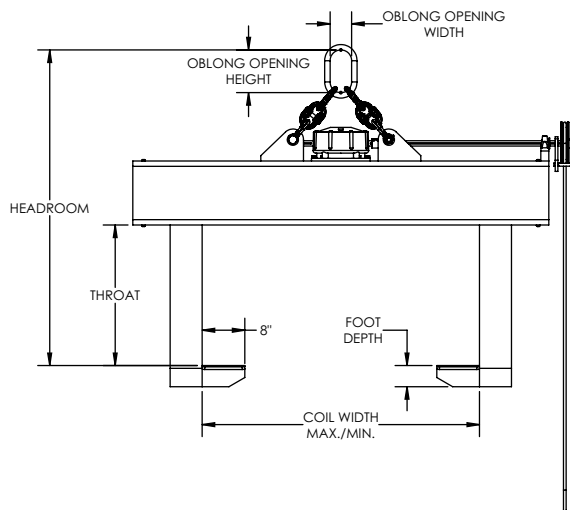

Model #	Capacity (US Tons)*	Dimensions (Inches)								Weight (Lbs.)
		Coil Width Min/Max	Throat Opening Height	Headroom	Foot Width	Foot Thickness	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height	
CLT-5-48	5	16/48	26	51	4	4	1	3.5	7	679
CLT-5-60	5	20/60	28	53	4	4	1	3.5	7	826
CLT-10-48	10	16/48	30	62	4	5	1.25	4.38	8.75	1015
CLT-10-60	10	20/60	32	64	4	5	1.25	4.38	8.75	1134
CLT-15-60	15	20/60	32	68	4	6	1.5	5.25	10.5	1302
CLT-15-72	15	24/72	34	70	4	6	1.5	5.25	10.5	1505

\*1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT





## NARROW ARM COIL LIFTER

### FEATURES

- This style of lifter is designed to efficiently handle coils with the inside diameter.
- The manual adjusting hooks easily adjust to the length of the coil and require less aisle space for operation.
- Supplied with standard plate style hooks with rounded corners to minimize coil damage. (Round bar hooks can be supplied as an option).
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied a No Additional Charge.**

### OPTIONS

- Higher capacities
- Additional lengths
- Protective padding
- Parking stands
- Round bar hooks

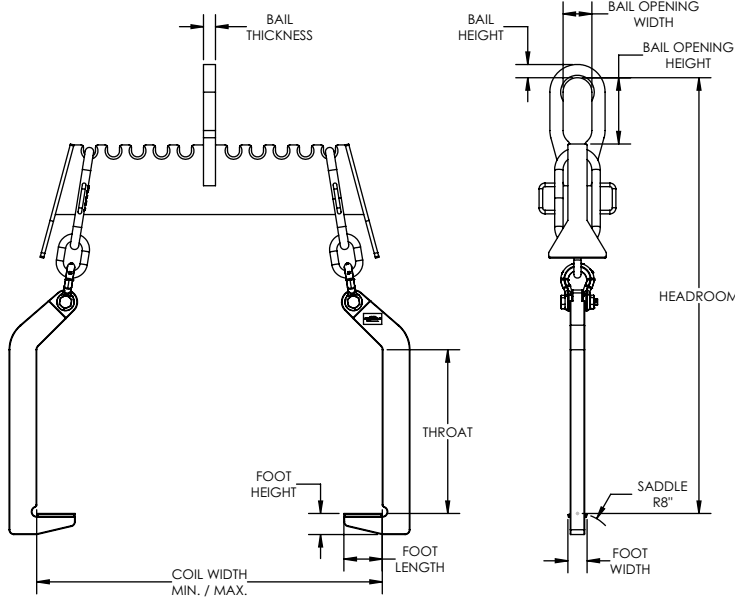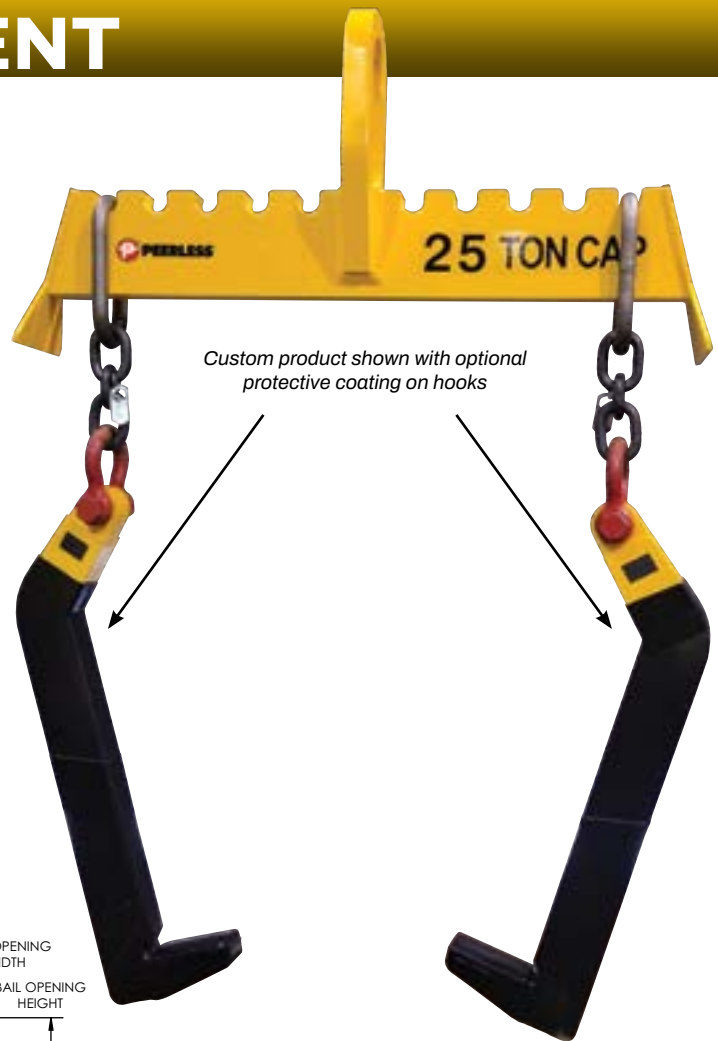

Model #	Capacity (US Tons)*	Dimensions (Inches)										Weight (Lbs.)
		Coil Width Min/Max	Throat Opening Height	Headroom	Foot Height	Foot Width	Foot Length	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
NACL-10-48	10	20/48	24	64	4	4	8	2	5	9	1.25	310
NACL-15-48	15	20/48	28	75	4.25	4	8	2	5	9	1.75	510
NACL-20-60	20	24/60	30	80	4.5	4	8	2.25	6	12	2	680
NACL-25-60	25	24/60	34	89	4.5	4	8	2.5	6	14	2.25	870
NACL-30-72	30	24/72	34	89	4.5	4	8	2.75	6	14	2.5	1100

\* 1 US Ton = 2,000 Lbs

COIL LIFTERS



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.



# COIL LIFTER

Custom Application Form



# PEERLESS®

For pricing information: Fax completed form & contact info to (800)-356-1149

## LOAD INFORMATION:

Describe the material you are planning to lift: \_\_\_\_\_

Coil Lifter Type Needed: \_\_\_\_\_

Coil Stand Required:  Parking  Maintenance  None

Coil Positioning During Lift:  Eye Vertical  Eye Horizontal

Coil Material:  Steel  Aluminum  Other (specify): \_\_\_\_\_

Is Coil Telescoped:  Yes  No If Yes, Material Length \_\_\_\_\_  O.D.  L.D.

Coil Features:  Banded  Oily  Tight Wound  Loose Wound  Other (specify): \_\_\_\_\_

Coil Placement: Prior To Lift: \_\_\_\_\_ Post Lift: \_\_\_\_\_

Does The Lifter Require Protective Lining To Prevent Coil Damage:  Yes  No

Is The Coil Hot:  Yes  No

If Yes: Max Temp \_\_\_\_\_ Required Contact Time With Material: \_\_\_\_\_ Min Time Between Lifts: \_\_\_\_\_

Coil Dimensions:

	Min (in)	Max (in)
O.D.		
I.D.		
Width/Height		
Weight		

## CRANE SPECIFICATIONS:

Distance Between Top Of The Load To The Crane Hook High Position(s): \_\_\_\_\_

Capacity Of The Crane(s): \_\_\_\_\_ Distance Between Cranes (if applicable): \_\_\_\_\_

Required Duty Cycle Of The Coil Lifter: Lifts Per Hour \_\_\_\_\_ Lifts Per Day \_\_\_\_\_

Crane Classification(s):  A  B  C  D  E  F


## MOTORIZED COIL LIFTER APPLICATION:

Operation:  Manual  Motorized:  AC  DC Voltage \_\_\_\_\_ Phase \_\_\_\_\_ Cycle \_\_\_\_\_

Controls Required:  Yes  No If Yes: Specify Type \_\_\_\_\_  Furnish Loose  Mounted On Lifter

## CRANE HOOK SPECIFICATIONS (Inches):

A: \_\_\_ B: \_\_\_ C: \_\_\_ D: \_\_\_ E: \_\_\_ F: \_\_\_ G: \_\_\_ H: \_\_\_

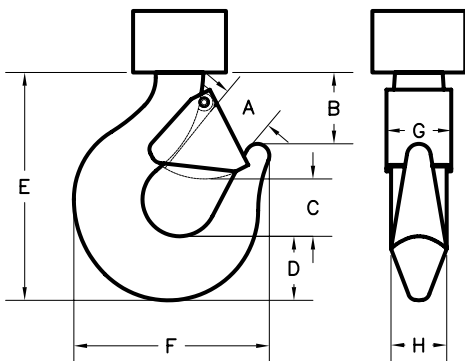

Please provide pertinent application information not supplied above (extreme product or operating temperature, extreme environmental conditions such as temperature or moisture, space or headroom restrictions, additional specifications):


\_\_\_\_\_

\_\_\_\_\_


\_\_\_\_\_

Application Forms available online at [kitocrosby.com/peerless](http://kitocrosby.com/peerless)

# BELOW-THE-HOOK LIFTING AND MATERIAL HANDLING EQUIPMENT

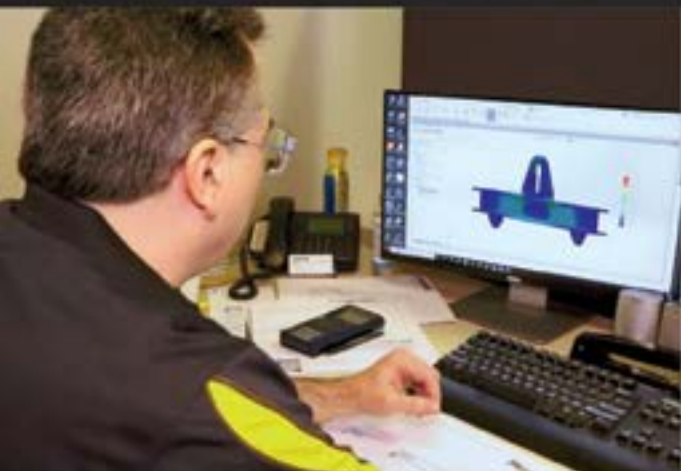

Engineered designs are in accordance with ASME B30.20 / BTH-1 and incorporate operation conditions along with a detailed examination of allowable stresses to determine fatigue life. Standard products are designed to ASME BTH-1 Design Category B / Service Class 2. Greater Design Categories and Service Classes are available.

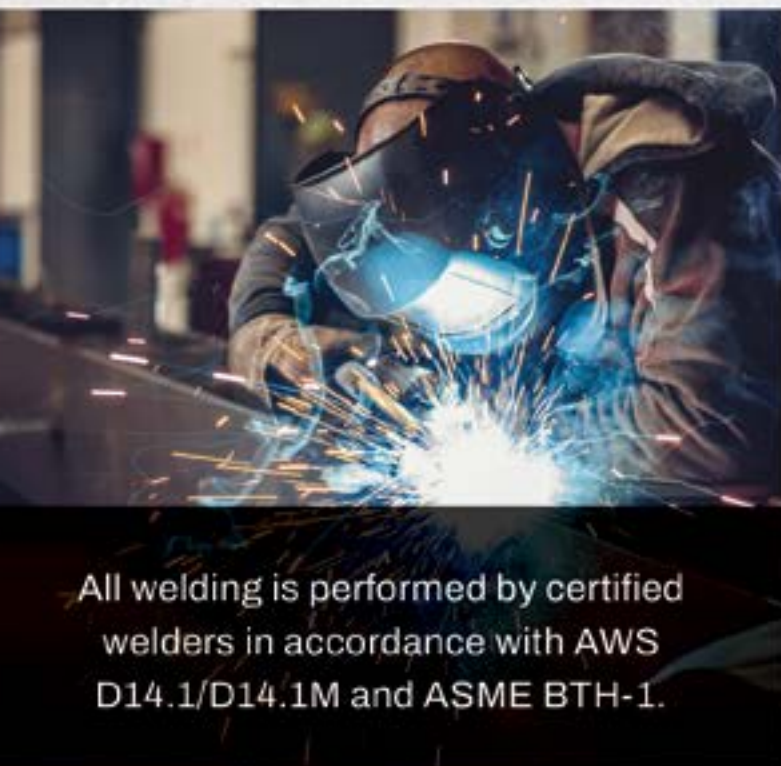

All welding is performed by certified welders in accordance with AWS D14.1/D14.1M and ASME BTH-1.



All Peerless Below-the-Hook lifting devices are tagged in accordance with ASME B30.20.





**BTA**

Bar Tong Adjustable ..... Page 60



**CUSTOM TONGS  
AVAILABLE**

Our Engineering team can assist you with designing a product to meet your specific lifting requirements.

Contact us today for a quote!

1-800-334-5643

CustomLifting.PCC@kitocrosby.com





## BAR TONG ADJUSTABLE

### FEATURES

- This style of adjustable diameter tong is ideal for lifting round bars, cast or steel pipe of various diameters.
- Hold open latch supplied on all 1 ton standard tongs.
- Can be supplied with optional replaceable urethane pads for additional load protection.
- The load must be balanced during the lift.
- Can be used in pairs attached to a lifting/spreader beam to handle longer loads.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Replaceable urethane pads
- Hold open latch
- Higher capacities available




**PEERLESS  
INSTOCK**

Products eligible for InStock display an IS icon.



TONGS

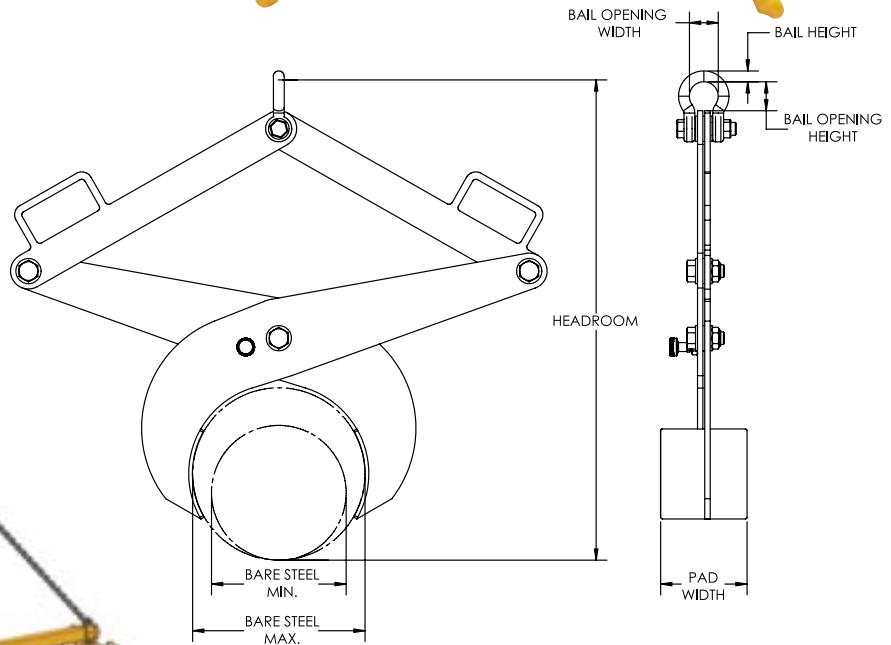

Model #	Capacity (US Tons)*	Dimensions (Inches)										Weight (Lbs.)
		Bare Steel Range Min	Bare Steel Range Max	Urethane Pad Range Min	Urethane Pad Range Max	Head-room Max	Head-room Min	Pad Width	Bail Height	Bail Opening Width	Bail Opening Height	
IS BTA-1/2-2.5/4	1/2	2.5	4	1.75	3.25	15	13	2.25	0.63	1.69	1.69	10
IS BTA-1-4/7	1	4	7	3.25	6.25	24	21	5	0.63	1.69	1.69	25
IS BTA-1-7/12	1	7	12	6.25	11.25	38	34	6	0.75	2	2	55
BTA-1-10/15	1	10	15	9.25	14.25	35	25	6	0.75	2.25	3.25	120
BTA-1-15/20	1	15	20	14.25	19.25	42	31	8	0.75	2.25	3.25	210

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# TONG

Custom Application Form



# PEERLESS®

For pricing information: Fax completed form & contact info to (800)-356-1149

## LOAD INFORMATION:

Describe the material you are planning to lift: \_\_\_\_\_

Tong Type Needed:

- Supporting (Designed to lift crates, boxes, containers, & other square/rectangular shaped materials)
- Indentation (Designed to lift ingots, boxes, bales, and other straight sided materials)

Supporting/Indentation Tong Load Dimensions:

Min (inches) Width \_\_\_\_\_ Length \_\_\_\_\_ Height \_\_\_\_\_ Weight \_\_\_\_\_

Max (inches) Width \_\_\_\_\_ Length \_\_\_\_\_ Height \_\_\_\_\_ Weight \_\_\_\_\_

Desired Tong Lift Point:  Width Side  Length Side

Product Positioning Prior Lift:  Flat Surface  Rack  Other (specify): \_\_\_\_\_

Product Positioning Post Lift:  Flat Surface  Rack  Other (specify): \_\_\_\_\_

Does Lifter Require Protective Lining To Prevent Damage To The Load:  Yes  No

Is A Latch Required (Used to assist with hands-free operation):  Yes  No

Is An Auto-Latch Required (Used to assist with hands-free operation):  Yes  No

Is The Load Hot:  Yes  No

If Yes: Max Temp: \_\_\_\_\_ Required Lifter/Load Contact Time : \_\_\_\_\_ Min Time Between Lifts \_\_\_\_\_


## CRANE SPECIFICATIONS:

Distance Between Top Of The Load To The Crane Hook High Position: \_\_\_\_\_

Crane Classification(s):  A  B  C  D  E  F

## CRANE HOOK SPECIFICATIONS (Inches):

A: \_\_\_ B: \_\_\_ C: \_\_\_ D: \_\_\_ E: \_\_\_ F: \_\_\_ G: \_\_\_ H: \_\_\_

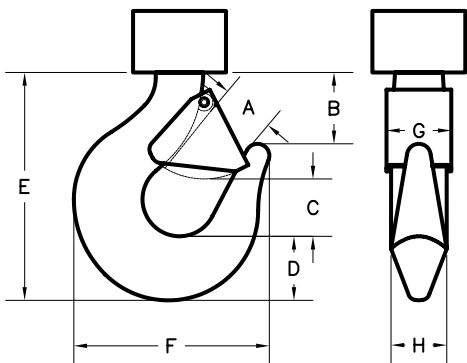

Please provide pertinent application information not supplied above (*extreme product or operating temperature, extreme environmental conditions such as temperature or moisture, space or headroom restrictions, additional specifications*):

---



---



---



---

# LIFTING EQUIPMENT



**SLHD**  
SHEET LIFTER HEAVY DUTY ..... Page 63

SHEET LIFTERS

**MSLHD**  
MOTORIZED SHEET LIFTER HEAVY DUTY ..... Page 64



# SHEET LIFTERS

**SLHD** 


## SHEET LIFTER HEAVY DUTY

### FEATURES

- This style of lifter is designed to lift and carry various sizes of bundles, sheets, and/or plates.
- Standard heavy duty direct drive, self-locking, machined rack and pinion leg adjustment.
- Standard heavy duty square tube H-Frame design.
- Easily maintained low headroom design.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- Load chains standard on all units with load widths capabilities of 72" or greater.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Chain wheel leg drive
- Extended hand wheel or chain wheel
- Extended shoe lengths
- Extended leg heights
- Load chains with plate hooks
- Heavy-duty hand-wheel package with slip clutch

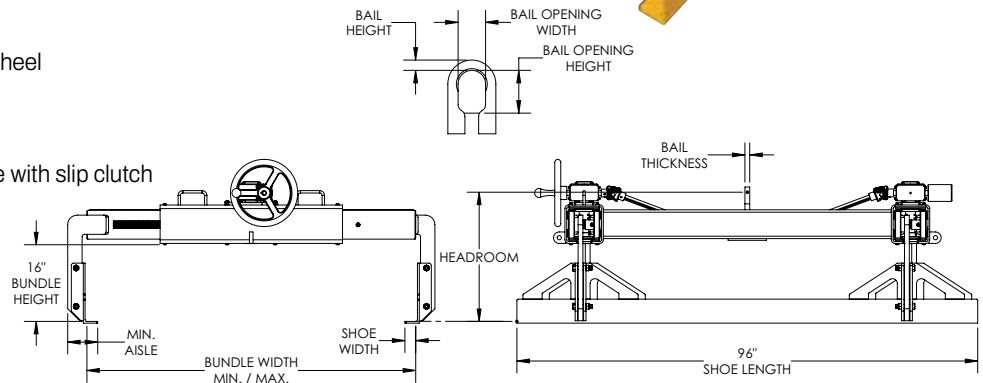

Model #	Capacity (US Tons)*	Dimensions (Inches)								Weight (Lbs.)
		Bundle Width Min/Max	Headroom	Shoe Width	Min. Aisle	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
SLHD-5-48	5	16/48	26	2.63	9	2	4	6	1	1670
SLHD-5-60	5	16/60	26	2.63	9	2	4	6	1	1740
SLHD-5-72	5	16/72	26	2.63	9	2	4	6	1	1820
SLHD-5-84	5	16/84	26	2.63	9	2	4	6	1	1890
SLHD-5-96	5	16/96	26	2.63	9	2	4	6	1	2300
SLHD-10-48	10	16/48	27	3.5	11	2	4	7	1.5	2700
SLHD-10-60	10	16/60	27	3.5	11	2	4	7	1.5	2800
SLHD-10-72	10	16/72	27	3.5	11	2	4	7	1.5	2930
SLHD-10-84	10	16/84	27	3.5	11	2	4	7	1.5	3030
SLHD-10-96	10	16/96	27	3.5	11	2	4	7	1.5	3150
SLHD-15-48	15	16/48	29	3.5	12	2.5	5	9	1.5	2890
SLHD-15-60	15	16/60	29	3.5	12	2.5	5	9	1.5	3220
SLHD-15-72	15	16/72	29	3.5	12	2.5	5	9	1.5	3340
SLHD-15-84	15	38/84	29	3.5	12	2.5	5	9	1.5	3850
SLHD-15-96	15	38/96	29	3.5	12	2.5	5	9	1.5	3980
SLHD-20-48	20	16/48	37	5.25	15	2.5	5	9	1.5	3255
SLHD-20-60	20	16/60	37	5.25	15	2.5	5	9	1.5	3560
SLHD-20-72	20	16/72	37	5.25	15	2.5	5	9	1.5	3875
SLHD-20-84	20	38/84	37	5.25	15	2.5	5	9	1.5	4550
SLHD-20-96	20	38/96	37	5.25	15	2.5	5	9	1.5	4900

\* 1 US Ton = 2,000 Lbs

SHEET LIFTERS



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

## MSLHD


### MOTORIZED SHEET LIFTER HEAVY DUTY

#### FEATURES

- This style of lifter is designed to lift and carry various sizes of bundles, sheets, and/or plates.
- Standard heavy duty direct drive, self-locking, machined rack and pinion leg adjustment.
- Standard heavy duty square tube H-Frame design.
- Standard heavy duty motor package with slip clutch to prevent damage to gearboxes from over adjustment. Includes 460 Volt 3-Phase 60Hz motor.
- Easily maintained low headroom design.
- Load chains standard on all units with load widths capabilities of 72" or greater.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

#### OPTIONS

- Extended shoe lengths
- Extended leg heights
- Load chains with plate hooks
- Pendant w/cord & electrical controls
- Additional voltages

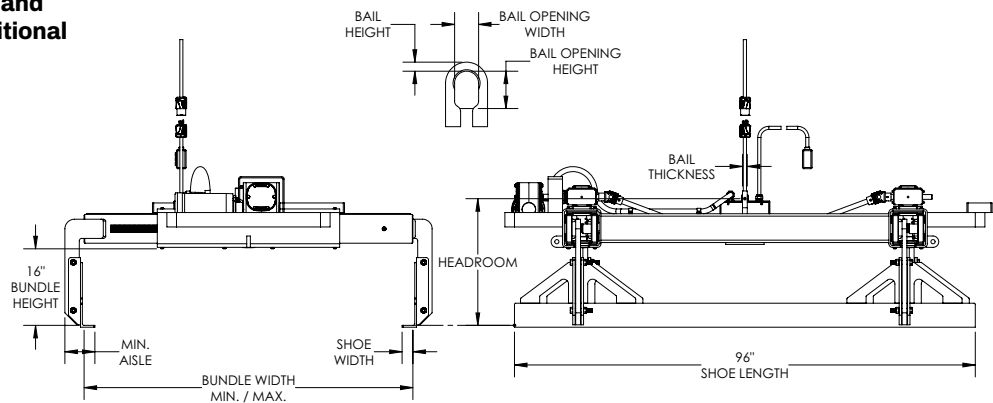

Model #	Capacity (US Tons)*	Dimensions (Inches)								Weight (Lbs.)
		Bundle Width Min/Max	Headroom	Shoe Width	Min. Aisle	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
MSLHD-5-48	5	16/48	26	2.63	9	2	4	6	1	2070
MSLHD-5-60	5	16/60	26	2.63	9	2	4	6	1	2140
MSLHD-5-72	5	16/72	26	2.63	9	2	4	6	1	2220
MSLHD-5-84	5	16/84	26	2.63	9	2	4	6	1	2290
MSLHD-5-96	5	16/96	26	2.63	9	2	4	6	1	2700
MSLHD-10-48	10	16/48	27	3.5	11	2	4	7	1.5	3100
MSLHD-10-60	10	16/60	27	3.5	11	2	4	7	1.5	3200
MSLHD-10-72	10	16/72	27	3.5	11	2	4	7	1.5	3330
MSLHD-10-84	10	16/84	27	3.5	11	2	4	7	1.5	3430
MSLHD-10-96	10	16/96	27	3.5	11	2	4	7	1.5	3450
MSLHD-15-48	15	16/48	29	3.5	12	2.5	5	9	1.5	3290
MSLHD-15-60	15	16/60	29	3.5	12	2.5	5	9	1.5	3620
MSLHD-15-72	15	16/72	29	3.5	12	2.5	5	9	1.5	3740
MSLHD-15-84	15	38/84	29	3.5	12	2.5	5	9	1.5	4250
MSLHD-15-96	15	38/96	29	3.5	12	2.5	5	9	1.5	4380
MSLHD-20-48	20	16/48	37	5.25	15	2.5	5	9	1.5	3655
MSLHD-20-60	20	16/60	37	5.25	15	2.5	5	9	1.5	3960
MSLHD-20-72	20	16/72	37	5.25	15	2.5	5	9	1.5	4275
MSLHD-20-84	20	38/84	37	5.25	15	2.5	5	9	1.5	4900
MSLHD-20-96	20	38/96	37	5.25	15	2.5	5	9	1.5	5200

\* 1 US Ton = 2,000 Lbs





# SHEET LIFTER

Custom Application Form



# PEERLESS®

For pricing information: Fax completed form & contact info to (800)-356-1149

## LOAD INFORMATION:

Describe the material you are planning to lift: \_\_\_\_\_

Material Conditions:  Banded  Loose  Dry  Oily

Manual (adjustment):  Yes  No

If Yes: Max Temp \_\_\_ Req Contact Time \_\_\_ Min Time Between Lifts \_\_\_

Will Individual Sheets Be Handled?  Yes  No

If Yes: Individual Sheet Plate Thickness (inches) Max \_\_\_\_\_ Min \_\_\_\_\_

Bundled Load Dimensions:

	Min (in)	Max (in)
Height		
Width		
Length		
Weight		

Is The Load Palletized?  Yes  No

If Yes: Pallet Dimensions (inches) Height \_\_\_\_\_ Width \_\_\_\_\_ Length \_\_\_\_\_ Weight \_\_\_\_\_

## SHEET LIFTER SPECIFICATIONS:

Operation:  Manual  Motorized  Hydraulic

If Manual (adjustment):  Hand Wheel  Chain Wheel  Extended Reach

If Motorized:  AC  DC Voltage \_\_\_\_\_ Phase \_\_\_\_\_ Cycle \_\_\_\_\_

If Yes Specify Type \_\_\_\_\_  Furnish Loose  Mounted On Lifter

Controls Required:  Yes  No

Load Chains With Plate Hooks:  Yes  No

Distance Between Top Of The Load To The Crane Hook High Position(s): \_\_\_\_\_


Capacity Of The Crane(s): \_\_\_\_\_

Required Duty Cycle Of The Sheet Lifter: Lifts Per Hour \_\_\_\_\_ Lifts Per Day \_\_\_\_\_

Crane Classification(s):  A  B  C  D  E  F

## CRANE HOOK SPECIFICATIONS (Inches):

A: \_\_\_ B: \_\_\_ C: \_\_\_ D: \_\_\_ E: \_\_\_ F: \_\_\_ G: \_\_\_ H: \_\_\_

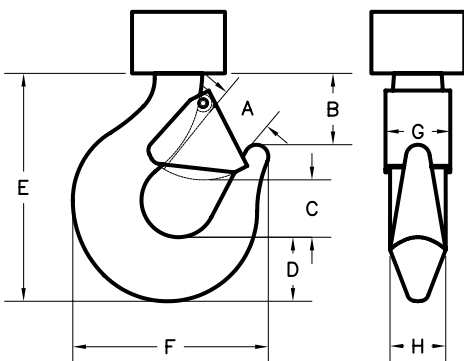

Please provide pertinent application information not supplied above (*extreme product or operating temperature, extreme environmental conditions such as temperature or moisture, space or headroom restrictions, additional specifications*):

---



---



---



---



---

Application Forms available online at [kitocrosby.com/peerless](http://kitocrosby.com/peerless)



# QUALITY

IS A KEY COMPONENT IN EVERY STEP OF  
THE PEERLESS MANUFACTURING PROCESS.

WHETHER YOU SELECT  
EQUIPMENT FROM OUR  
**COMPREHENSIVE  
STANDARDIZED  
PRODUCT CATALOG**

THAT INCLUDES:

LIFTING BEAMS  
SPREADER BEAMS  
ROLL LIFTERS  
COIL LIFTERS  
TONGS  
SHEET LIFTERS  
PALLET LIFTERS  
FORK TRUCK  
ACCESSORIES  
MATERIAL STANDS  
MATERIAL BASKETS



OR SELECT A LIFTING  
SOLUTION THAT IS  
**DESIGNED AND  
MANUFACTURED  
TO MEET YOUR  
SPECIFIC NEED.**



**PL**  
FIXED FORK PALLET LIFTER..... Page 68



**PLAF**  
ADJUSTABLE FORK PALLET LIFTER ..... Page 69



**PLHW**  
ADJUSTABLE FORK PALLET LIFTER ..... Page 70



**PLHD**  
FIXED FORK HEAVY DUTY  
PALLET LIFTER..... Page 71



**PLHA**  
ADJUSTABLE FORK HEAVY DUTY  
PALLET LIFTER..... Page 72



**PLAH**  
ADJUSTABLE FORK HEAVY DUTY PALLET LIFTER  
w/Hand Wheel..... Page 73



**PLWL**  
WHEELED PALLET LIFTER..... Page 74



**PLLW**  
LIGHTWEIGHT PALLET LIFTER..... Page 75



PALLET LIFTERS

# LIFTING EQUIPMENT




## FIXED FORK PALLET LIFTER

### FEATURES

- This style of lifter is designed to lift and carry palletized loads efficiently with an overhead crane.
- Counter balanced to hang level when unloaded.
- Easily maintained low headroom design.
- The bail is a lower headroom design and is positioned to avoid side loading the crane hook.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Larger throat openings
- Greater outside fork widths
- Additional sizes and capacities available

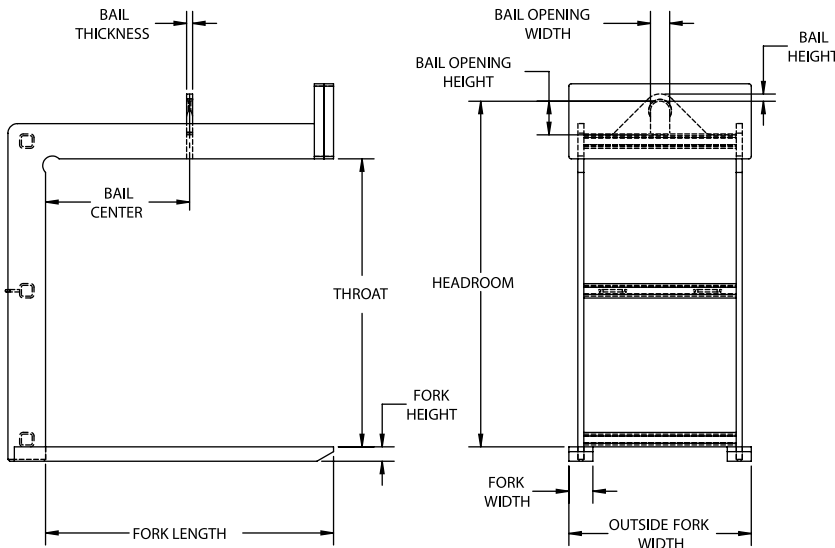

PALLET LIFTERS

Model #	Capacity (US Tons)*	Dimensions (Inches)											Weight (Lbs.)
		Fork Length	Fork Width	Fork Height	Outside Fork Width	Bail Center	Throat Opening Height	Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
PL-1-36	1	36	2	2	25	18	48	57.5	0.88	3	5	0.75	425
PL-1-42	1	42	2	2	25	21	48	57.5	0.88	3	5	0.75	450
PL-1-48	1	48	2	2	25	24	48	58.5	0.88	3	5	0.75	540
PL-1.5-36	1.5	36	3	2	25	18	48	58.5	0.88	3	5	0.75	565
PL-1.5-42	1.5	42	3	2	25	21	48	58.5	0.88	3	5	0.75	630
PL-1.5-48	1.5	48	3	2	25	24	48	58.5	0.88	3	5	0.75	665
PL-2-36	2	36	3	2	25	18	48	59.5	0.88	3	5	0.75	650
PL-2-42	2	42	4	2	25	21	48	59.5	0.88	3	5	0.75	780
PL-2-48	2	48	4	2	25	24	48	59.5	0.88	3	5	0.75	910
PL-3-42	3	42	4.5	2.5	25	21	48	61.5	1.25	3	5	1	1110
PL-3-48	3	48	4.5	2.5	27	24	48	61.5	1.25	3	5	1	1195
PL-3-54	3	54	4.5	2.5	30	27	48	61.5	1.25	3	5	1	1405
PL-4-48	4	48	5	3	27	24	48	63.5	1.25	3	5	1	1705
PL-4-60	4	60	5	3	30	30	60	75.5	1.25	3	5	1	2020
PL-5-48	5	48	5	3	30	24	48	63.5	1.5	4	7	1.25	1730
PL-5-60	5	60	5	3	38	30	60	75.5	1.5	4	7	1.25	2035

NOTE: Additional 2"-3" clearance is recommended above the load for ease of loading and unloading the pallet lifter. \* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# PALLET LIFTERS




## ADJUSTABLE FORK PALLET LIFTER

### FEATURES

- This style of lifter is designed to lift and carry palletized loads efficiently with an overhead crane.
- Supplied standard with manually adjustable forks that allow the lifter to handle various pallet sizes.
- Counter balanced to hang level when unloaded.
- Easily maintained low headroom design.
- The bail is a lower headroom design and is positioned to avoid side loading the crane hook.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Larger throat openings
- Greater outside fork widths
- Additional sizes and capacities available

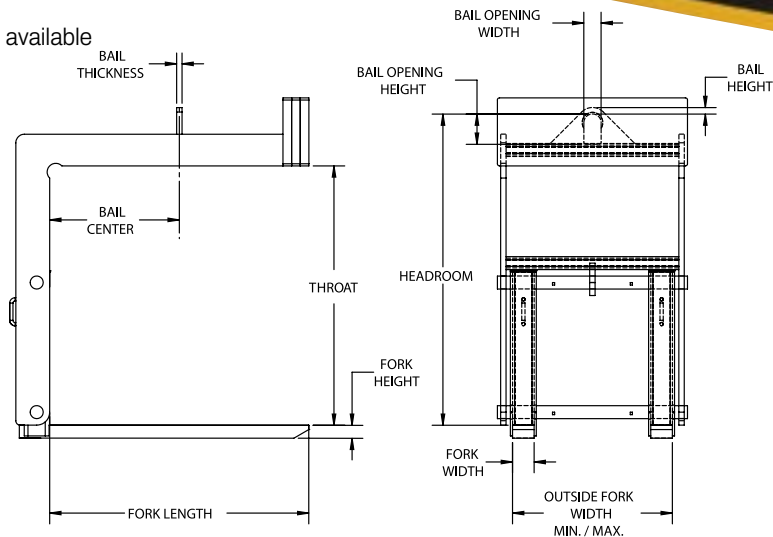

Model #	Capacity (US Tons)*	Dimensions (Inches)											Weight (Lbs.)
		Fork Length	Fork Width	Fork Height	Outside Fork Width Min/Max	Bail Center	Throat Opening Height	Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
PLAF-1-36	1	36	2	2	16/38	18	48	58	0.88	3	5	0.75	900
PLAF-1-42	1	42	2	2	16/38	21	48	58	0.88	3	5	0.75	1025
PLAF-1-48	1	48	2	2	16/38	24	48	59	0.88	3	5	0.75	1050
PLAF-1.5-36	1.5	36	3	2	16/38	18	48	59	0.88	3	5	0.75	1140
PLAF-1.5-42	1.5	42	3	2	16/38	21	48	59	0.88	3	5	0.75	1215
PLAF-1.5-48	1.5	48	3	2	16/38	24	48	60	0.88	3	5	0.75	1285
PLAF-2-36	2	36	3	2	16/38	18	48	60	0.88	3	5	0.75	1325
PLAF-2-42	2	42	4	2	16/38	21	48	60	0.88	3	5	0.75	1435
PLAF-2-48	2	48	4	2	16/38	24	48	60	0.88	3	5	0.75	1460
PLAF-3-42	3	42	4.5	2.5	16/38	21	48	61.5	1.25	3	5	1	1690
PLAF-3-48	3	48	4.5	2.5	16/38	24	48	61.5	1.25	3	5	1	1850
PLAF-3-54	3	54	4.5	2.5	16/38	27	48	63	1.25	3	5	1	2700
PLAF-4-48	4	48	5	3	16/38	24	48	64	1.25	3	5	1	2160
PLAF-4-60	4	60	5	3	16/38	30	60	76	1.25	3	5	1	3025
PLAF-5-48	5	48	5	3	16/38	24	48	65	1.5	4	7	1.25	2520
PLAF-5-60	5	60	5	3	16/38	30	60	77	1.5	4	7	1.25	2960

NOTE: Additional 2"-3" clearance is recommended above the load for ease of loading and unloading the pallet lifter. \* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT




## ADJUSTABLE FORK PALLET LIFTER w/HAND WHEEL

### FEATURES

- This style of lifter is designed to lift and carry palletized loads efficiently with an overhead crane.
- Supplied standard with a hand wheel to adjust forks to allow the lifter to handle various pallet sizes.
- Counter balanced to hang level when unloaded.
- Easily maintained low headroom design.
- The bail is a lower headroom design and is positioned to avoid side loading the crane hook.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS


- Larger throat openings
- Greater outside fork widths
- Additional sizes and capacities available

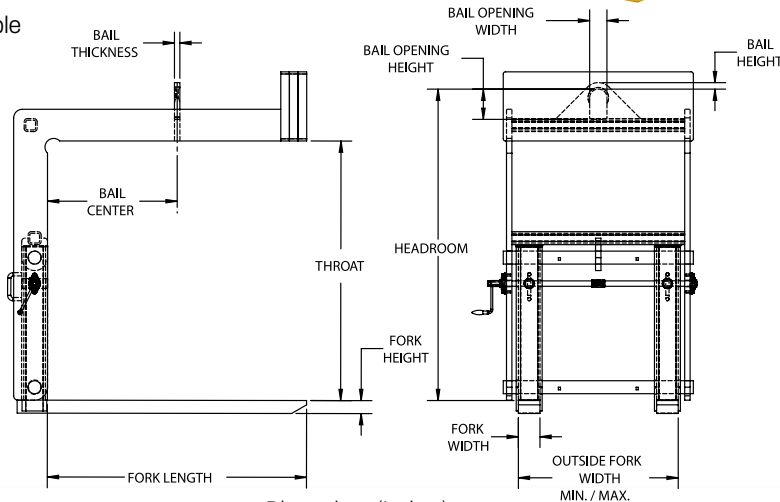

PALLET LIFTERS

Model #	Capacity (US Tons)*	Dimensions (Inches)											Weight (Lbs.)
		Fork Length	Fork Width	Fork Height	Outside Fork Width Min/ Max	Bail Center	Throat Opening Height	Head-room	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
PLHW-1-36	1	36	2	2	16/38	18	48	58	0.88	3	5	0.75	950
PLHW-1-42	1	42	2	2	16/38	21	48	58	0.88	3	5	0.75	1075
PLHW-1-48	1	48	2	2	16/38	24	48	59	0.88	3	5	0.75	1100
PLHW-1.5-36	1.5	36	3	2	16/38	18	48	59	0.88	3	5	0.75	1190
PLHW-1.5-42	1.5	42	3	2	16/38	21	48	59	0.88	3	5	0.75	1265
PLHW-1.5-48	1.5	48	3	2	16/38	24	48	60	0.88	3	5	0.75	1335
PLHW-2-36	2	36	3	2	16/38	18	48	60	0.88	3	5	0.75	1275
PLHW-2-42	2	42	4	2	16/38	21	48	60	0.88	3	5	0.75	1485
PLHW-2-48	2	48	4	2	16/38	24	48	60	0.88	3	5	0.75	1510
PLHW-3-42	3	42	4.5	2.5	16/38	21	48	61.5	1.25	3	5	1	1740
PLHW-3-48	3	48	4.5	2.5	16/38	24	48	61.5	1.25	3	5	1	1900
PLHW-3-54	3	54	4.5	2.5	16/38	27	48	63	1.25	3	5	1	2750
PLHW-4-48	4	48	5	3	16/38	24	48	64	1.25	3	5	1	2210
PLHW-4-60	4	60	5	3	16/38	30	60	76	1.25	3	5	1	3075
PLHW-5-48	5	48	5	3	16/38	24	48	65	1.5	4	7	1.25	2570
PLHW-5-60	5	60	5	3	16/38	30	60	77	1.5	4	7	1.25	3010

NOTE: Additional 2"-3" clearance is recommended above the load for ease of loading and unloading the pallet lifter. \* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# PALLET LIFTERS


## PLHD FIXED FORK HEAVY DUTY PALLET LIFTER

### FEATURES

- This style of lifter is designed with a double frame to lift and carry heavy palletized loads efficiently with an overhead crane.
- Counter balanced to hang level when unloaded.
- Easily maintained low headroom design.
- The bail is a lower headroom design and is positioned to avoid side loading the crane hook.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Larger throat openings
- Greater outside fork widths
- Additional sizes and capacities available

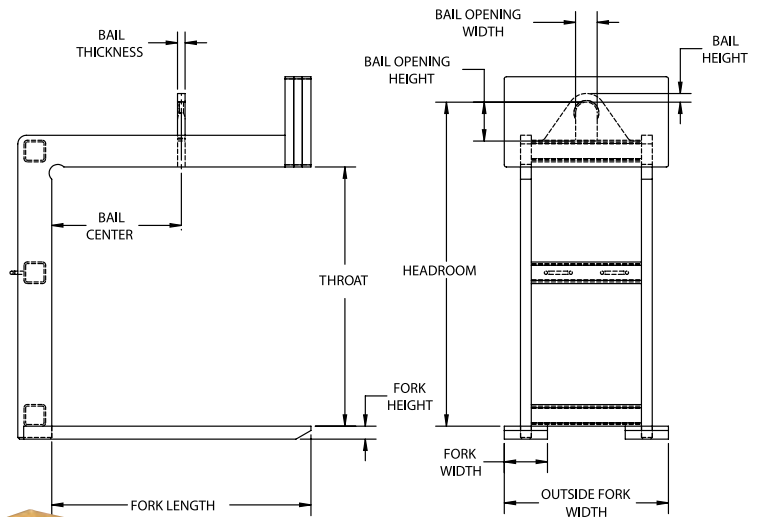

Model #	Capacity (US Tons)*	Dimensions (Inches)											Weight (Lbs.)
		Fork Length	Fork Width	Fork Height	Outside Fork Width	Bail Center	Throat Opening Height	Head-room	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
PLHD-7.5-48	7.5	48	6	3	30	24	48	65	1.50	4	7	1.50	2485
PLHD-7.5-60	7.5	60	8	3	38	30	60	79	1.50	4	7	1.50	3120
PLHD-10-48	10	48	8	3	30	24	48	69	2	5	9	1.75	2540
PLHD-10-60	10	60	10	3	38	30	60	81	2	5	9	1.75	4025
PLHD-15-48	15	48	10	3	38	24	60	84	2	5	9	1.75	2925
PLHD-15-60	15	60	10	3.5	38	30	60	75	2	5	9	1.75	4940
PLHD-20-60	20	60	10	4	38	30	60	88	2.25	6	12	2	5590
PLHD-20-72	20	72	12	4	44	36	60	88	2.25	6	12	2	6300

NOTE: Additional 2"-3" clearance is recommended above the load for ease of loading and unloading the pallet lifter. \* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT




## ADJUSTABLE FORK HEAVY DUTY PALLET LIFTER

### FEATURES

- This style of lifter is designed with a double frame and forged forks to lift and carry heavy palletized loads efficiently with an overhead crane.
- Supplied standard with manually adjustable forks that allow the lifter to handle various pallet sizes.
- Counter balanced to hang level when unloaded.
- Easily maintained low headroom design.
- The bail is a lower headroom design and is positioned to avoid side loading the crane hook.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Larger throat openings
- Greater outside fork widths
- Additional sizes and capacities available

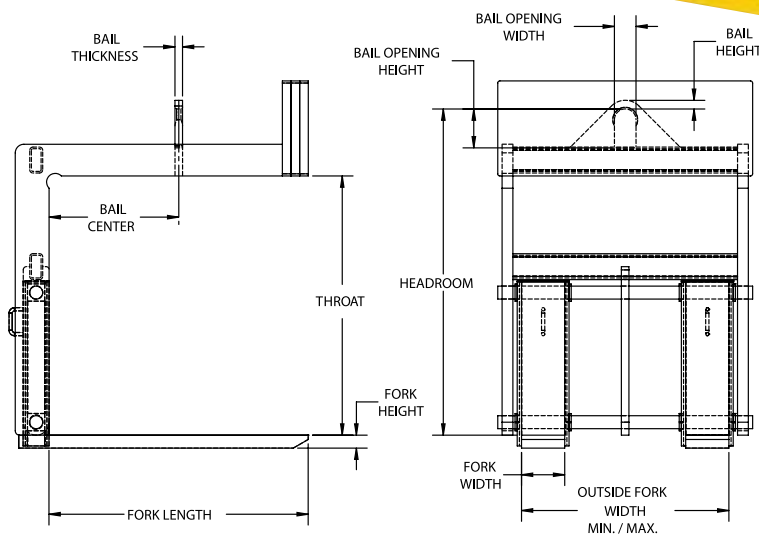

PALLET LIFTERS

Model #	Capacity (US Tons)*	Dimensions (Inches)											Weight (Lbs.)
		Fork Length	Fork Width	Fork Height	Outside Fork Width Min/Max	Bail Center	Throat Opening Height	Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
PLHA-7.5-48	7.5	48	6	3	16/48	24	48	61	1.50	4	7	1.50	3200
PLHA-7.5-60	7.5	60	8	3	20/48	30	60	74	1.50	4	7	1.50	4300
PLHA-7.5-72	7.5	72	10	3	24/48	36	60	76	1.50	4	7	1.50	4900
PLHA-10-48	10	48	8	3	20/48	24	48	64	2	5	9	1.75	3800
PLHA-10-60	10	60	10	3	24/48	30	60	76	2	5	9	1.75	5600
PLHA-10-72	10	72	10	3.5	24/48	36	60	76	2	5	9	1.75	6400
PLHA-12.5-48	12.5	48	8	3	16/48	24	48	78	2	5	9	1.75	5100
PLHA-12.5-60	12.5	60	10	3	24/48	30	60	78	2	5	9	1.75	6200
PLHA-12.5-72	12.5	72	10	3.5	24/48	36	60	78	2	5	9	1.75	7200

NOTE: Additional 2"-3" clearance is recommended above the load for ease of loading and unloading the pallet lifter. \* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.



# PALLET LIFTERS


## PLAH ADJUSTABLE FORK HEAVY DUTY PALLET LIFTER w/Hand Wheel

### FEATURES

- This style of lifter is designed with a double frame and forged forks to lift and carry heavy palletized loads efficiently with an overhead crane.
- Supplied standard with a hand wheel to adjust forks to allow the lifter to handle various pallet sizes.
- Counter balanced to hang level when unloaded.
- Easily maintained low headroom design.
- The bail is a lower headroom design and is positioned to avoid side loading the crane hook.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Larger throat openings
- Greater outside fork widths
- Additional sizes and capacities available

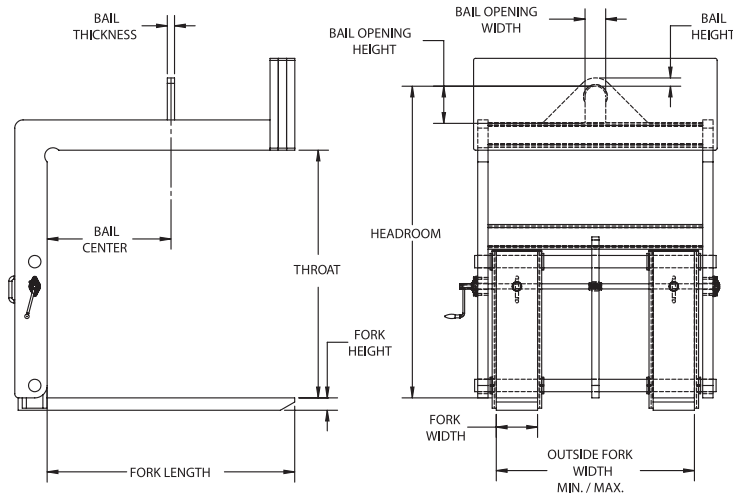

Model #	Capacity (US Tons)*	Dimensions (Inches)											Weight (Lbs.)
		Fork Length	Fork Width	Fork Height	Outside Fork Width Min/Max	Bail Center	Throat Opening Height	Headroom	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	
PLAH-7.5-48	7.5	48	6	3	16/48	24	48	66	1.50	4	7	1.50	3350
PLAH-7.5-60	7.5	60	8	3	20/48	30	60	77.5	1.50	4	7	1.50	4550
PLAH-7.5-72	7.5	72	10	3	24/48	36	60	80	1.50	4	7	1.50	5050
PLAH-10-48	10	48	8	3	20/48	24	48	65.5	2	5	9	1.75	3950
PLAH-10-60	10	60	10	3	24/48	30	60	77.5	2	5	9	1.75	5750
PLAH-10-72	10	72	10	3.5	24/48	36	60	82	2	5	9	1.75	6550
PLAH-12.5-48	12.5	48	8	3	16/48	24	48	82	2	5	9	1.75	5250
PLAH-12.5-60	12.5	60	10	3	24/48	30	60	82	2	5	9	1.75	6350
PLAH-12.5-72	12.5	72	10	3.5	24/48	36	60	82	2	5	9	1.75	7350
PLAH-15-60	15	60	10	3.5	24/48	30	60	82	2	5	9	1.75	7050
PLAH-15-72	15	72	12	3.5	28/48	36	60	82.5	2	5	9	1.75	8450

NOTE: Additional 2"-3" clearance is recommended above the load for ease of loading and unloading the pallet lifter. \* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT



## WHEELED PALLET LIFTER

### FEATURES


- This style of lifter is designed to lift and carry palletized loads efficiently with an overhead crane.
- Wheeled design allows for ease of movement to the load and dual lift points allow the lifter to hang level when unloaded.
- Easily maintained low headroom design.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Larger throat openings
- Replacement wheel kits are available
- Greater outside fork widths
- Additional sizes and capacities available



PALLET LIFTERS

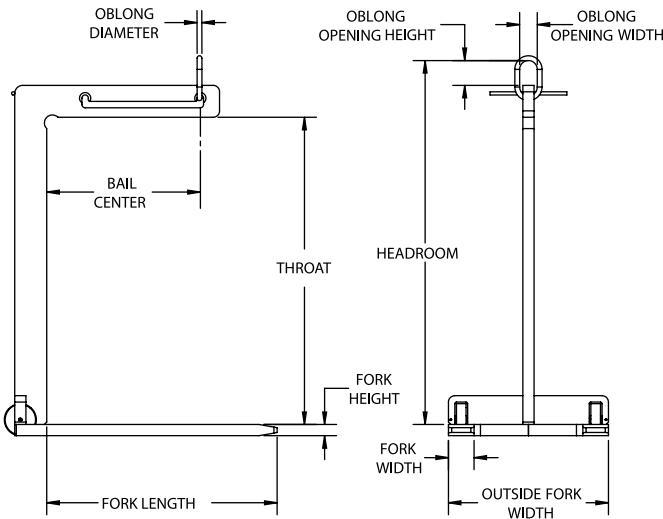

Model #	Capacity (US Tons)*	Dimensions (Inches)										Weight (Lbs.)
		Fork Length	Fork Width	Fork Height	Outside Fork Width	Bail Center	Throat Opening Height	Head-room	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height	
PLWL-1-48	1	36	2	1.75	25	24	48	53	0.63	3	6	255
PLWL-2-48	2	36	4	1.75	25	24	48	57	0.63	3	6	435

NOTE: Additional 2"-3" clearance is recommended above the load for ease of loading and unloading the pallet lifter.

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# PALLET LIFTERS




## LIGHTWEIGHT PALLET LIFTER

### FEATURES

- This style of lifter is designed to lift and carry palletized loads efficiently with an overhead crane.
- Lightweight design allows for ease of movement to the load and dual lift points allow the lifter to hang level when unloaded.
- Easily maintained low headroom design.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Larger throat openings
- Greater outside fork widths
- Additional sizes and capacities available

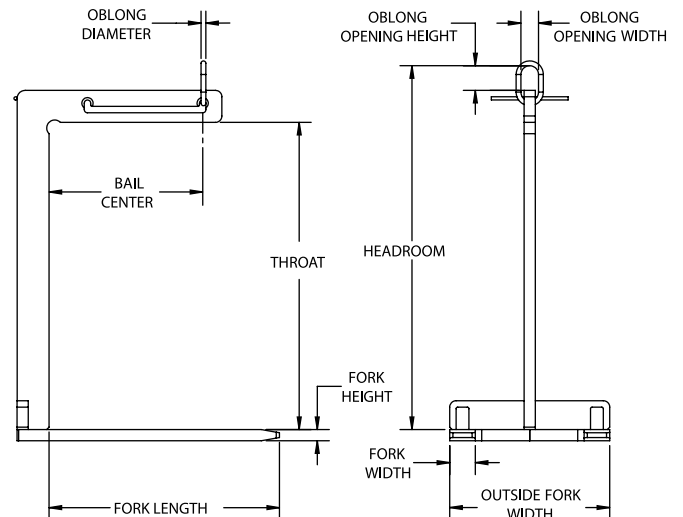

Model #	Capacity (US Tons)*	Dimensions (Inches)										Weight (Lbs.)
		Fork Length	Fork Width	Fork Height	Outside Fork Width	Bail Center	Throat Opening Height	Head-room	Oblong ML Diameter	Oblong ML Opening Width	Oblong ML Opening Height	
PLLW-1-48	1	36	2	1.75	25	24	48	53	0.63	3	6	245
PLLW-2-48	2	36	4	1.75	25	24	48	57	0.63	3	6	425
PLLW-3-48	3	36	5	2	27	24	48	62	1	3.5	7	625

NOTE: Additional 2"-3" clearance is recommended above the load for ease of loading and unloading the pallet lifter.

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

**TRUSTED** IN THE  
**TOUGHEST**  
**ENVIRONMENTS** /  
**PROVEN** EVERYWHERE



With over

**100 YEARS**  
**OF EXPERIENCE**

our Qualified Sales, Engineering, and Manufacturing staff are available to solve all your Below-the-Hook Lifting and Material Handling Equipment requirements.





**TB**  
TELESCOPING FORK TRUCK BOOM..... Page 78



**TBP**  
TELESCOPING PIVOT FORK  
TRUCK BOOM..... Page 79



**FHS**  
FORK TRUCK HOOK..... Page 80



**FHBS**  
FORK TRUCK HOOK BEAM .....Page 81



**FHBD**  
Fork Truck Double Hook Beam ..... Page 82

# LIFTING EQUIPMENT




## TELESCOPING FORK TRUCK BOOM

### FEATURES

- This style of fork truck attachment is designed to efficiently lift and carry loads with a telescoping boom with locking pin allowing for multiple hook positions.
- 12' maximum boom reach and supplied with standard swivel hooks.
- Supplied with standard restraining chain with grab hook and attached handle for ease of boom extension.
- Engineered and manufactured in accordance to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional sizes and capacities available

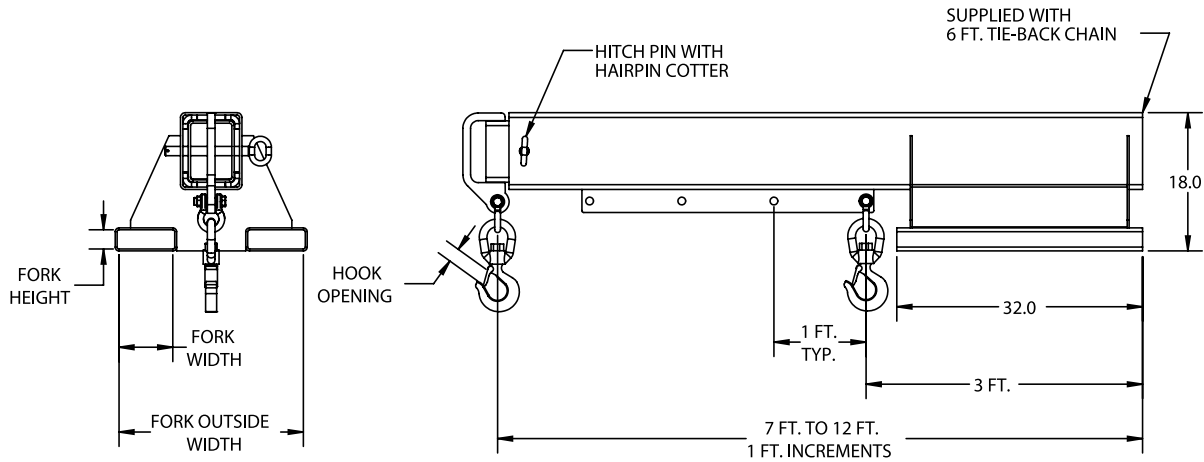

FORK TRUCK ACC.

Model # Fixed	Dimensions (Inches)					Max Capacity at Hook Position (Lbs.)							Weight (Lbs.)
	Fork Opening Height	Fork Opening Width	Fork Outside Width	Headroom	Hook Opening	3' to 6'	7'	8'	9'	10'	11'	12'	
TB-30	2.5	7	22	18	1	3000	3000	2600	2200	1900	1600	1500	490
TB-40	2.5	7	22	18	1.09	4000	3200	2600	2200	1900	1600	1500	490
TB-60	2.5	7	22	18	1.36	6000	5000	4200	3500	3000	2700	2500	565
TB-80	2.5	7	22	18	1.61	8000	7000	5700	4800	4100	3600	3100	750



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# FORK TRUCK ACC.


## TBP TELESCOPING PIVOT FORK TRUCK BOOM

### FEATURES

- This style of fork truck attachment is designed to efficiently lift and carry loads with a telescoping pivot boom with locking pin allowing for multiple hook positions.
- Supplied with standard restraining chain with grab hook and attached handle for ease of boom extension.
- 12' maximum boom reach supplied with standard swivel hooks and can pivot to a vertical height of 6'4".
- Engineered and manufactured in accordance to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional sizes and capacities available.

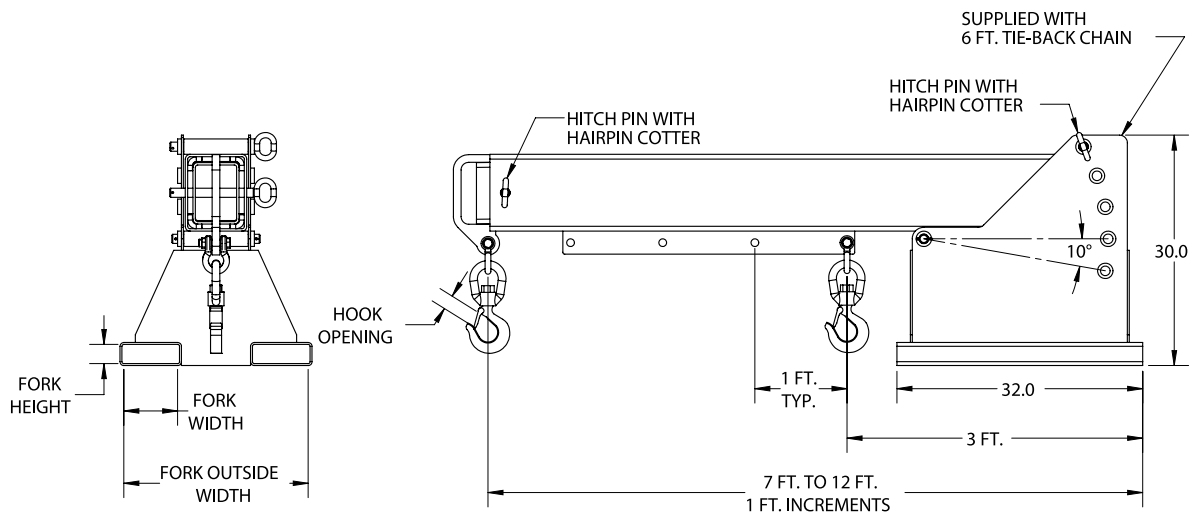

Model # Fixed	Dimensions (Inches)					Max Capacity at Hook Position (Lbs.)							Weight (Lbs.)
	Fork Opening Height	Fork Opening Width	Fork Outside Width	Headroom	Hook Opening	3' to 6'	7'	8'	9'	10'	11'	12'	
TBP-30	2.5	7	22.5	30	1	3000	3000	2600	2200	1900	1600	1500	565
TBP-40	2.5	7	22.5	30	1.09	4000	3200	2600	2200	1900	1600	1500	565
TBP-60	2.5	7	22.5	30	1.36	6000	5000	4200	3500	3000	2700	2500	680
TBP-80	2.5	7	22.5	30	1.61	8000	7000	5700	4800	4100	3600	3100	870



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT

## FHS FORK TRUCK HOOK

### FEATURES


- This style of fork truck attachment is designed to efficiently lift and carry loads on the fork of a lift truck with a single latched swivel hook.
- Easily attaches to the forks.
- Engineered and manufactured in accordance to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**


### OPTIONS




- Additional sizes and capacities available




**PEERLESS  
INSTOCK**

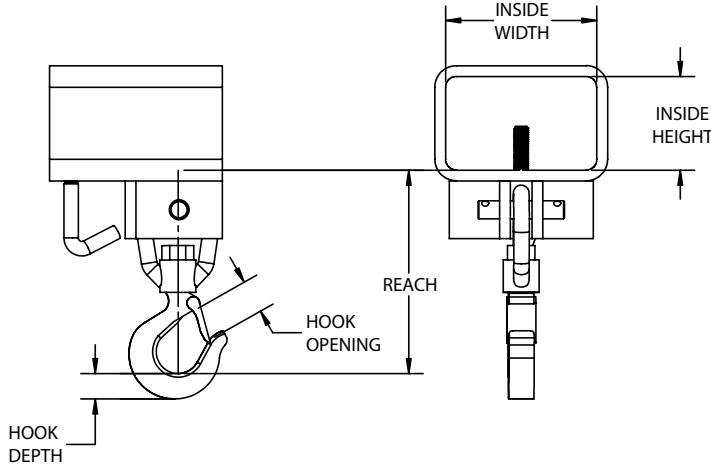 Products eligible for InStock display an IS icon.



Model #	Capacity (US Tons)*	Dimensions (Inches)				Weight (Lbs.)
		Inside Beam Width	Inside Beam Height	Hook Depth	Hook Opening	
 FHS-1.5-4.5	1.5	5.25	3.25	1	1	17
 FHS-1.5-5.5	1.5	6	3	1	1	22
 FHS-1.5-6.5	1.5	7	3	1	1	24

\*1 US Ton = 2,000 Lbs







**PEERLESS**  
QUICK SHIP

**FHBS**

## FORK TRUCK HOOK BEAM


Products eligible for Quick Ship display a QS icon.

### FEATURES

- This style of fork truck attachment is designed to efficiently lift and carry loads on both forks of a lift truck with a single latched swivel hook.
- Easily attaches to the forks.
- Engineered and manufactured in accordance to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Additional sizes and capacities available

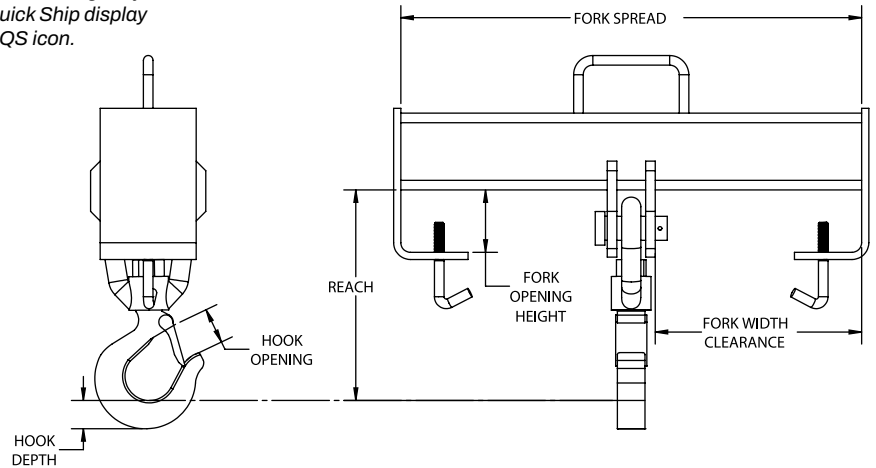

Model #	Dimensions (Inches)							Weight (Lbs.)
	Capacity (US Tons)*	Fork Spread	Fork Opening Height	Fork Width Clearance	Hook Reach Swivel	Hook Depth	Hook Opening	
FHBS-2-20	2	20	3.25	9.13	8.88	1.13	1.16	25
FHBS-5-24	5	24	3.25	10.75	11.44	1.81	1.69	50
FHBS-5-36	5	36	3.25	16.75	11.44	1.81	1.69	80
FHBS-7.5-36	7.5	36	4.25	16.25	15.75	2.25	2.22	175
FHBS-10-36	10	36	4.25	16	16.44	2.59	2.41	190
FHBS-15-36	15	36	4.25	15.88	16.31	2.59	2.41	220

\* 1 US Ton = 2,000 Lbs



**WARNING**

DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# LIFTING EQUIPMENT FORK TRUCK ACC.




## FORK TRUCK DOUBLE HOOK BEAM

### FEATURES

- This style of fork truck attachment is designed to efficiently lift and carry loads on both forks of a lift truck with two latched swivel hooks.
- Easily attaches to the forks.
- Engineered and manufactured in accordance to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS


- Additional sizes and capacities available

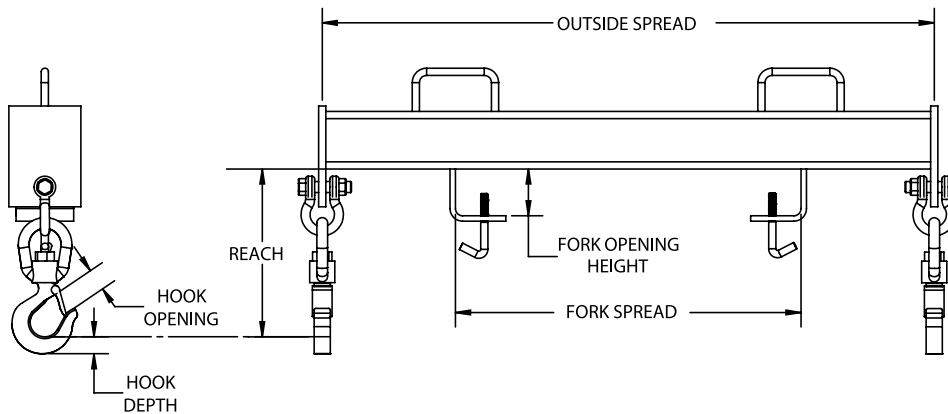

Model #	Capacity (US Tons)*	Dimensions (Inches)						Weight (Lbs.)
		Outside Beam Spread	Fork Spread	Fork Opening Height	Hook Reach	Hook Depth	Hook Opening	
FHBD-2-20	2	36	20	3.25	10.38	1.44	0.91	66
FHBD-5-24	5	42	24	3.25	11.66	1.44	1.36	75

\* 1 US Ton = 2,000 Lbs

FORK TRUCK ACC.



**WARNING**

DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.



## MSHD

Material Stands Heavy Duty ..... Page 84

## MBHD

Material Baskets Heavy Duty ..... Page 86



DO NOT EXCEED CAPACITY!  
See the SAFETY GUIDELINES section before using these products. Pages 88-90.

# MATERIAL HANDLING




## MATERIAL STANDS HEAVY DUTY

### FEATURES

- This style of material handling equipment is designed to hold product at a preset work height.
- Designed and manufactured in pairs to meet your specific height and capacity requirement.
- Standard heavy duty welded steel design.
- Standard rated capacity labels.
- Engineered and manufactured in accordance to ASME B30.20 & BTH-1 Design Category B Service Class 2.

### OPTIONS

- Fork lift transport pockets
- Unpainted tab used for welding
- Spring loaded caster wheels
- Protective padding



# MATERIAL STANDS

Custom Application Form



For pricing information: Fax completed form & contact info to (800)-356-1149

## LOAD INFORMATION:

Describe the material you are planning to set on the stands: \_\_\_\_\_  
\_\_\_\_\_

Does the Material Require Protective Lining  
to Prevent Damage:  Yes  No

Is the Material Hot:  Yes  No

If Yes:

Max Temp \_\_\_\_\_

Required Contact Time with Material: \_\_\_\_\_

Min Cool Down Time: \_\_\_\_\_

Material Dimensions:

	Min (in)	Max (in)
Height	_____	_____
Width	_____	_____
Length	_____	_____
Weight	_____	_____

## MATERIAL STAND INFORMATION:

Required Height: \_\_\_\_\_

Required Width: \_\_\_\_\_

Required Capacity: \_\_\_\_\_

Spring Loaded Caster Wheels (specify floor surface):  
\_\_\_\_\_

Fork Lift Transport Pockets (specify dimensions):

Length: \_\_\_\_\_

Width: \_\_\_\_\_

Height: \_\_\_\_\_

Please provide pertinent application information not supplied above (*extreme product or operating temperature, extreme environmental conditions such as temperature or moisture, space or headroom restrictions, additional specifications*):

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

# MATERIAL HANDLING



## MATERIAL BASKETS HEAVY DUTY

### FEATURES

- This style of material handling equipment is designed to lift, transport and contain product effectively and efficiently.
- Designed and manufactured to meet your specific application requirements.
- Standard heavy duty welded steel design.
- Standard expanded metal or solid side walls and heavy duty hinged door.
- Standard rated capacity labels.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- **Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.**

### OPTIONS

- Fork lift transport pockets
- Caster wheels
- Protective padding
- Chain top rigging
- Wire rope top rigging



# MATERIAL BASKETS

Custom Application Form



# PEERLESS®

For pricing information: Fax completed form & contact info to (800)-356-1149

## LOAD INFORMATION:

Describe the material you are planning to place in the basket: \_\_\_\_\_  
\_\_\_\_\_

Will the Material be placed in the Center of the Basket:  Yes  No  
If No, Please Provide a Drawing or Sketch Indicating the Load Center.

Material Dimensions:		
	Min (in)	Max (in)
Height	_____	_____
Width	_____	_____
Length	_____	_____
Weight	_____	_____

Does the Material Require Protective Lining to Prevent Damage:  Yes  No

## MATERIAL BASKET INFORMATION:

Required Wall Height: \_\_\_\_\_ Width: \_\_\_\_\_ Depth: \_\_\_\_\_ Capacity: \_\_\_\_\_

Door:

Specify Location:  End  Side

Specify Swing:  Right  Left

Other: \_\_\_\_\_

Wall Material:

Solid  Expanded Metal  Open Frame

Other: \_\_\_\_\_

Crane Attachment:

Chain Top Rigging  Wire Rope Rigging  Lifting Beam  Lifting Bracket

Caster Wheels (specify floor surface): \_\_\_\_\_

Fork Lift Transport Pockets (specify dimensions):

Length: \_\_\_\_\_ Width: \_\_\_\_\_ Height: \_\_\_\_\_

Maximum Fork Outside Width: \_\_\_\_\_

Please provide any pertinent application information not supplied above (*extreme product or operating temperature, extreme environmental conditions such as temperature or moisture, space restrictions, additional specifications*):  
\_\_\_\_\_  
\_\_\_\_\_

# SAFETY GUIDELINES

## INDUSTRY STANDARDS

The American Society of Mechanical Engineers (ASME) developed standards that apply specifically to the devices Kito Crosby designs and manufacturers. These standards serve as a guide to government authorities, manufacturers, purchasers and operators of below-the-hook lifting devices.

### ASME B30.20

- Provides detailed information on the classifications, marking, construction, installation, inspection, testing, maintenance and operation of below-the-hook lifting devices.

### ASME BTH-1

- Provides detailed information on the design criteria of below-the-hook lifting devices.



## MARKINGS, IDENTIFICATION & GENERAL CONSTRUCTION

The rated load of the lifting device is visibly marked on the main structure of the device, as well as on a tag attached to the lifter. If the below-the-hook lifting device consists of individually detachable lifters, then each of the individual lifters shall be marked and tagged with their individual rated loads.

All Peerless below-the-hook lifting devices are tagged with the following information:

- Manufacturer's name and address
- Serial number
- Lifter weight, if over 100 lbs. (45 kg)
- Cold current (amps) (when applicable)
- Rated voltage (when applicable)
- Rated load
- Manufacture date
- ASME BTH-1 Design category
- ASME BTH-1 Service class

All Peerless structural and mechanical lifting devices are designed and manufactured by qualified personnel. Peerless engineered designs are in accordance with ASME B30.20 / BTH-1 and incorporate operation conditions along with a detailed examination of allowable stresses to determine fatigue life. Standard products are designed to ASME BTH-1 Design Category B / Service Class 2. Greater Design Categories and Service Classes are available.

## DESIGN CATEGORY

Design category B shall be utilized when the size, scale, and variation of loads applied to the lifter are not always predictable or clearly defined, and where the environmental and loading conditions vary or could be severe.

## SERVICE CLASS

- Service Class is determined by the specified fatigue life of the lifter.
  - Service Class 0 is 0 to 20,000 load cycles.
  - Service Class 1 is 20,001 to 100,000 load cycles.
  - Service Class 2 is 100,001 to 500,000 load cycles.
  - Service Class 3 is 500,001 to 2,000,000 load cycles.
  - Service Class 4 is over 2,000,000 load cycles.

## SERVICE CLASS LIFE

Cycles Per Day	Desired Life (Years)				
	1	5	10	20	30
5	0	0	0	1	1
10	0	0	1	1	2
25	0	1	1	2	2
50	0	1	2	2	3
100	1	2	2	3	3
200	1	2	3	3	4
300	2	3	3	4	4
750	2	3	4	4	4
1,000	2	3	4	4	4

All welding shall be in accordance with AWS D14.1/D14M and ASME BTH-1.

Exposed moving parts such as gears, projecting shafts and chain drives that constitute a hazard under normal operating conditions are guarded.

Electrical equipment and wiring shall comply with ANSI/NFPA 70 and ASME BTH-1.

FOR INFORMATION ON MODIFICATIONS OR REPAIRS TO YOUR LIFTING DEVICE, CONTACT KITO CROSBY TO ENSURE COMPLIANCE WITH THE CURRENT ASME STANDARDS.



## PROOF TEST

100% OF ALL PEERLESS BELOW-THE-HOOK LIFTING DEVICES ARE PROOF-TESTED TO 125% CAPACITY AND CERTIFICATES SUPPLIED AT NO ADDITIONAL CHARGE.

### Requirements & Recommendations:

Requirements of the ASME standard are noted by the word **shall**.

Recommendations of the ASME standard are noted by the word **should**.

## OPERATION PRACTICES FOR LIFTING DEVICES

Below-the-hook lifting devices shall only be operated by the following qualified personnel:

- Personnel designated to operate the lifter.
- Trainees who are under the direct supervision of designated personnel.
- Personnel designated to maintenance and/or conduct testing on the lifter.
- Personnel designated to inspect the lifter.

The operator shall ensure that the weight of the load to be lifted along with its approximate center of gravity have been provided, calculated, or obtained.

The below-the-hook lifting device shall not be overloaded beyond its manufactured rated capacity nor shall it be utilized to handle any load that it was not designed to handle.

The operator shall ensure the lifting device is properly attached to the hook, shackle, or other load handling device.

The operator shall ensure that the lifter is applied to the load in accordance with the instruction manual.

When rigging is utilized in conjunction with the lifter, the operator shall ensure that it is not kinked and the multiple part lines are not twisted around each other.

The operator shall ensure that the load is correctly distributed for the lifter prior to the lift.

The operator shall ensure that the temperature of the load does not exceed the maximum allowable limits of the lifting device.

The operator shall ensure that the load is properly balanced and well secured with the lifting device at the onset of the lift.

The operator shall ensure that the lifter and the load do not come into contact with any obstruction.

The operator shall ensure that the lifter is sufficiently protected from damage during use.

The operator shall ensure that the lifter is not utilized for side pulls or sliding the load unless explicitly authorized by a qualified person.

Before leaving the lifter the operator shall land any attached load and store the lifter in an assigned location. The operator shall ensure that suspended loads are not left unattended.

The operator shall ensure that no person rides the load or the lifter.

The operation of the lifter shall be observed prior to and during a shift. Any observed deficiency in the lifter shall be examined by designated personnel. Any deficiency that constitutes a hazard shall be removed from service and tagged "Out of Service". All hazardous deficiencies shall be reported to qualified personnel for evaluation.

All loads shall be guided in a manner to avoid endangering any part of the body as it is moved, lowered, or if it is accidentally dropped.

### Miscellaneous Operating Practices

An operator shall not utilize a below-the-hook lifter that has an "out of service" tag or has been designated as non-functioning.

Only designated personnel shall be given the authority to remove "Out of service" tags on lifting devices.

When not in use the below-the-hook device should be stored in an assigned location.

Lifter markings and tags shall not be removed or damaged. Lifter markings and tags that are missing or illegible shall be replaced.

## INSPECTION

### Initial Inspection:

Prior to initial use, all new, altered, modified, reinstalled, or repaired lifting devices shall be inspected by a qualified person to ensure compliance with the provisions of the ASME B30.20 standard.

### Inspection Intervals:

Below-the-hook lifters in regular service require three general types of inspection classification procedures; every lift, frequent, and periodic. The intervals for inspection are determinant upon the severity of use of the below-the-hook device, the extent of the exposure to wear and tear, as well as any history of malfunction experienced by the lifter.

# SAFETY GUIDELINES

## Every Lift Inspection:

A visual examination performed by the operator of the below-the-hook lifter conducted prior to and during every lift.

## Frequent Inspection:

Are comprised of visual inspections performed by either the lifter operator or other assigned personnel (records are not required by the ASME standard).

- Normal use – once a month.
- Heavy use – once a week to once a monthly.
- Severe use – once a day to once a week.
- Special or infrequent use – outlined as specified by a qualified individual prior to and following each use.
- Any lifter that has been idle for a period of one month to a year shall undergo a frequent inspection prior to use.

The following items listed below shall be included within the regular inspection schedule and shall be thoroughly inspected and an assessment formed as to the extent of the issue and the level of subsequent hazard resulting from it.

- Structural deformation.
- Cracks in welds or structural members.
- Excessive wear.
  - Loose or missing parts, tags, safety guards, fasteners, stops, and/or housings.
  - Out of adjustment conditions that interfere with the normal operation and functionality of all mechanisms including automatic hold and release components.
  - Unreadable or missing operating control labels.
  - Contact Kito Crosby for replacements of missing identification tags and nameplates.

## Periodic Inspections:

Are comprised of visual inspections performed by assigned personnel who record the current condition of the below-the-hook lifter in order to provide the basis for a continuing program of recorded evaluation. Dated reports for periodic inspections shall be maintained.

- Normal use – annual inspection typically performed on-site.
- Heavy use – disassembly by a qualified individual should be performed semi-annually in order to facilitate a detailed inspection.
- Severe use - disassembly by a qualified individual should be performed quarterly in order to facilitate a detailed inspection.
- Special or infrequent use – outlined as specified by a qualified individual prior to and following each use.

- Any lifter that has been idle for a period of one year or more shall undergo a periodic inspection prior to use.

Below-the-hook lifting devices shall undergo a thorough inspection based upon the previously defined intervals of every lift, frequent, and periodic. Any and all issues such as the following (as listed below) shall be investigated and a conclusion made as to if the extent of the issue and to if it is severe enough in its nature to represent a hazard. Dated inspection reports of the following critical items shall be made.

- All requirements outlined within the frequent inspection process.
- Missing or loose nuts, bolts, or fasteners.
- Fractured gears, pulleys, sheaves, sprockets, bearings, chain and belts.
- Excessive wear of linkages, gears, pulleys, sprockets, sheaves, chain, belts, bearings, hardware, and other mechanical parts.
- Excessive wear at the bail or other load bearing points.
- Unreadable or missing product safety labels, as required by ASME B30.20 standard.

All repairs or modifications shall be documented on dated inspection reports.

## MAINTENANCE:

### Preventive Maintenance:

A preventive maintenance program shall be established and be based on recommendations made by Kito Crosby. It can be determined to be appropriate as designated by a qualified person to add to the maintenance program following a review of the use of the below-the-hook lifter.

Any hazards disclosed during an inspection shall be corrected before the lifting device is put back into service. Any repairs and/or adjustments shall be done only under the direction of or by a qualified person.

Replacement parts shall be equivalent to the Kito Crosby's specifications.

For more information or to purchase a copy of the standard, visit ASME website, [www.ASME.org](http://www.ASME.org).

# GLOSSARY OF TERMS

**Adjustable Bail:** Allows the bail to move left or right of the center of the lifter.

**Auto-Latch:** Used as a mechanical hold in the open position.

**Bail:** A mounting point on a lifter that attaches the top of a lifter directly to a hoist or crane hook.

**Parking Stand:** Used to store a lifter when not in use.

**Center of Gravity (CG):** Is the location of the balance point of a load.

**Certificate of Compliance:** A document signed by an authorized representative of a manufacturer, certifying that a product or batch of products was manufactured in accordance with all other applicable laws and specifications.

**Certificate of Conformance:** A document issued by an authorized party or manufacturer and states that the product meets the required standards or specifications.

**Certificate of Proof Test:** Document that certifies a load test was performed on a lifter.

**Chain Top Rigging:** Multiple leg chain sling attached to the bails on a lifter brought together as a single lifting point on the lifter.

**Chain Wheel:** A pocketed wheel that meshes with a chain to transmit motion.

**Chamfered Drill Holes:** A beveled edge around the hole.

**Counter Balance:** A weight added to a lifter designed to balance the lifter and the load.

**Counter Weight:** A weight added to balance a lifter.

**Direct Drive:** When mechanical parts are driven directly by a motor, without a belt or chain to transmit power.

**Drop Chains:** Chain slings added to the lower lifting lugs.

**Gusset:** Steel plates used for strengthening the structure of a lifter.

**Headroom:** The amount of vertical lift necessary to make and complete a lifting scenario. Considering all things like, the product that is to be lifted, the device doing the lifting, and the amount of free travel space from the crane hoist hook.

**H-Frame Design:** A structural lifter designed in the shape of the letter "H".

**Integrated Beam Stand:** A stand built into a lifter used for proper storage of the lifter.

**Keyed-In Bail:** When a bail fits into a slot cut into the top of the lifter and is welded above and below.

**Keyed-In Lug:** When a lug fits into a slot cut into the bottom of the lifter and is welded above and below.

**Load Pins:** Pin used to attach rigging to a lifter.

**Low Headroom Bail:** Our standard plate bail welded to the top of a lifter.

**Lug:** The point on a lifter that attaches the lower rigging to the lifter.

**Machined Bail:** A bail that has a machined radius designed to reduce wear on the saddle of a hoist or crane hook.

**Machined Rack and Pinion Adjustment:** A machined linear mechanism that is comprised of a circular gear (pinion) that engages with a linear gear (rack).

**Off-Center Load:** Occurs when the balance point of an object is not located directly in the center of the load.

**Pin Style Bail w/Taper:** A pin mounted between two gussets designed to provide an easier fit to larger crane hooks, a taper is machined into the pin used to center the hook.

**Proof Testing to 125%:** of Rated Capacity A load at 125% of the rated capacity of a lifter is applied to demonstrate the fitness of the lifter.

**Recessed Counter Weight:** A counter weight that is moved closer to the bail used to reduce overall length of the lifter.

**Self-Locking:** A lifter or component of that automatically fixes itself in an open or closed position.

**Shackle Lug:** A mounting point on a lifter that attaches a lifting shackle used connect the bottom of the lifter to the load.

## A

ADJUSTABLE BAIL LIFTING BEAM (ABLB)	19-21
ADJUSTABLE LIFTING BEAM (ALB)	18
ADJUSTABLE FORK HEAVY DUTY PALLET LIFTER (PLHA)	72
ADJUSTABLE FORK HEAVY DUTY PALLET LIFTER (w/HAND WHEEL) (PLAH)	73
ADJUSTABLE FORK PALLET LIFTER (PLAF)	69
ADJUSTABLE FORK PALLET LIFTER (w/HAND WHEEL) (PLHW)	70
ADJUSTABLE TELESCOPIC SPREADER BEAM (ATSB)	34

## B

BAR TONG ADJUSTABLE (BTA)	60
BASKET SLING LIFTING BEAM (BSLB)	12-14
BOX SPREADER BEAM (BXS)	35

## C

CHLORINE GAS CYLINDER LIFTING BEAM (CGCLB)	29
COIL GRAB VERTICAL (CGV)	54
COIL LIFTER (CL)	51
COIL LIFTERS	49-57
COIL GRAB VERTICAL (CGV)	54
COIL LIFTER (CL)	51
COIL LIFTER NARROW COIL (CLNC)	50
COIL LIFTER CLOSE STACKING (CLCS)	52
COIL LIFTER SLIT COIL (CLSC)	53
COIL LIFTER TELESCOPIC TWO SIDED (CLT)	55
NARROW ARM COIL LIFTER (NACL)	56
COIL LIFTER NARROW COIL (CLNC)	50
COIL LIFTER CLOSE STACKING (CLCS)	52
COIL LIFTER SLIT COIL (CLSC)	53
COIL LIFTER TELESCOPIC TWO-SIDED (CLT)	55
CUSTOM APPLICATION FORM	30, 42, 48, 57, 61, 65, 85, 87
COIL LIFTER	57
LIFTING BEAMS	30
MATERIAL BASKETS	87
MATERIAL STANDS	85
ROLL LIFTER	48
SHEET LIFTER	65
SPREADER BEAMS	42
TONG	61

## D

DUAL CRANE LIFTING BEAM (DCLB)	15-16
DUAL CRANE ROTATING BEAM (DCRB)	28

## E

END CAP	40
END CAP PIPE	40-41
END CAP SPREADER BEAM	36-39

## F

FIXED FORK HEAVY DUTY PALLET LIFTER (PLHD)	71
FIXED FORK PALLET LIFTER (PL)	68
FORK TRUCK ACCESSORIES	77-82
FORK TRUCK DOUBLE HOOK BEAM (FHBD)	82
FORK TRUCK HOOK (FHS)	80
FORK TRUCK HOOK BEAM (FHBS)	81
TELESCOPING FORK TRUCK BOOM (TB)	78
TELESCOPING PIVOT FORK TRUCK BOOM (TBP)	79
FORK TRUCK DOUBLE HOOK BEAM (FHBD)	82
FORK TRUCK HOOK (FHS)	80
FORK TRUCK HOOK BEAM (FHBS)	81
FOUR POINT ADJUSTABLE BEAM (FPAB)	27
FOUR POINT LIFTING BEAM (FPLB)	25
FOUR POINT SACK LIFTING BEAM (FPSL)	26

## G H I J K

## L

LIFTING BEAMS	04-30
ADJUSTABLE BAIL LIFTING BEAM (ABLB)	19-21
ADJUSTABLE LIFTING BEAM (ALB)	18
BASKET SLING LIFTING BEAM (BSLB)	12-14
CHLORINE GAS CYLINDER LIFTING BEAM (CGCLB)	29
DUAL CRANE LIFTING BEAM (DCLB)	15-16
DUAL CRANE ROTATING BEAM (DCRB)	28
FOUR POINT ADJUSTABLE BEAM (FPAB)	27
FOUR POINT LIFTING BEAM (FPLB)	25
FOUR POINT SACK LIFTER BEAM (FPSL)	26
LOAD LEVELING BEAM (LLB)	22-23
SHORT SPAN LIFTING BEAM (SSLB)	05
STANDARD DUTY LIFTING BEAM (CHANNEL DESIGN) (SDLB)	06-08
STANDARD DUTY LIFTING BEAM (I-BEAM DESIGN W/FLAME CUT BAIL) (SDLB)	09-10
STANDARD DUTY LIFTING BEAM (I-BEAM DESIGN W/PIN BAIL) (SDLB)	11
THREE POINT LIFTING BEAM (TPLB)	24
UNIVERSAL LIFTING/SPREADER BEAM (UNVB)	17
LIGHTWEIGHT PALLET LIFTER (PLW)	75
LOAD LEVELING BEAM (LLB)	22-23

## M

MATERIAL BASKETS HEAVY DUTY (MBHD)	86
MATERIAL HANDLING	83-87
MATERIAL BASKETS HEAVY DUTY (MBHD)	86
MATERIAL STANDS HEAVY DUTY (MSHD)	84
MATERIAL STANDS HEAVY DUTY (MSHD)	84
MOTORIZED ROLL LIFTER (MRL)	45
MOTORIZED SHEET LIFTER HEAVY DUTY (MSLHD)	64

## N

NARROW ARM COIL LIFTER (NACL)	56
-------------------------------	----

## O

## P

PALLET LIFTERS	67-75
ADJUSTABLE FORK HEAVY DUTY PALLET LIFTER (PLHA)	72
ADJUSTABLE FORK HEAVY DUTY PALLET LIFTER (w/HAND WHEEL) (PLAH)	73
ADJUSTABLE FORK PALLET LIFTER (PLAF)	69
ADJUSTABLE FORK PALLET LIFTER (w/HAND WHEEL) (PLHW)	70
FIXED FORK HEAVY DUTY PALLET LIFTER (PLHD)	71
FIXED FORK PALLET LIFTER (PL)	68
LIGHTWEIGHT PALLET LIFTER (PLW)	75
WHEELED PALLET LIFTER (PLWL)	74

## Q

## R

ROLL LIFTERS	43-48
MOTORIZED ROLL LIFTER (MRL)	45
ROLL GRIPPING TONGS (RGT)	46
ROLL LIFTING BEAM (RLB)	44
ROLL LIFTING C-HOOK (RLCH)	47
ROLL GRIPPING TONGS (RGT)	46
ROLL LIFTING BEAM (RLB)	44
ROLL LIFTING C-HOOK (RLCH)	47

## S

SAFETY GUIDELINES	88-90
SHEET LIFTERS	62-65
MOTORIZED SHEET LIFTER HEAVY DUTY (MSLHD)	64
SHEET LIFTER HEAVY DUTY (SLHD)	63
SHEET LIFTER HEAVY DUTY (SLHD)	63
SHORT SPAN LIFTING BEAM (SSLB)	05
SPREADER BEAMS	31-42
ADJUSTABLE TELESCOPIC SPREADER BEAM (ATSB)	34
BOX SPREADER BEAM (BXS)	35
END CAP SPREADER BEAM (ECSB)	36-39
STANDARD DUTY SPREADER BEAM (SDSB)	32-33
STANDARD DUTY LIFTING BEAM (CHANNEL DESIGN) (SDLB)	06-08
STANDARD DUTY LIFTING BEAM (I-BEAM DESIGN W/FLAME CUT BAIL) (SDLB)	09-10
STANDARD DUTY LIFTING BEAM (I-BEAM DESIGN W/PIN BAIL) (SDLB)	11
STANDARD DUTY SPREADER BEAM (SDSB)	32-33

## T

TELESCOPING FORK TRUCK BOOM (TB)	78
TELESCOPING PIVOT FORK TRUCK BOOM (TBP)	79
THREE POINT LIFTING BEAM (TPLB)	24
TONGS	59-61
BAR TONG ADJUSTABLE (BTA)	60

## U

UNIVERSAL LIFTING/SPREADER BEAM (UNVB)	17
--	----

## V

## W

WHEELED PALLET LIFTER (PLWL)	74
------------------------------	----

## XYZ



### Peerless BTH & Material Handling Equipment

South Holland, Illinois  
800-334-5643  
CustomLifting.PCC@kitocrosby.com

#### Warranty:

The goods sold in this catalog are warranted free from defects in workmanship and materials for 12 months from the ship date.

#### Disclaimer of warranties:

No other warranty, express or implied, including the implied warranty of merchantability or fitness for particular purpose, is given and no affirmation of Kito Crosby, by words or action, shall constitute a warranty. Kito Crosby will not pay any claim for labor on any of its products or for delays or damages by reason on their use.

#### Buyer's Remedies:

Buyer's sole remedy for breach of any warranty is limited exclusively to obtaining, at the discretion of Kito Crosby, either repair or replacement of any product sold hereunder and manufactured by Kito Crosby. In no event shall Kito Crosby be liable for any incidental or consequential damages. Buyer must notify Kito Crosby, in writing, within 10 days of discovery of the alleged defect, if within the warranty period stated above. After receiving authorization from Kito Crosby, product shall be returned to the Kito Crosby plant, transportation prepaid, within 30 days.

**Return Goods Policy:** Items purchased from this catalog are returnable ONLY when pre-authorized by a Kito Crosby Customer Service Representative, who will issue a Return Authorization Number. This number must be displayed PROMINENTLY on the return material shipping containers AND the carrier's freight bill. UNAUTHORIZED SHIPMENTS WILL BE REFUSED AND RETURNED AT THE SENDER'S EXPENSE. All authorized returns must be sent prepaid to Winona, MN, South Holland, IL, Mount Pleasant, PA, or Clackamas OR, and are subject to restocking and repackaging charges. Any product not returned in original saleable condition will be subject to an additional reconditioning charge.

**Claims and Shortages:** Kito Crosby is willing to assist you in collecting claims for lost or damaged goods, however we are not responsible for collection of claims or replacement of merchandise. All requests for assistance must be accompanied by a copy of the freight bill noting the shortage or damage and signed by the delivering carrier's driver. All requests made to Kito Crosby must be received within 30 days of date of delivery.

**Minimum Invoice:** The minimum invoice allowed is \$100. A \$10 charge will be applied to any invoice below this amount.



Peerless is a product brand of Kito Crosby, the global leader of the lifting and securement industry it pioneered, and for which it continues to set the quality standard. With global engineering, manufacturing, distribution, and operations, the company provides a broad range of products and solutions for the most demanding applications. Our iconic brands include Kito, Crosby, Harrington, Gunnebo Industries, and Peerless. Kito Crosby's people, products, solutions, and service have innovated the lifting and securement industry for more than 250 years. Together we lift and secure the world today, for a safer, stronger, and more productive tomorrow.

Our website features detailed product specifications, safety guidelines, component references and additional information in a downloadable format. Conveniently search by keywords or item number to learn more about a specific product to determine your exact needs. Information is neatly organized in categories to save you time when searching.

Learn more about our company and products; download current literature and much more!

**[kitocrosby.com/peerless](https://www.kitocrosby.com/peerless)**

